




## PROJECT

## TYPE

## NOTES

## QUANTITY

## DATE

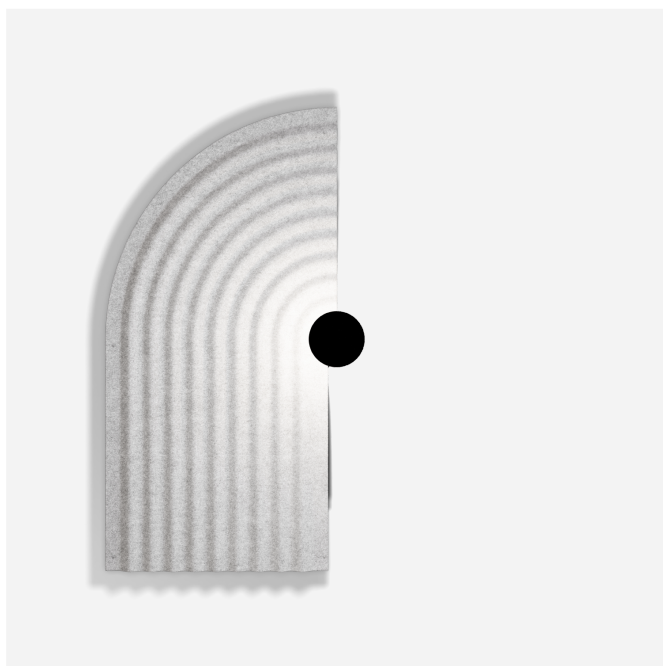

## GENERAL

Wall  
Surface  
Felt Marble Grey  
IP20  
Interior  
CIE flux code: 12 40 73 85 100

## LED

3000 K  
CRI  $\geq$  90  
L80 / 50000h  
initial MacAdam  $\leq$  3 SDCM


## ELECTRICAL

phase-cut dim  
220 - 240 V  
system 8.3 W  
Class 1


## PHYSICAL

length 325 mm  
width 120 mm  
height 650 mm  
1.14 kg

## LIGHT DISTRIBUTION



Wall surface luminaire integrated in an acoustic element made of high quality PET felt with sound absorbing properties; 100% recyclable; surface Felt Marble Grey; PCB 3-step binning; phase-cut dim; light colour 3000 K; binning initial MacAdam  $\leq$  3 SDCM; CRI  $\geq$  90; indirect light distribution; 220 - 240 V; degree of protection IP20; Class 1; driver included;




**Maintenance Factor**

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.97	0.94	0.91	0.87	0.84
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

<sup>a</sup>According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.