

# FLOS

## Foglio

Designed by Tobia Scarpa, 1966

Halogen - 2 x 100W

Wall lamp providing direct/indirect/partially diffused light. Wall fitting in powder-painted polished white pressed steel. Diffuser in powder-painted polished. Two nylon injection molded white lamp holder supports.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8059607016015
Mounting	Wall
Environments	Indoor dry location
Light source type	Bulb
Light sources included	No
Lamp category	Halogen
Lamp holders	E27
Ilcos	HSGS
Number of lamps	2
Power (W)	100

### Physical

Colour	
Length (mm)	370
Net weight (kg)	3.63
Package height (mm)	145
Package width (mm)	400
Package length (mm)	240
Package volume (m3)	0.0120
IP internal	

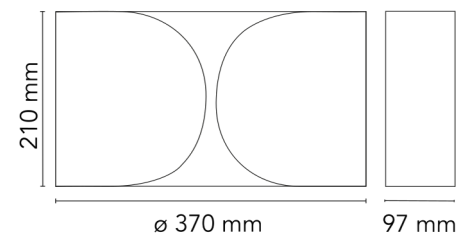

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files

LDT / IES [↓ LDT](#)

### Technical Drawings

2 [↓ ZI](#)

D [↓ P](#)

3 ZI

D P




<https://professional.flos.com/en/global/product/foglio-f2400057/>

F2400057

© 2023 Flos. All rights reserved. 2023/05/25

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

## Schematic light drawing



Beam Angle: 83°		
h(m)	E(lx)	D(m)
1	185	1.84
2	46	3.68
3	21	5.51
4	12	7.35
5	7	9.19

Luminous flux luminaire  
1250 lm

### Photometric

Light distribution Asymmetric

Extreme cut off No

### Electrical

Insulation class I

Frequency (Hz) 50/60

Main voltage (Vac) 220-250

Dimmable Yes

Dimming interface Remote Dimmable  
(Dimmer Not Included)

Batteries inside No

## Bulbs



NOT INCLUDED

RF32563

LED Lamp 11.5W E27 220-240V

2700K A70




NOT INCLUDED

RF32564

LED Lamp 11.5W E27 220-240V

3000K A70

## Spare Parts

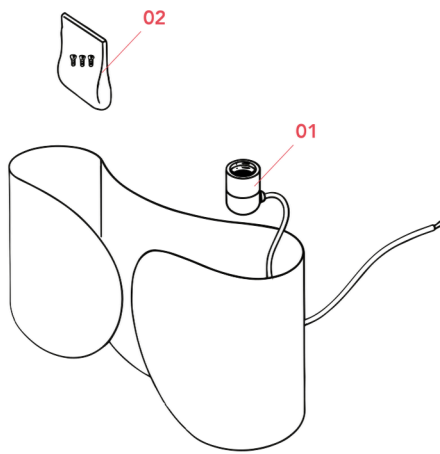

01. Lamp holder assembly

RF2400100

02. Kit with 3 screws m3

RF06296



RF2400100

Lamp holder assembly



RF06296

Kit with 3 screws m3