



## Levels Ceiling 3 Bodies Ø420mm + Ø320mm + Ø220mm

Nahtrang Studio

Ceiling fixture Levels Ceiling 3 Bodies Ø420mm + Ø320mm + Ø220mm LED 28 SW 2700-3000-4000K CASAMBI Black 2035lm

### Technical features


Luminaire total power: 28W  
Real lumens: 2035 (3000K)  
Real lm/W: 73  
Correlated Colour Temperature (CCT): SW 2700-3000-4000K  
Lens / reflector angle: HORIZONTAL 101°  
Structure material: Steel  
Structure finish: Black  
Diffuser material: Glass  
Diffuser finish: Fumé  
Voltage / frequency: 110-277V/50-60Hz  
Dimming protocol: CASAMBI  
Power Factor: NULL  
Useful life: 50,000h L80B20  
Warranty: 5 years  
Easily recyclable luminaire



### Luminotechnic features

CRI: 90  
MacAdam steps: 3  
Photobiological risk: RG1

| Lampholder | Quantity | Light source power (W) |
|------------|----------|------------------------|
| LED        | 1        | 24.4W                  |

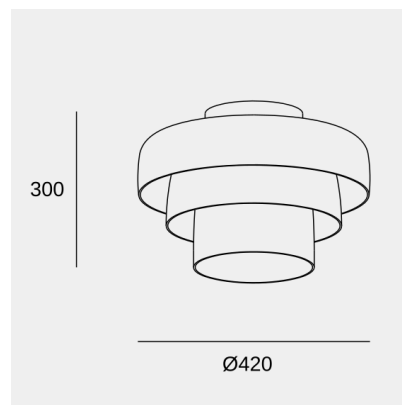

This product may require programming by a specialist. LedsC4 offers consulting services on control systems and programming in the factory or on-site. Ask your sales agent for more info.

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.




## Levels Ceiling 3 Bodies Ø420mm + Ø320mm + Ø220mm

Nahtrang Studio

Ceiling fixture Levels Ceiling 3 Bodies Ø420mm + Ø320mm + Ø220mm LED 28 SW 2700-3000-4000K CASAMBI Black 2035lm

### Bluetooth range



The Bluetooth range largely depends on the obstacles and architectural features of a space, such as walls and building materials

### Logistics



x 1

Net weight (kg): 5.87

Packaged weight (kg): 7.96

Packaging: 1020mm x 610mm x 420mm

This product may require programming by a specialist. LedsC4 offers consulting services on control systems and programming in the factory or on-site. Ask your sales agent for more info.

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.