



Gong ø600

Francesc Vilaró

Pendant Gong ø600 LED 27.4W 3000K PHASE CUT Verd RAL 6003 matt Teixit Verd 1688lm

Technical features

Luminaire total power: 27.4W

Real lumens: 1688

Real lm/W: 62

Correlated Colour Temperature (CCT): 3000K

UGR: <=19

Structure material: Steel

Structure finish: Verd RAL 6003 matt, Teixit Verd

Diffuser material: Methacrylate

Diffuser finish: MICROPRISMA, Matt

Driver Brand: HEP

Voltage / frequency: 220-240V/50-60Hz

Dimming protocol: PHASE CUT

Power Factor: 0.98

Useful life: 50,000h L80B20

Warranty: 5 years



Luminotechnic features

Luminance C0°G65°: 2493

Luminance C90°G65°: 2493

CRI: 92

MacAdam steps: 5

Photobiological risk: RG1

UGR	
S=0.250	
Ceiling / cavity	0.7
Walls	0.5
Working Plane	0.2
Room dimensions	X=4H, Y=8H
UGR crosswise	18.6
UGR lengthwise	18.6

Lampholder	Quantity	Light source power (W)
LED	1	24.3W



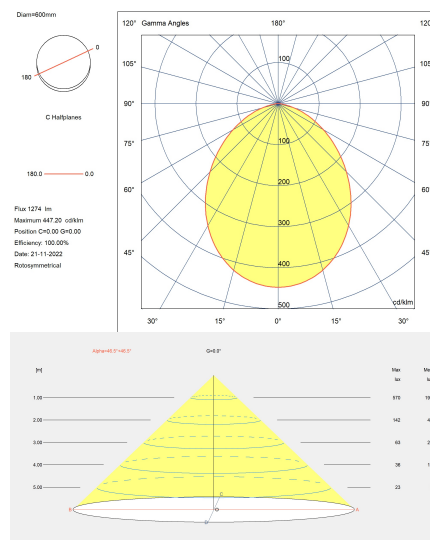


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

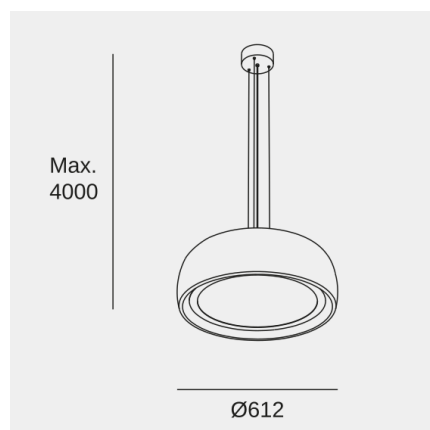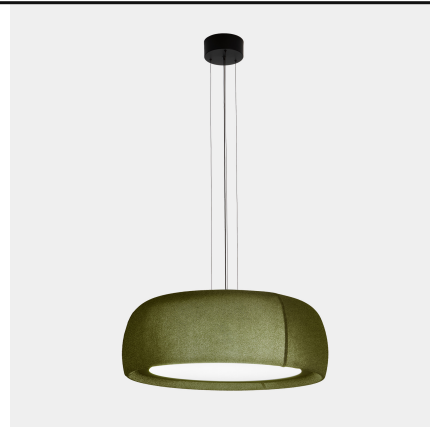

Gong ø600

Francesc Vilaró

Pendant Gong ø600 LED 27.4W 3000K PHASE CUT Verd RAL 6003 matt Teixit Verd 1688lm

Logistics



x 1

Net weight (kg): 6.24

Packaged weight (kg): 10.05

Packaging: 645mm x 645mm x
340mm

Light application



Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.