


## ASSEMBLY INSTRUCTIONS

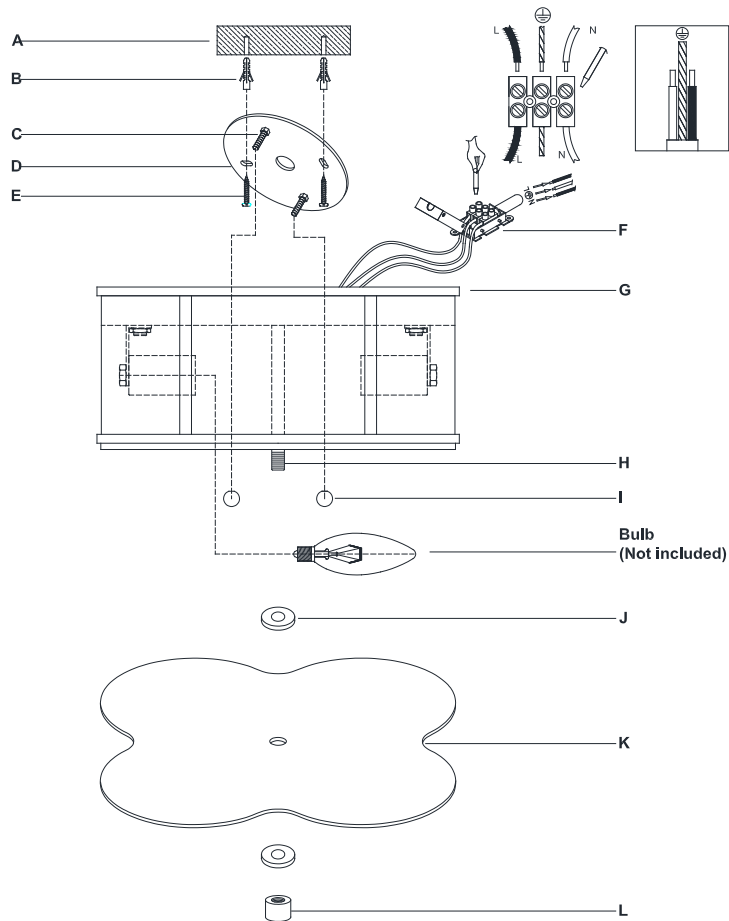

## 220 Volt Basil Small Flush Mount

Item # AH 4014-EU

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

**NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.**

1. Carefully remove all parts from the box.
2. Drill 2 holes on the ceiling (A) and make sure the distance will match to the holes in the mounting plate (D) exactly.
3. Install the mounting plate (D) to the ceiling by mounting screws (E) provided.
4. Loosen the screws on the wiring box (F) to fit the wire from the ceiling box and fixture.
5. Attach the ground wire from the fixture (green or bare copper) to ground wire from the ceiling box.

IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.

6. Connect the Hot wire from the fixture to the hot wire from the ceiling box.
7. Repeat this procedure for the Neutral wire from the fixture to the neutral wire from the ceiling box.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

8. Attach the fixture (G) onto the mounting plate (D). Let screws (C) pass through the holes on the top of the fixture, and secure with finials (I).
9. Insert bulbs (not included) into the sockets.
10. Install the diffuser (K) to the fixture bottom (H) and secure with washers (J) and finial (L).
11. Installation is complete, turn on power at fuse or circuit breaker.

\*\*\*Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.