


ASSEMBLY INSTRUCTIONS

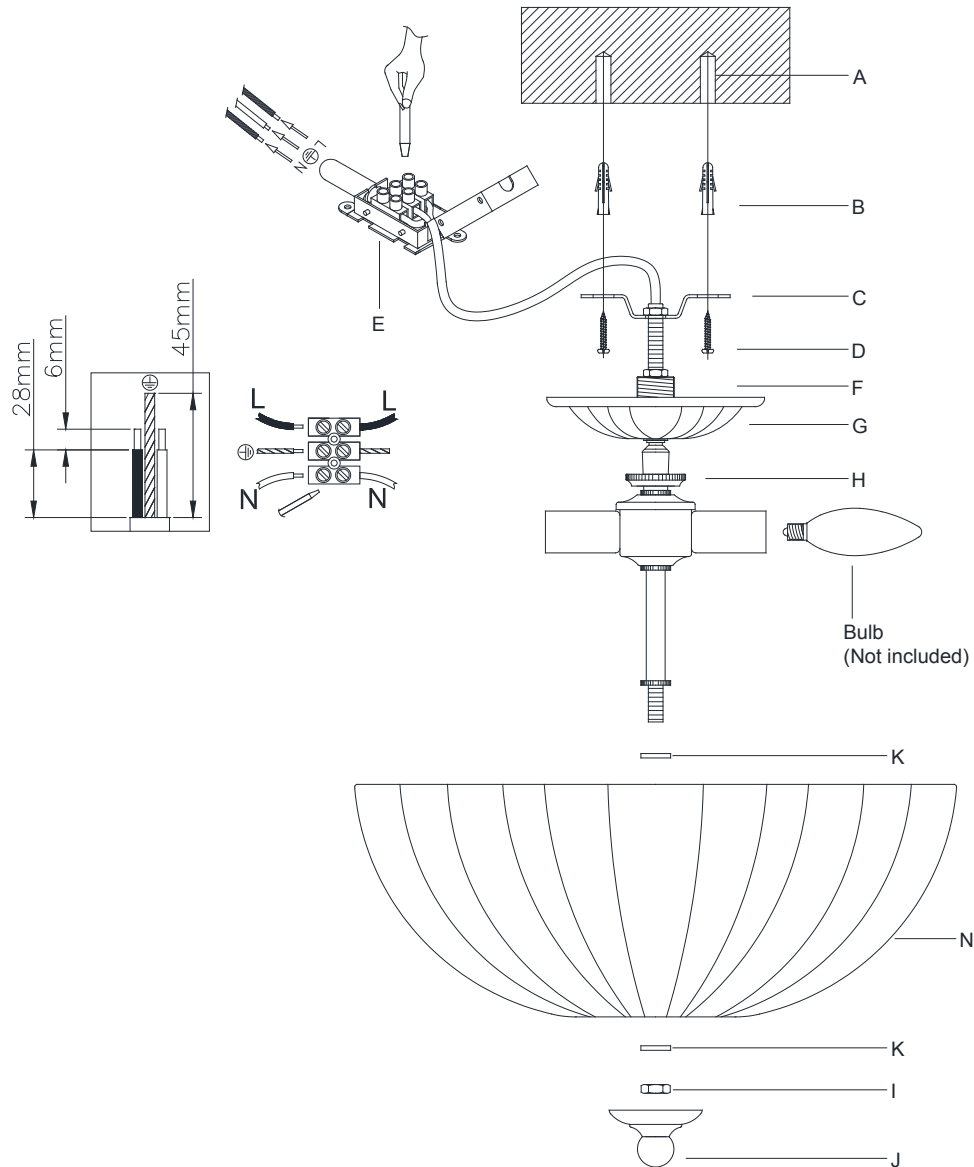

220 Volt Rosehill Large Flush Mount

Item # ARN 4001-EU

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

1. Carefully remove all parts from the box.
2. Drill 2 holes (A) on the ceiling and make sure the hole distance will match to the crossbar (C) holes.
3. Knock the anchors (B) into the ceiling holes (A).
4. Install the crossbar (C) to the ceiling and secure with mounting screws (D).
5. Cut the cord & ground wire up through 6" length beyond the canopy.
6. Loosen the screws on the wiring box (E) to fit the wire from your house and the fixture.
7. Connect the ground wire (green or yellow) to the wiring box (E).
IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
8. Connect the hot wire to the wiring box (E).
9. Repeat this procedure for the neutral wire .
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
10. Tuck these wire connection neatly into ceiling with screws.
11. Attach canopy (G) to the ceiling loop (F) and secure with lock collar (H).
12. Insert bulbs (not included) into the sockets.
13. Place plastic washer (K) then glass shade (N) on the center pipe. Place another plastic washer (K) and secure with nut (I), finial (J).
14. Installation is complete, turn on power at fuse or circuit breaker.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.



VISUAL COMFORT & Co. Est. 1987