


## ASSEMBLY INSTRUCTIONS

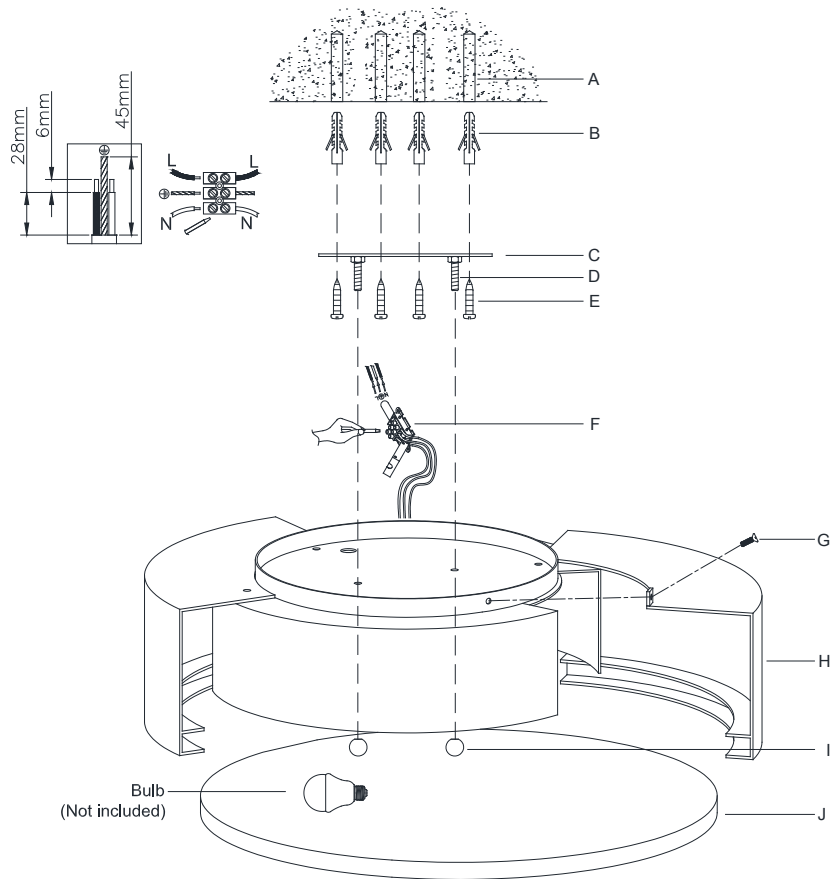

## 220 Volt Melange Large Flush Mount Lamp

Item # KW 4013-EU

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

**NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.**

1. Carefully remove all parts from the box.
2. Remove the mounting plate (C) from the fixture body (H) by loosening the finial (I).
3. Drill 4 holes (A) on the wall and make sure the hole distance will match to the mounting plate (C) holes.
4. Knock the anchors (B) into the wall holes.
5. Affix mounting plate (C) onto the wall and secure with mounting screws (E).
7. Loosen the screws on the wiring box (F) to fit the wire from your house and the fixture.
8. Connect the ground wire (green or yellow) to the wiring box (F).
- IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
9. Connect the hot wire (BROWN) to the wiring box (F).
10. Repeat this procedure for the neutral wire (BLUE).
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
11. Attach the fixture body (H) onto the mounting plate (C), let screws (D) pass through the holes on the top of the fixture, and secure with finial (I).
12. Remove the screws (G) from the fixture body (H), then open it.
13. Insert bulbs (not included) into the sockets.
14. Install the alabaster (J) to the bottom of the fixture body (H) and secure tightly with screws (G).
15. Installation is complete, turn on power at fuse or circuit breaker.

\*\*\*Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.



**VISUAL COMFORT & Co.** Est. 1987