


ASSEMBLY INSTRUCTIONS

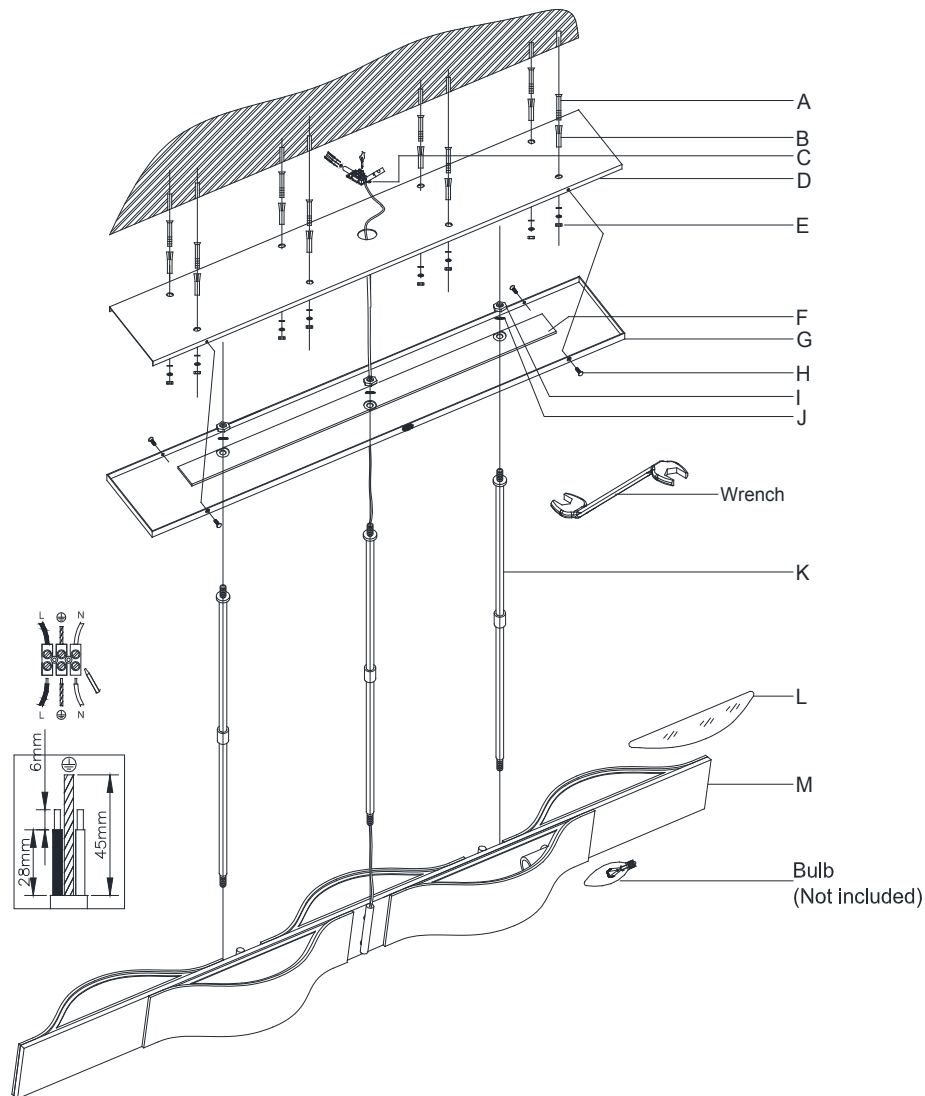

220 Volt Avant Large Linear Pendant

Item # KW 5523-EU

WARNING*THE EXTERNAL FLEXIBLE CABLE OR CORD OF THIS LUMINAIRE CAN NOT BE REPLACED, IF THE CORD IS DAMAGED, THE LUMINAIRE SHALL BE DESTROYED. WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.


ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

1. Carefully remove all parts from the box.
2. Remove the mounting plate (D) from the canopy (G) by loosening side screws (H).
3. Drill 8 holes on the ceiling and make sure the hole distance will match to the holes on the mounting plate (D) exactly.
4. Knock the expansion pipes (B) and screws (A) onto the ceiling holes and make sure they are flat.
5. Install the mounting plate (D) to the ceiling by nuts (E) provided.
6. Thread the tube (K) to the fixture body (M).
7. Attach the canopy (G), fortified plate (F) to the tube (K) and secure with spring washer (J), nuts (I) by using the wrench.
8. Insert bulbs (not included) into the sockets.
9. Attach the glass (L) into the bottom of the fixture body (M) and secure by bending the tabs, then put the other glass (L) on the top of the fixture body (M).
10. Loosen the screws on the wiring box (C) to fit the wire from the ceiling box and fixture.
11. Attach the ground wire from the fixture (green or bare copper) to ground wire from the ceiling box.

IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.

ASSEMBLY INSTRUCTIONS

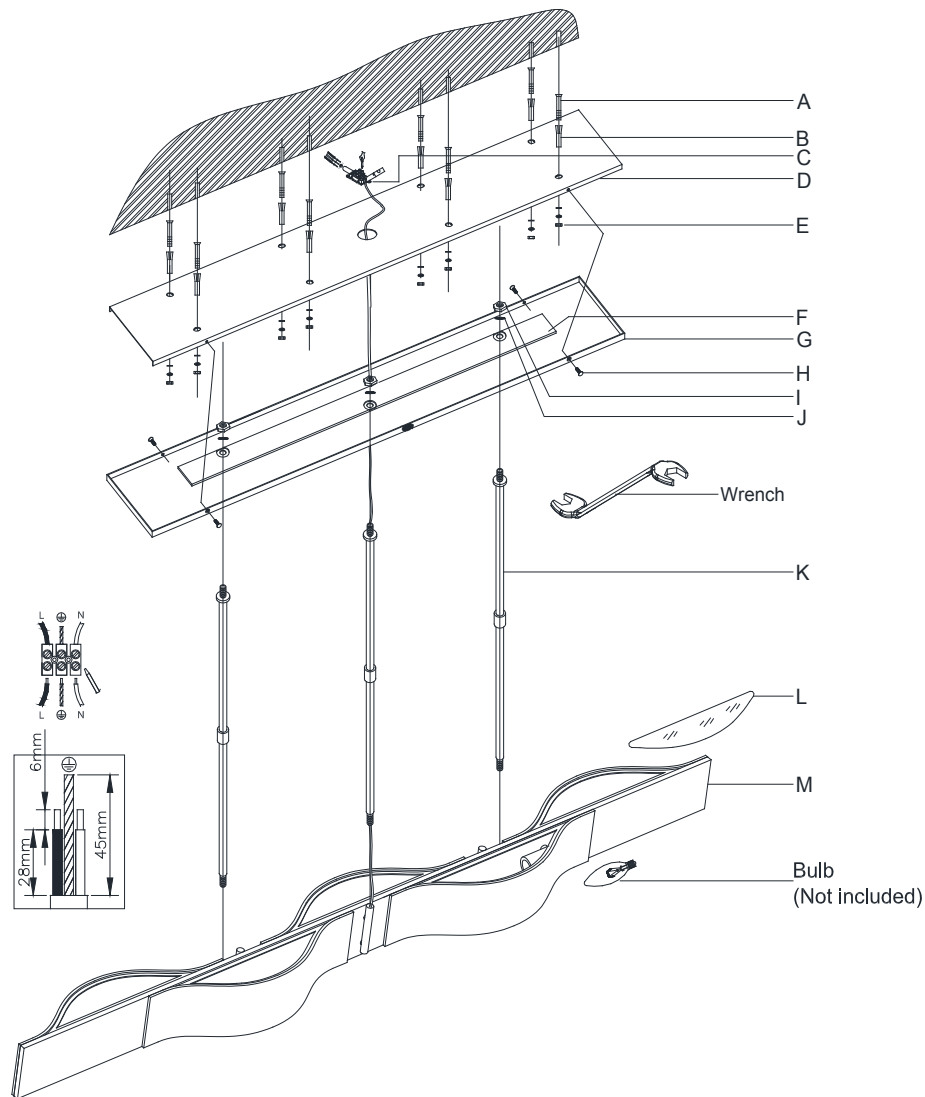

220 Volt Avant Large Linear Pendant

Item # KW 5523-EU

WARNING*THE EXTERNAL FLEXIBLE CABLE OR CORD OF THIS LUMINAIRE CAN NOT BE REPLACED, IF THE CORD IS DAMAGED, THE LUMINAIRE SHALL BE DESTROYED. WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

12. Connect the Hot wire from the fixture to the hot wire from the ceiling box.

13. Repeat this procedure for the Neutral wire from the fixture to the neutral wire from the ceiling box.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED

14. Put canopy (G) to the mounting plate (D), then secure with side screws (H).

15. Installation is complete, turn on power at fuse or circuit breaker.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.