


ASSEMBLY INSTRUCTIONS

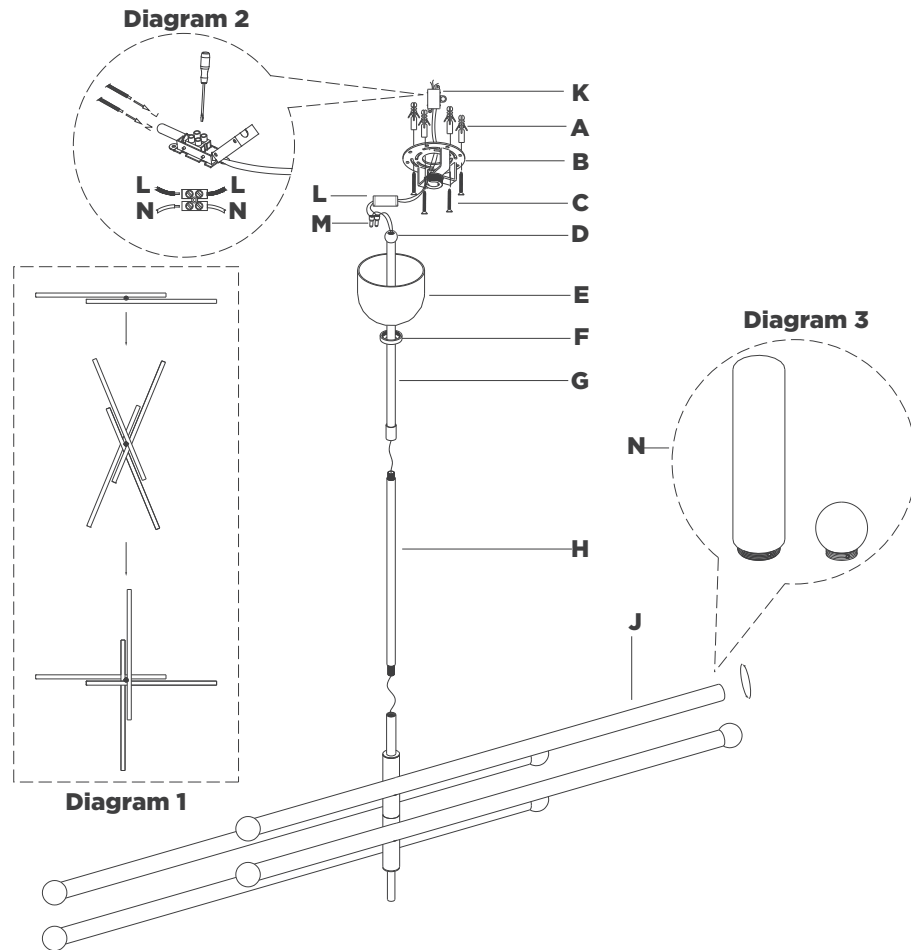

Rousseau Grande Eight Light Articulating Chandelier Item # KW5589-EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Strippers
Wire Cutters	Hammer	Pencil
Hammer		

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Rotate fixture arms into position as shown in diagram 1.
3. Remove canopy (E) from mounting plate (B) by removing collar ring (F).
4. Using mounting plate (B) as a guide, line up with the ceiling and mark anchor positions.
5. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors (A) into the holes using a hammer.
6. Install mounting plate (B) to ceiling and secure with wood screws (C) to anchors (A).
7. Feed electrical wires through bottom rod (H) and connect to fixture (J).
8. Continue feeding wires through collar ring (F), canopy (E), and top rod (G).
9. Holding fixture upright, slide collar ring (F) and canopy (E) down and rest on fixture (J). Then connect top rod (G) to bottom rod (H).

NOTE: Slide components down slowly to avoid damage.

ASSEMBLY INSTRUCTIONS

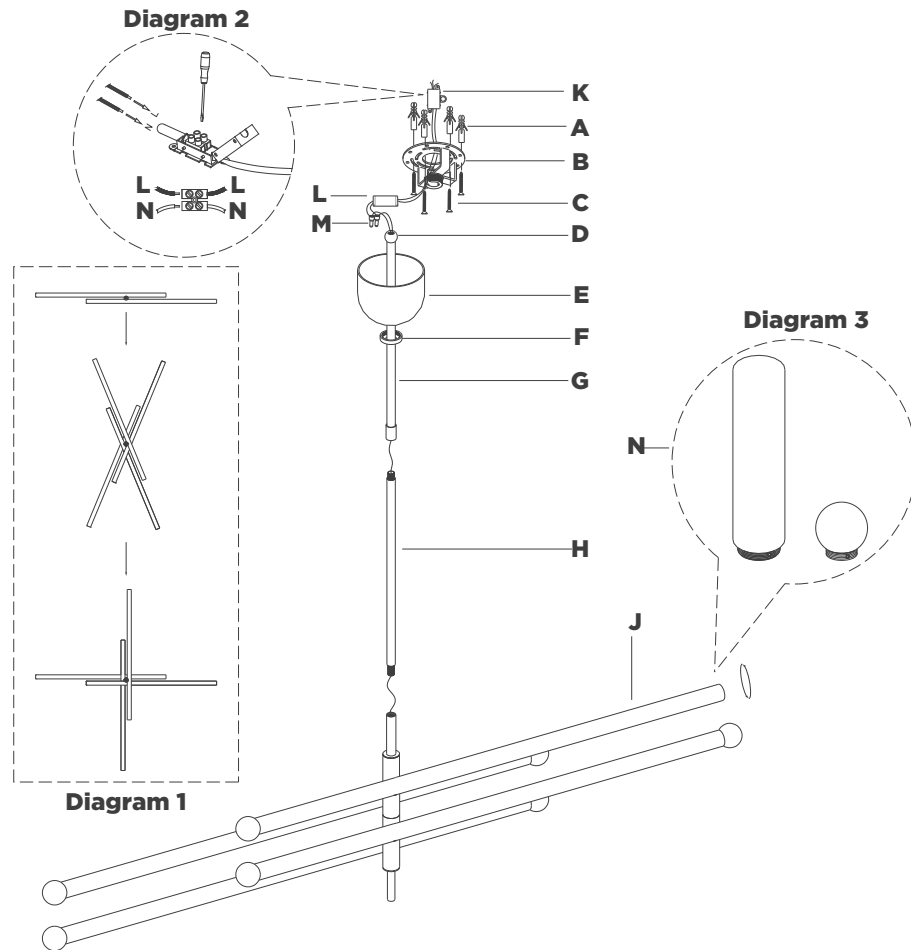

Rousseau Grande Eight Light Articulating Chandelier Item # KW5589-EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

10. Hang fixture swivel ball (D) to the center of mounting plate (B).
 11. Cut excess wires, being sure to leave enough to connect driver (L). Separate wires, and strip insulation on each 6 mm.
 12. Connect fixture neutral wire (black) to driver (L) output wire (black) using wire nut (M).
 13. Connect fixture hot wire (red) to driver (L) output wire (red) using wire nut (M).
- CAUTION:** Do not reverse the hot and neutral connections.
14. Open terminal block (K) to prepare for installation of electrical wires. Use diagram 2 to reference electrical installation steps below.
 15. Connect driver (L) neutral wires (blue) to terminal block (K) and secure with screws.
 16. Connect driver (L) hot wires (brown) to terminal block (K) and secure with screws. Close terminal block (K).
- CAUTION:** Do not reverse the hot and neutral connections.
17. Insert driver (L) into center of mounting plate (B).
 18. Install canopy (E) to mounting plate (B) and secure with collar ring (F).
 19. Thread shades (N) to fixture body (J) (see diagram 3).
- NOTE:** Do not overtighten otherwise shade could become damaged.

CAUTION: The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.