


ASSEMBLY INSTRUCTIONS

18" Cabinet Makers Picture Light


Item # SL2705-EU

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

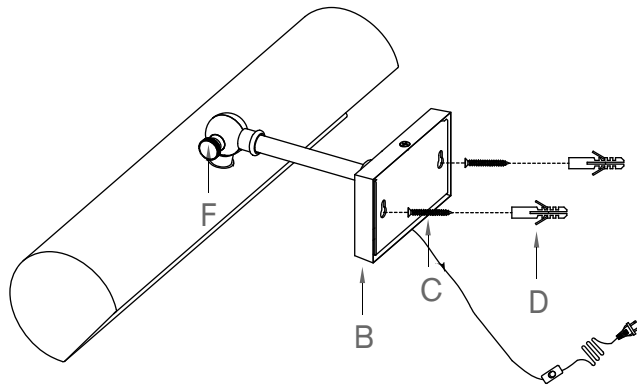

PORTABLE MOUNTING
(Fig. 1)

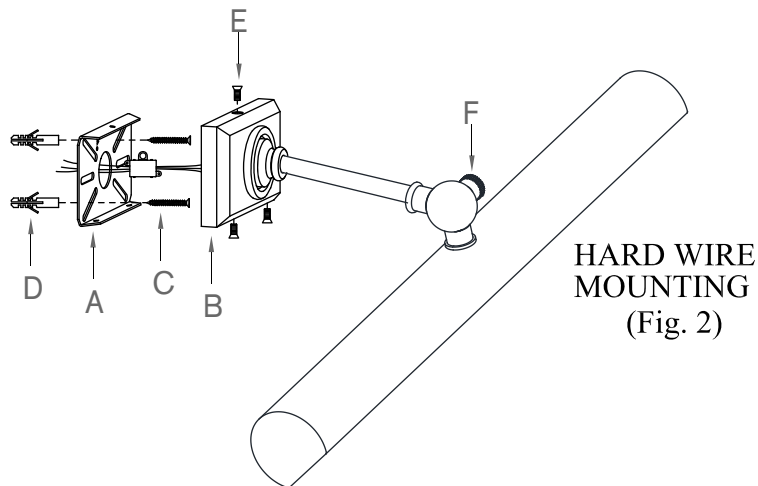

HARD WIRE MOUNTING
(Fig. 2)

*** (PORTABLE ASSEMBLY) *** (See Fig. 1)

1. Carefully remove all parts from the carton.
2. Measure center points between both mounting holes at back of fixture base (B). Mark two points with the same distance on the wall, make sure they are horizontal with each other.
3. Drill small holes at both points, hole should be big enough to accommodate with plastic anchors (D). Install plastic anchors (D) into the holes in the wall.
4. Insert mounting screws (C) into plastic anchors (D), make sure screwhead with 1/8" threads are visible.
5. Hook fixture base (B) onto both screws (C).
6. Insert the specified light bulb into lampholder.
7. Plug lamp into wall outlet.
8. Restore power and test fixture. Installation is completed.

*** (HARD WIRE INSTALLATION) *** (See Fig. 2)

1. SWITCH OFF THE MAIN ELECTRICAL SUPPLY AT THE BREAKER.
2. Place whole fixture on the wall outlet, use it as a template, mark the outer line of fixture base (B). Remove the whole fixture.
3. Remove mounting plate (A) from fixture base (B) by remove mounting screws (E) with plastic anchors (D). Install plastic anchors (D) into the holes in the wall.
4. Place mounting plate (A) on the marked section on the wall, mark center location for both mounting slots on the mounting plate (A). Remove mounting plate (A).
5. Drill small holes on the marked location, the holes should be big enough to accommodate with plastic anchors (D). Push plastic anchors (D) into the holes.
6. Gently pull the wires from the wall outlet and allow the wires to hang. Thread the wires through the center hole in mounting plate (A).
7. Affix mounting plate (A) to the wall outlet by aligning mounting holes with center holes of plastic anchors (D), inserting mounting screws (C) to secure mounting plate (A) to the wall.
8. Connect ground (usually green) outlet wire to ground (green) side of terminal block by loosening loosening set screw, inserting outlet wire and tightening set screw. The terminal block is attached at backside of fixture base (B).
9. Connect neutral (usually blue) outlet wire to neutral (blue) side of terminal block by loosening set screw, inserting outlet wire and tightening set screw. The terminal block is attached at backside of fixture base (B).
10. Repeat procedure for the hot (brown) outlet wire to hot side of terminal block. Always make sure that no wire strands are left outside the terminal block. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
11. Close the cap of terminal block.
12. Attach fixture base (B) to affixed mounting plate (A) by aligning the holes and inserting base screw (E).
13. Insert the specified light bulb into lampholder.

ADJUSTMENT INSTRUCTION.

1. Loosen adjustment key (F).
2. Adjust lamp shade to desired position and tighten the adjustment key (F).

*** Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.