
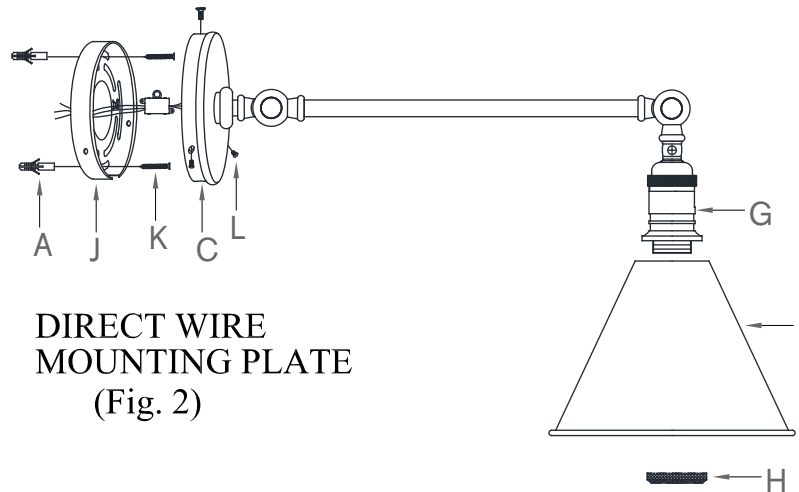


ASSEMBLY INSTRUCTIONS

CORD COVER MOUNTING OPTION

(Fig. 1)

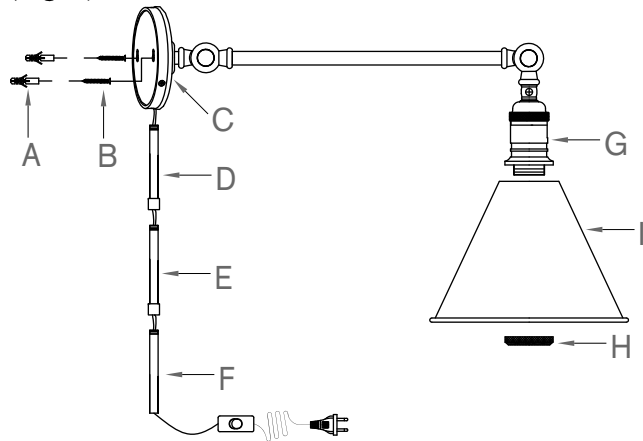

**DIRECT WIRE
MOUNTING PLATE**
(Fig. 2)

Boston Functional Single Library Light Item # SL 2922-EU

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

*** (CORD COVER ASSEMBLY) *** (See Fig. 1)

1. Carefully remove all parts from the carton.
2. Screw threaded nipple of cord cover (D) into bottom threaded opening of backplate (C). Thread cord cover (E) into cord cover (D), thread cord cover (F) to cord cover (E) and hand tighten.
3. Measure center points between both mounting holes at back of fixture base (C). Mark two points with same distance on the wall, make sure they are vertical with each other.
4. Drill small holes at both points, hole should be big enough to accommodate with plastic anchors (A). Install plastic anchors (A) into the holes in the wall.
5. Insert mounting screws (B) into plastic anchors (A), make sure screwhead 1/8" threads are visible.
6. Hook fixture base (C) onto both screws (B).
7. Remove threaded ring (H) from lampholder (G), Place lamp shade (I) onto the top of lampholder (G) and tighten with threaded ring (H).
8. Insert light bulb into lampholder (G).
9. Plug lamp into wall outlet.

*** (DIRECT WIRE INSTALLATION) *** (See Fig. 2)

We strongly recommend that a professional electrician install the fixture.

1. Remove mounting plate (I) from fixture base (C) by remove base screws (J)
2. Place mounting plate (J) to wall outlet box, use it as a template, mark two points on the wall for mounting plate (J). Remove mounting plate (J).
3. Drill small holes at both points, hole should be big enough to accommodate with plastic anchors (A). Install plastic anchors (A) into the holes in the wall.
4. Attach mounting plate (J) to the wall outlet box, inserting screws (K) into plastic anchors (A) to secure mounting plate (J) on the wall.
5. Connect ground (usually green) outlet wire to ground (green) side of terminal block by loosening set screw, inserting outlet wire and tightening set screw. The terminal block is attached at backside of fixture base (C).
6. Connect neutral (usually blue) outlet wire to neutral (blue) side of terminal block by loosening set screw, inserting outlet wire and tightening set screw. The terminal block is attached at backside of fixture base (C).
7. Repeat procedure for the hot (brown) outlet wire to hot side of terminal block. Always make sure that no wire strands are left outside the terminal block. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
8. Close the cap of terminal block.
9. Attach fixture base (C) to affixed mounting plate (J) and secure with base screws (L).
10. Follow steps 7, & 8 of CORD COVER ASSEMBLY.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.