

ASSEMBLY INSTRUCTIONS


Bryant Sconce
Item # TOB 2002-EU

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

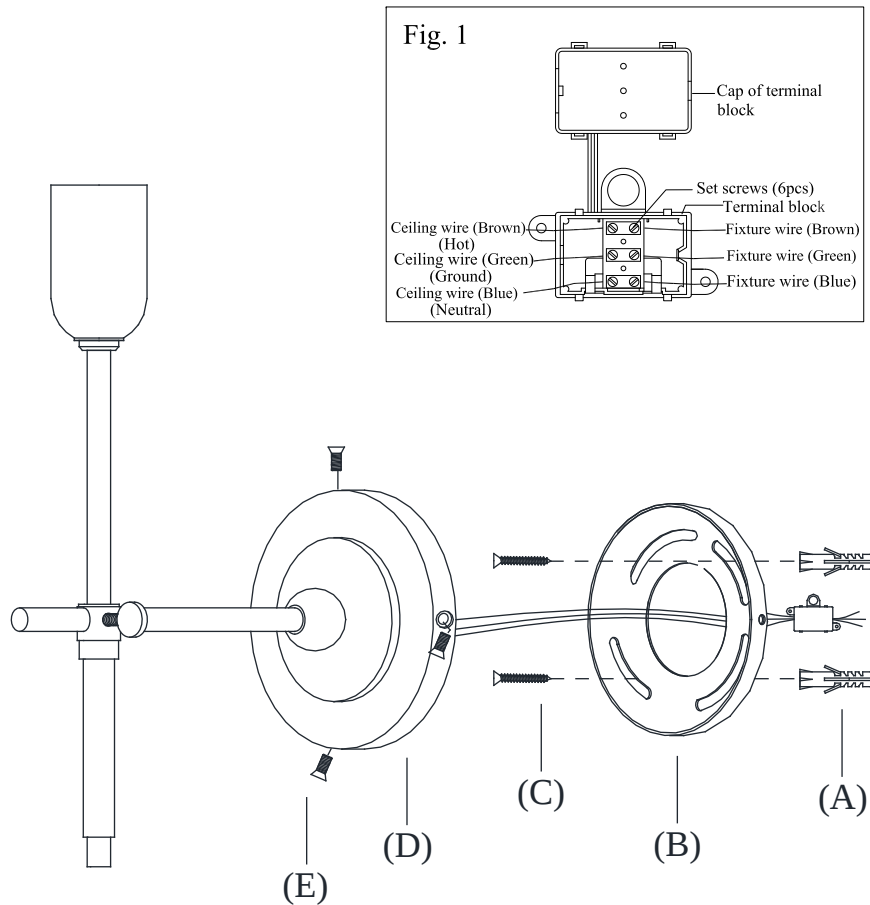

- Carefully remove all parts from the carton.
- Remove mounting plate (B) from base of light fixture (D) by removing base screws (E) in counter-clockwise direction.
- Place mounting plate (B) on the wall, use it as a template, mark center points for both mounting slots for mounting plate on the wall. Remove mounting plate (B).
- Drill small holes on the marked location, the holes should be big enough to accommodate with plastic anchors (A). Push plastic anchors (A) into the holes.
- Affix mounting plate (B) to wall outlet box, insert mounting screws (C) to plastic anchors (A) to secure mounting (B) to the wall.
- Connect ground (usually green) outlet wire to ground (green) side of terminal block by loosening set screw, inserting outlet wire and tightening set screw. The terminal block is attached at backside of fixture base (D).
- Connect neutral (usually blue) outlet wire to neutral (blue) side of terminal block by loosening set screw, inserting outlet wire and tightening set screw. The terminal block is attached at backside of fixture base (D).
- Repeat the procedure with the hot (brown) outlet wire to hot side of terminal block. Always make sure that no wire strands are left outside the terminal block. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
- Attach fixture base (D) to the affixed mounting plate (B) and tighten with base screws (E).
- Insert the specified light bulb into lampholder.
- Clip shade (packed separately) onto the light bulb.
- Restore power and test fixture. Installation is completed.

CAUTION:

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

DISPOSAL:

Do not dispose of electrical appliances as unsorted municipal waste, use separate collection facilities. Contact your local government for information regarding the collection systems available. If electrical appliances are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being.

*** Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

ASSEMBLY INSTRUCTIONS

Bryant Sconce
Item #TOB 2002-EU

注意事项:

1. 我们建议必须由专业的电工安装。
2. 维护, 安装, 更换光源之前, 请务必切断电源。
3. 凡是采用外部连接到输入或输出电路和软缆或软线, 如果此灯具的外部软缆或软线损坏了, 该线要由制造厂或其服务代理商或一个具有专业资格的人来更换, 以免发生意外。
4. 产品一经安装恕不退还。

安装说明:

1. 小心地将所有配件从箱子里取出。
2. 松开螺丝 (E) 将底盖 (B) 从底座 (D) 处取下。
3. 将底盖 (B) 放在墙壁线盒处, 对着底盖的槽位在线盒处描2个点。
4. 在墙描点的位置打2个孔, 孔的大小需与胶塞 (A) 合适, 然后把胶塞打入孔里。
5. 将底盖 (B) 置放到线盒处, 将螺丝(C)锁入胶塞(A)上将底盖 (B) 固定到墙上。
6. 将电源线的棕色电线(火线), 蓝线 (零线), 绿色 (地线) 分别插入接线盒对应的位置并用固定螺丝固定, 再合上线盒盖。(见F1.)
7. 将底座 (D) 扣紧到底盖 (B) 上, 对准两者的孔位并用螺丝 (E) 锁紧。
8. 装上灯泡。
9. 组装完成, 打开电源测试灯具。

保养说明:

1. 请用干净柔软的布擦拭灯具。请勿使用化学药剂以免损坏灯身颜色。

