


## ASSEMBLY INSTRUCTIONS

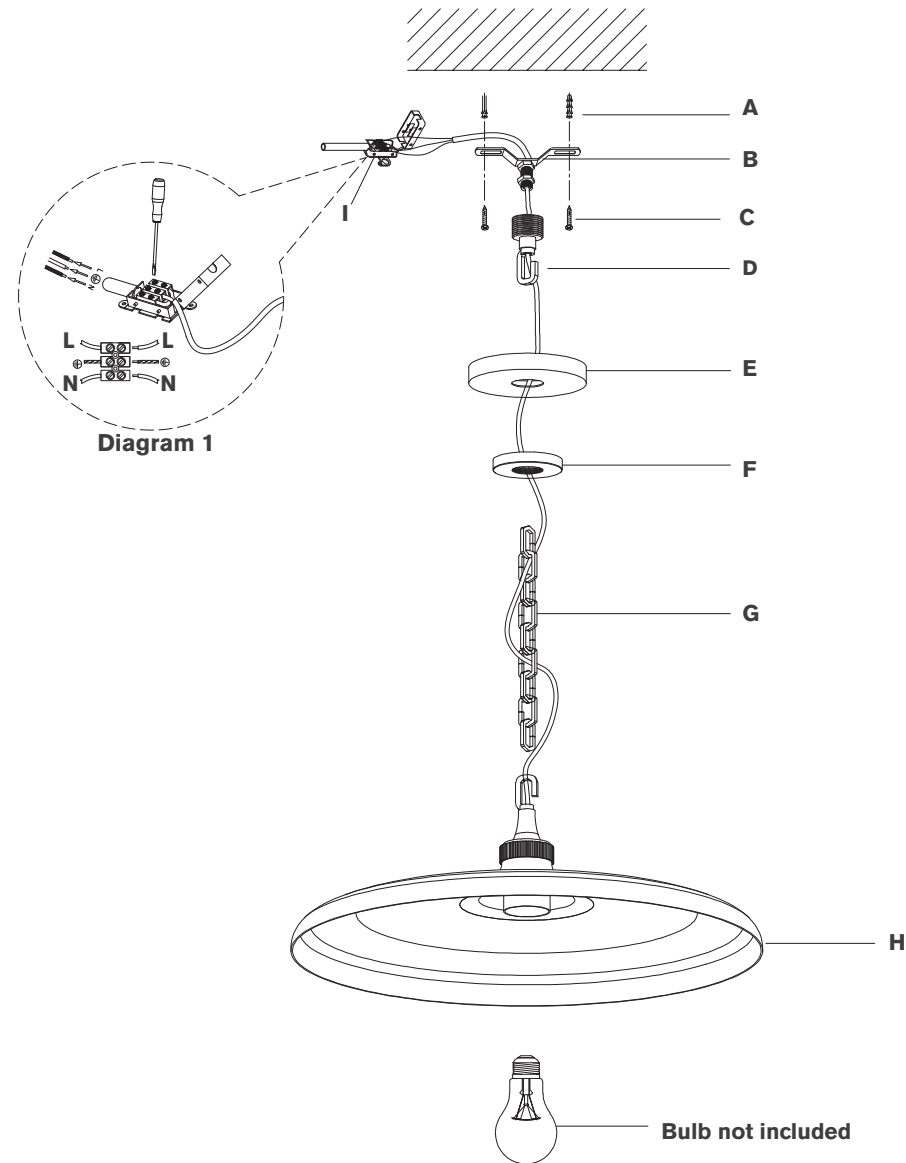

### Piatto Medium Pendant

Item # TOB 5115EU

#### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


#### TOOLS REQUIRED (NOT INCLUDED):

|                      |                     |                |
|----------------------|---------------------|----------------|
| Phillips Screwdriver | Slotted Screwdriver | Chain Pliers   |
| Slip Joint Pliers    | Wire Strippers      | Measuring Tape |
| Wire Cutters         | Pencil              | Drill          |
| Hammer               |                     |                |

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove canopy (E) from collar loop (D) by removing collar ring (F).
3. Using the mounting plate (B) as a guide, line up with the ceiling and mark anchor positions.
4. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors (A) into the holes using hammer.
5. Line up mounting plate (B) to anchors and secure with screws (C).
6. Secure collar loop (D) to mounting plate (B) using pliers to tighten locknut.
7. Install canopy (E) to collar loop (D) and secure with collar ring (F).
8. Determine desired overall length, and amount of chain (G) needed. Shorten chain using chain pliers. (Keep extra chain)
9. Attach chain (G) to collar loop (D) and to fixture body (H).
10. Thread fixture wire and ground wire through chain (G).

**NOTE:** When you reach the collar loop (D), ensure there is no tension on the wires. Cut excess wires, being sure to leave enough length to connect terminal block (I).

## ASSEMBLY INSTRUCTIONS

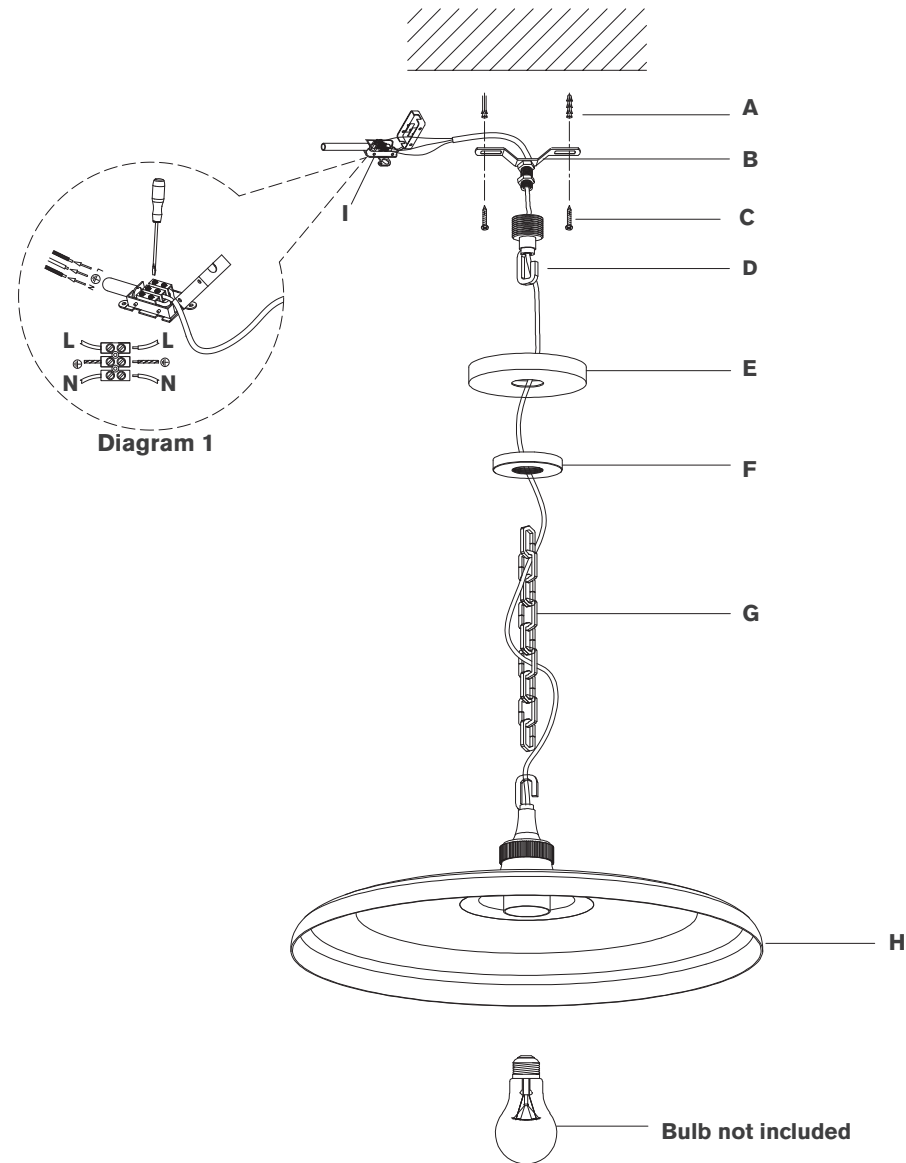

### Piatto Medium Pendant

Item # TOB 5115EU

#### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

11. Remove outer housing of wire by making a neat cut all the way around, about 2.5 cm from the end. Once cut is made, remove and discard the piece of housing, exposing the electrical wires.

**NOTE:** Make sure not to cut too deep into housing or electrical wires could become damaged.

12. Separate wires, and strip insulation on each 6 mm.
13. Loosen collar ring (**F**) and let canopy (**E**) slip down chain (**G**) carefully.
14. Twist all fixture wires together. Slip through center hole of collar loop (**D**).

**NOTE:** Untwist wires and separate to prepare for connection.

15. Open terminal block (**I**) to prepare for installation of electrical wires. Use diagram 1 to reference electrical installation steps below.

16. Connect fixture ground (green) and supply ground (usually green or yellow) to terminal block (**I**) and secure with screws.

**NOTE:** It is imperative that the fixture is grounded.

17. Connect neutral wires (blue) to terminal block (**I**) and secure with screws.

18. Connect hot wires (brown) to terminal block (**I**) and secure with screws. Close terminal block (**I**).

**CAUTION:** Do not reverse the hot and neutral connections.

19. Install canopy (**E**) to collar loop (**D**) by securing with collar ring (**F**).
20. Install light bulb into the socket.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.