

S E R A X


Paul Stefan Gross

N O M A D


P E N D A N T L A M P S

MOUNTING INSTRUCTION MANUAL

B7225103-100

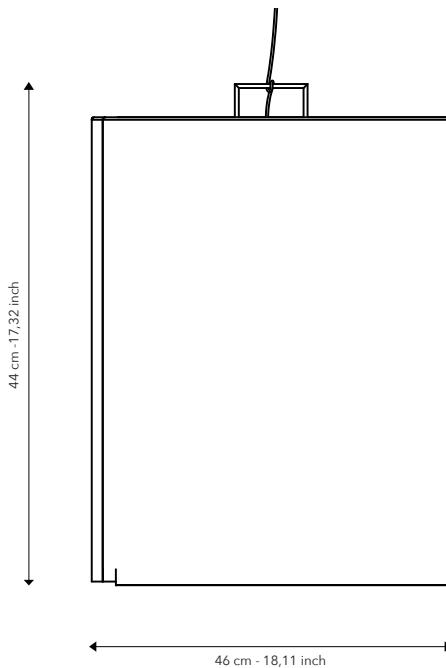


SUPPLIED: ✓

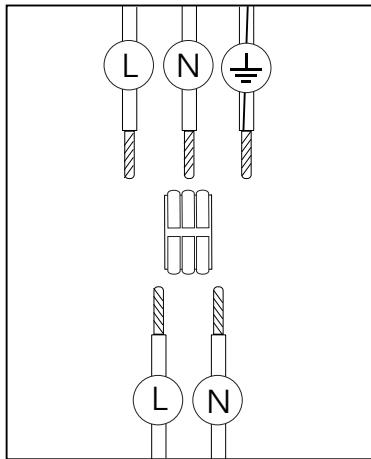

1.



Connect the wires as illustrated.

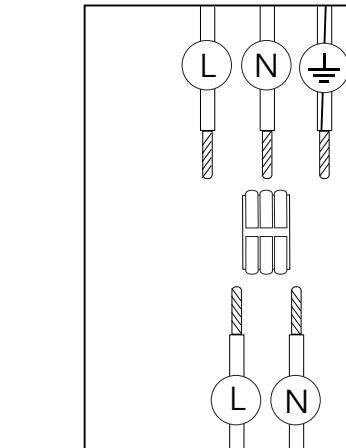

2.

Wrap the cable one or two times around the top rod.

Next, you can hang up the lamp.

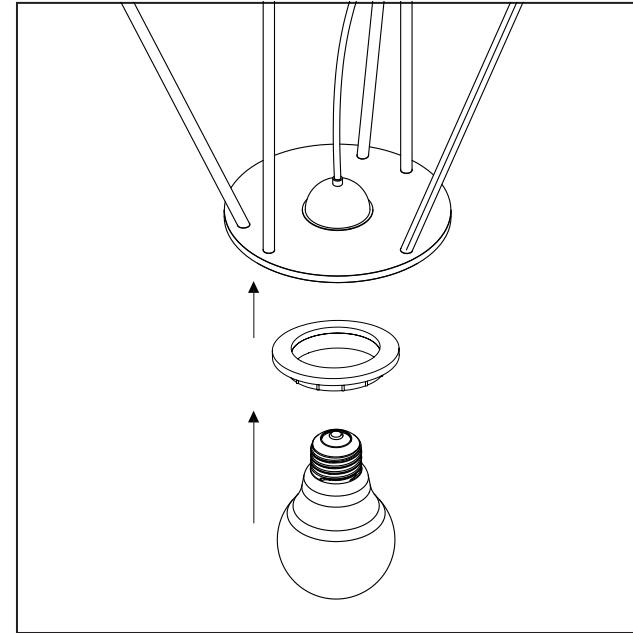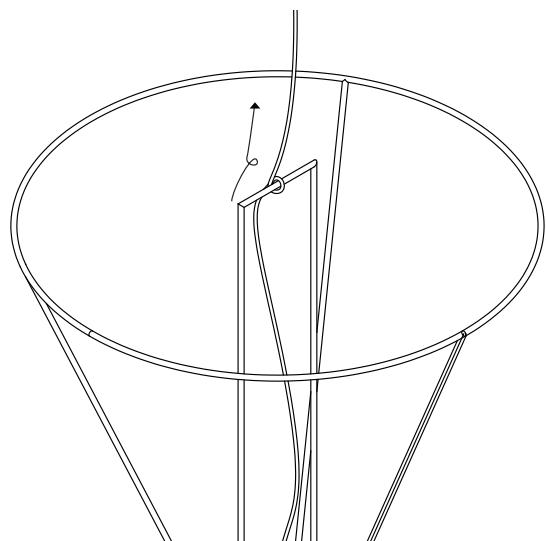

3.


Fit the cable through the provided hole in the frame.

Secure it by screwing on the socket ring.

Next, insert the lightbulb.

4.

Hang the fabric pieces over the frame according to your preference.

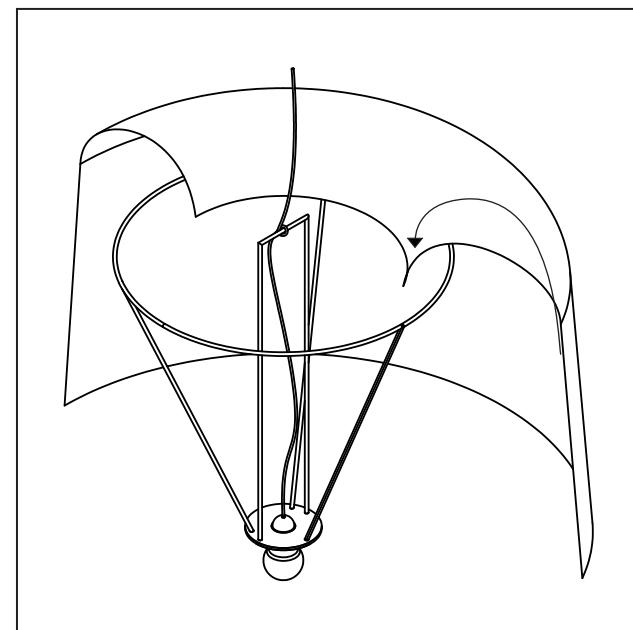

LUMINARY SPECS – FABRIC SPECS & WASHING INSTRUCTIONS	
LIGHTING	
TYPE	Pendant Lamp S
COLOR	Black - Beige
MATERIAL	Metal
DIMENSIONS	L46 W46 H44 cm L18,11 W18,11 H17,32 inch
SWITCH	No
DIMMABLE	No
CABLE LENGTH	2 m
BULB TYPE	E27
LIGHTBULB INCLUDED	No
MAXIMUM VOLTAGE	240 Volt
MAXIMUM WATTAGE	5 W
CLASS	I
ENVIRONMENT	IP20
FABRIC	
MATERIAL	25% linen – 25% rayon – 10% poly – 40% cotton
WASHING INSTRUCTIONS	 Cold handwash Iron at medium temperature

SAFETY DIRECTIONS						
<p>Please study the instruction manual and below information carefully before installing or using this product and keep this user manual for further reference.</p> <ol style="list-style-type: none"> 1. The luminaires may only be installed by authorized and qualified technicians according the valid regulations for electrical installation. 2. Maintenance of the luminaires is limited to their surfaces. During maintenance no moisture can come into contact with any areas of the terminal connections or voltage control parts. 3. The electrical supply must be switched off at the outset, preferably by means of a switch in the distribution box, before any installation, maintenance or repair work is undertaken. 4. Exterior light must not be installed during rain. 5. Take account of the minimal separation distance from other objects and the room required around the fitting. 6. If in any doubt, consult a professional, taking local installation requirements into account. Some countries stipulate that lighting may be installed only by registered installers. 7. Clamping screws in electrical connections must be adequately tightened. This is particularly the case with 12V low voltage conductors. 8. When replacing a halogen lamp, wait for it to cool, for a minimum of 5 minutes. 9. Clean with a clean, dry cloth or brush, use no solvents or abrasives. Avoid dampness on all electrical components. 10. Take account of all available technical information. 11. Take note of the symbols when connecting wires: <table> <tr> <td></td> <td>= Neutral</td> </tr> <tr> <td></td> <td>= Live</td> </tr> <tr> <td></td> <td>= Earth</td> </tr> </table> 12. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard. 		= Neutral		= Live		= Earth
	= Neutral					
	= Live					
	= Earth					

SYMBOLS & MEANINGS



For indoor use only, where direct contact with water is impossible.



Protection class 1: the fitting must be earthed.



Protection class 2: the fitting is double insulated and does not require earthing.



Protection class 3: the fitting is low voltage.



Observe the indicated minimum distance between the lamp and the illuminated materials/objects.



Only the self-screening halogen illuminants should be used with the luminaire.



Strip the wire to the indicated length.



Connect using the specified cable.



The fixture can be used in combination with a dimmer. Consult the sales outlet for the correct type of dimmer (important in the case of 12V fittings)



The maximum wattage indicated in each lighting unit, for example, must not be exceeded.



This luminaire cannot be disposed together with normal domestic waste, you have to bring it to a staging area for electrical waste.



This luminaire was designed to work only with the indicated voltage.



This shows that the products meets EU safety, health or environmental requirements.

SYMBOLS FOR THIS PRODUCT:



SERAX

VELDKANT 21, 2550 KONTICH, BELGIUM

SERAX.COM +32 3458 05 82