

THE LED 28, 40, 60 IS DESIGNED TO COMPLIMENT AND ENHANCE THE MOST INNOVATIVE VISIONS OF ARCHITECTS AND INTERIOR DESIGNERS.

THE IDEA IS TO PROVIDE THE ULTIMATE VERSATILITY FOR DIFFERENT PURPOSES AND INTERIOR TYPES VIA A MINIMALISTIC, CUBICAL DESIGN LANGUAGE.



Led_{28, 40, 60}

TUNTO

Collection





Led₂₈

TUNTO

LED₂₈ FIX

1200 mm 26 W



1000 mm 22 W



Direct 

Drivers / External

DALI, PUSH DIM	LCM40DA
CASAMBI DIM	LCM40BLE

The Led28 lights give an ideal, minimalistic yet powerful impression when installed in groups of two or more, either on walls or ceilings.

The lights are highly modular, available with various options of wood, length, and methods of installation, opening up endless possibilities for creative use.

The FIX model gives a forward light, and can be easily and subtly attached to a wall or ceiling.

Collection

The PENDANT model is ideal for lighting various kinds of workspaces, from offices to shop interiors. A pair of Led28s can also be attached to each other for a straight and detailed appearance.

The pendant model is equipped with thin steel wires and a transparent power cable.

LED₂₈ PENDANT

1200 mm 26 W



1000 mm 22 W





Direct 

Drivers / Power Box

DALI, PUSH DIM	LCM40DA
CASAMBI DIM	LCM40BLE


Led₂₈



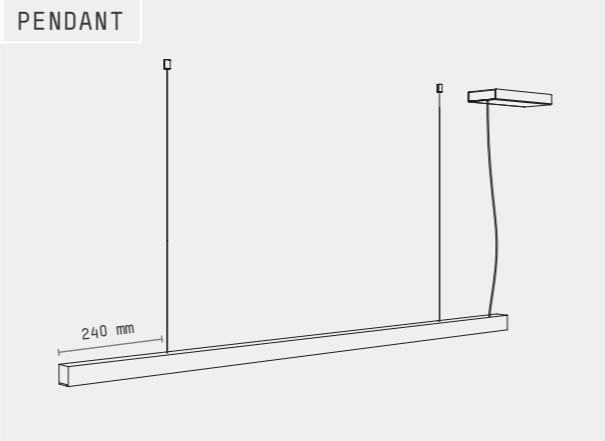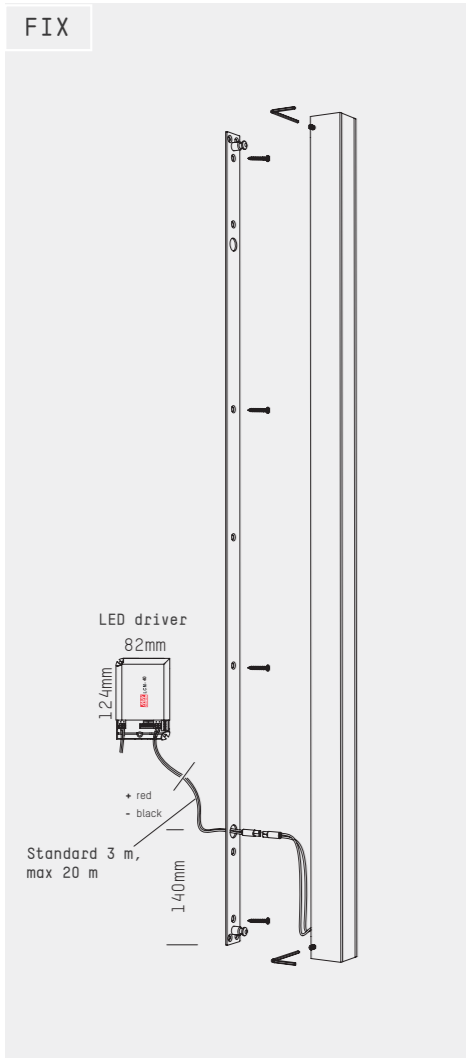


Led28 FIX models assembly
 Attach the steel holder to the wall or ceiling. Connect the power source cables to the light's connectors. Place and level the light on the steel holder and tighten screws.

TECHNICAL SPECIFICATIONS

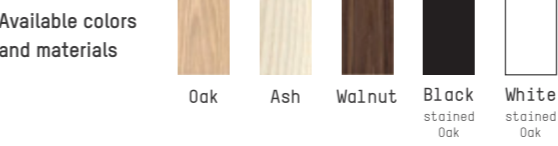


Surface Finish Ash: White Oil wax / Oak, Walnut: Oil wax
 Black and White, Lacquer

Led₂₈ 1200 pendant lx

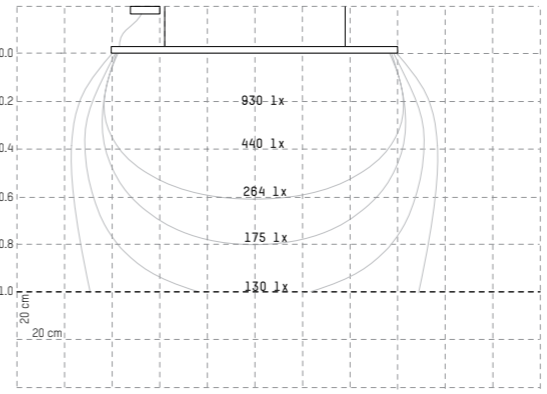

Led₂₈ 1200 pendant lx / measured 1.0 m on the table

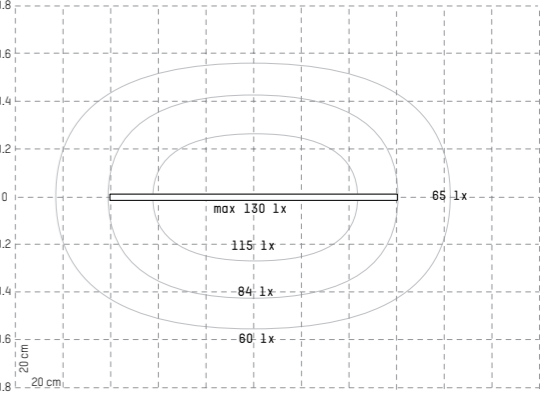

Drivers / Power Box

700 mA	DALI, PUSH DIM	LCM40DA
	CASAMBI DIM	LCM40BLE

Rated Power	22-26 W	Kelvin	2700 K, 3000 K, 4000 K
Voltage	180-295V 50/60 Hz,	Lumen	1000 lm / 1100 lm 1200 lm / 1300 lm
Output	25-32V 700 mA	CRI	93
Cord Length	Pendant, standard 2 m, transparent. FIX, standard 3 m, Max 20 m.	Package Size	130 x 110 x 1060-1260 mm
Power Box	White ceiling cup 220 x 100 x 35 mm RAL 9003 fine efekt	Package Weight	2-2,3 kg

INDOOR USE ONLY NON-USER REPLACEABLE LIGHT SOURCE IP20 CE

Led₂₈