

# Ago Bollard H600 1L

LL1263003

**Lombardo.**



## Technical information:

|                                    |                         |
|------------------------------------|-------------------------|
| Installation:                      | Ground, Post ground     |
| Material:                          | Aluminium               |
| Finish:                            | Grey Anodized Aluminium |
| Treatment:                         | Anodization             |
| Diffuser type:                     | Polycarbonate           |
| Lamp type:                         | LED                     |
| Energy performance class:          | F                       |
| Colour temperature:                | 3000K                   |
| CRI:                               | >80                     |
| LB Factor:                         | L80B50 - 50.000h        |
| Photobiological risk:              | RG1                     |
| Power consumption (Watt):          | 10                      |
| Lumen:                             | 1100                    |
| Real Lumen:                        | 270                     |
| Power supply:                      | ✓ integrated            |
| LED:                               | AC DIRECT               |
| Insulation class:                  | ⊕ CL.I                  |
| Type of protection:                | <b>IP 66</b>            |
| Resistance to breakage:            | <b>IK 07 2J xx5</b>     |
| Standards and Marks of Conformity: | CE UK CA                |
| Dimming                            | Phase cut               |




# Ago Bollard H600 1L

LL1263003

**Lombardo.**



## Installation images:

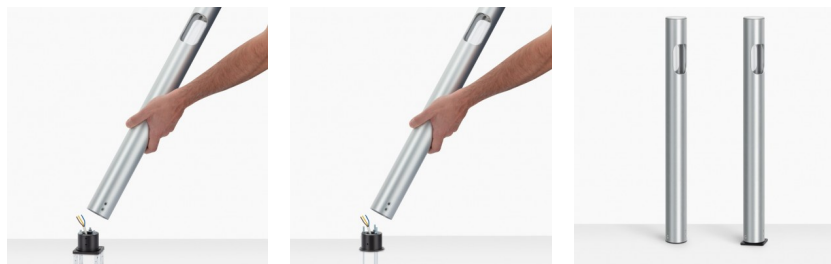

# Ago Bollard H600 1L

LL1263003

**Lombardo.**

## Lighting simulation:



ago\_bollard\_600\_1l

## Photometric curves:



**Lombardo S.r.l.**

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E [info@lombardo.it](mailto:info@lombardo.it)

**lombardo.it**