

# Ago Bollard H900 1L

LL1263101

**Lombardo.**



## Technical information:

|                                    |                          |
|------------------------------------|--------------------------|
| Installation:                      | Ground, Post ground      |
| Material:                          | Aluminium                |
| Finish:                            | Black Anodized Aluminium |
| Treatment:                         | Anodization              |
| Diffuser type:                     | Polycarbonate            |
| Lamp type:                         | LED                      |
| Energy performance class:          | F                        |
| Colour temperature:                | 2200K                    |
| CRI:                               | >80                      |
| LB Factor:                         | L80B50 - 50.000h         |
| Photobiological risk:              | RG1                      |
| Power consumption (Watt):          | 10                       |
| Lumen:                             | 1100                     |
| Real Lumen:                        | 270                      |
| Power supply:                      | ✓ integrated             |
| LED:                               | AC DIRECT                |
| Insulation class:                  | ⊕ CL.I                   |
| Type of protection:                | <b>IP 66</b>             |
| Resistance to breakage:            | <b>IK 07 2J xx5</b>      |
| Standards and Marks of Conformity: | CE UK CA                 |
| Dimming                            | Phase cut                |



# Ago Bollard H900 1L

LL1263101

**Lombardo.**



## Installation images:



**Lombardo S.r.l.**

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E [info@lombardo.it](mailto:info@lombardo.it)


**lombardo.it**

# Ago Bollard H900 1L

LL1263101

**Lombardo.**

## Lighting simulation:

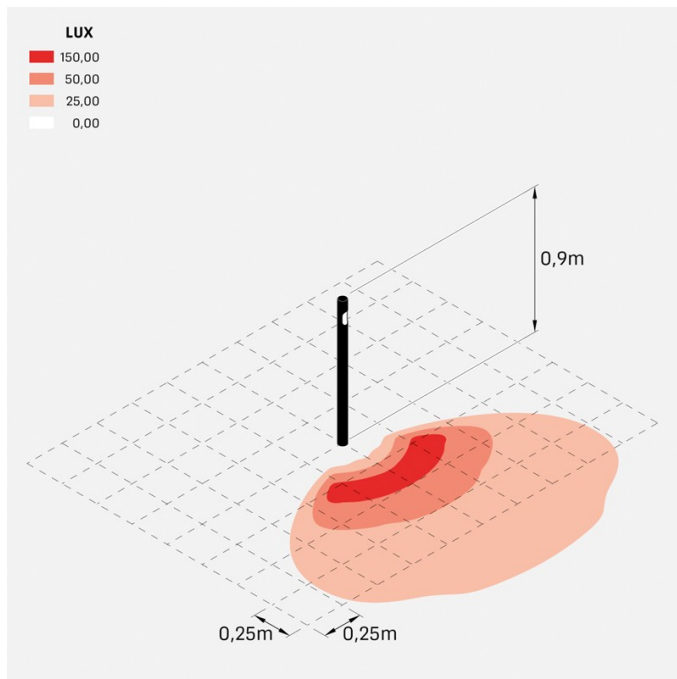

ago\_bollard\_900\_1l