


# Ago Bollard H300 1L


LL1263191

**Lombardo.**



## Technical information:


Installation:	Ground, Post ground
Material:	Aluminium
Finish:	Black Anodized Aluminium
Treatment:	Anodization
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	2200K
CRI:	>80
LB Factor:	L80B50 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	10
Lumen:	1100
Real Lumen:	270
Power supply:	☑ integrated
LED:	AC DIRECT
Insulation class:	⊖ CL.I
Type of protection:	<b>IP 66</b>
Resistance to breakage:	<b>IK 07 2J xx5</b>
Standards and Marks of Conformity:	CE UK CA
Dimming	Phase cut



# Ago Bollard H300 1L

Lombardo.

LL1263191

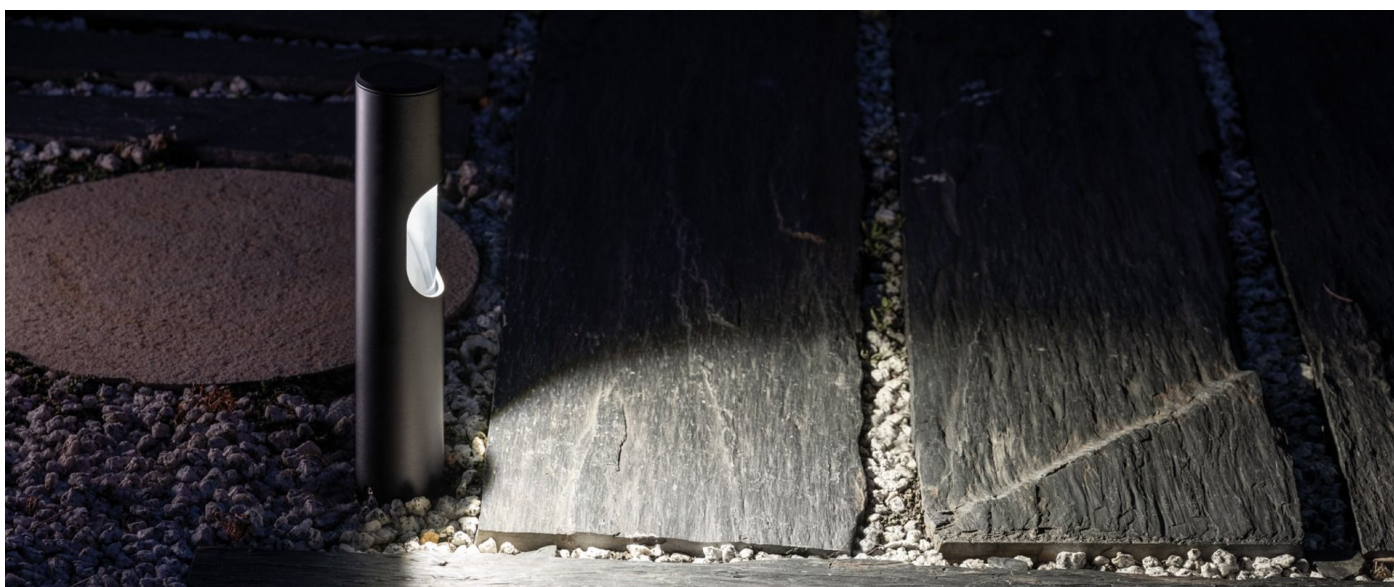

## Installation images:




# Ago Bollard H300 1L

LL1263191

Lombardo.

## Lighting simulation:

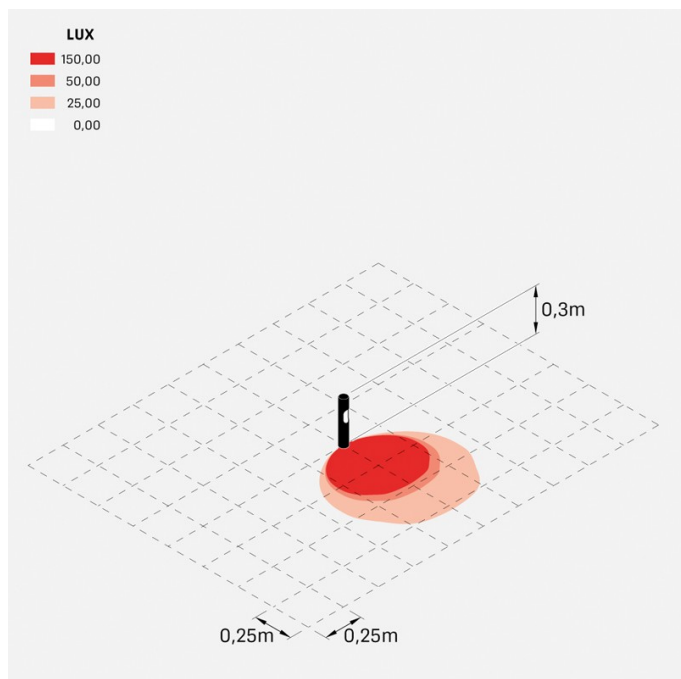

ago\_bollard\_300\_1l