


# Kit Clic Post 40 H1000

LL14805B2

**Lombardo.**

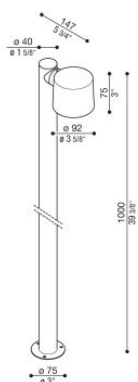

## Technical information:

Installation:	Ground
Material:	Polycarbonate
Finish:	Black RAL 9005
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B50 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	5
Lumen:	600
Real Lumen:	362
Power supply:	☑ integrated
LED:	AC DIRECT
Insulation class:	⊖ CL.I
Type of protection:	<b>IP 65</b>
Resistance to breakage:	<b>IK 06 1J xx3</b>
Standards and Marks of Conformity:	CE UK
Dimming	Phase cut

GU10 version: light bulb not included. Kit consisting of Clic Post, Forty Pole with top cap and Forty Post fixing base.

# Kit Clic Post 40 H1000

Lombardo.

LL14805B2




# Kit Clic Post 40 H1000

Lombardo.

LL14805B2

## Lighting simulation:

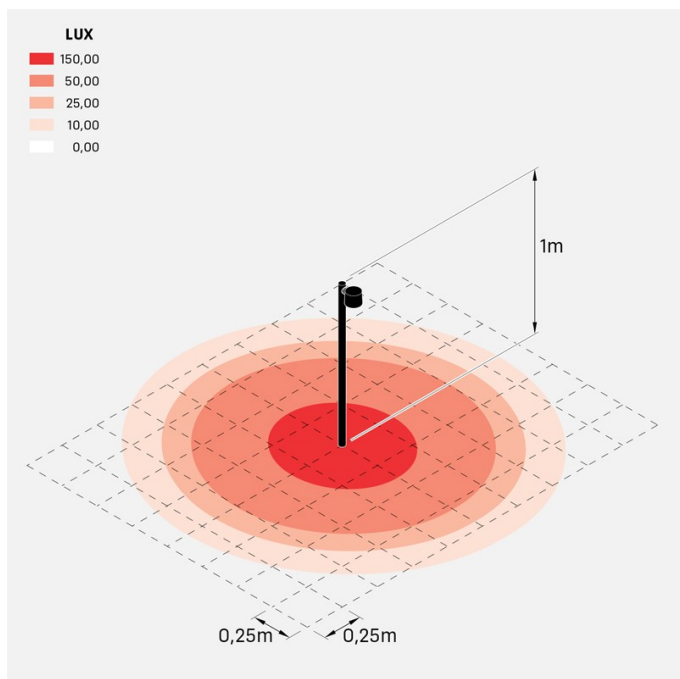

clic\_kit\_post40\_H1000

## Photometric curves:

