


# Clic Up Top

LL14811B2

**Lombardo.**



## Technical information:


Installation:	Ceiling
Material:	Polycarbonate
Finish:	Black RAL 9005
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B50 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	5
Lumen:	600
Real Lumen:	330
Power supply:	☑ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Type of protection:	<b>IP 65</b>
Resistance to breakage:	<b>IK 06 1J xx3</b>
Standards and Marks of Conformity:	CE UK
Dimming	Phase cut

GU10 version: light bulb not included.

# Clic Up Top

LL14811B2

Lombardo.

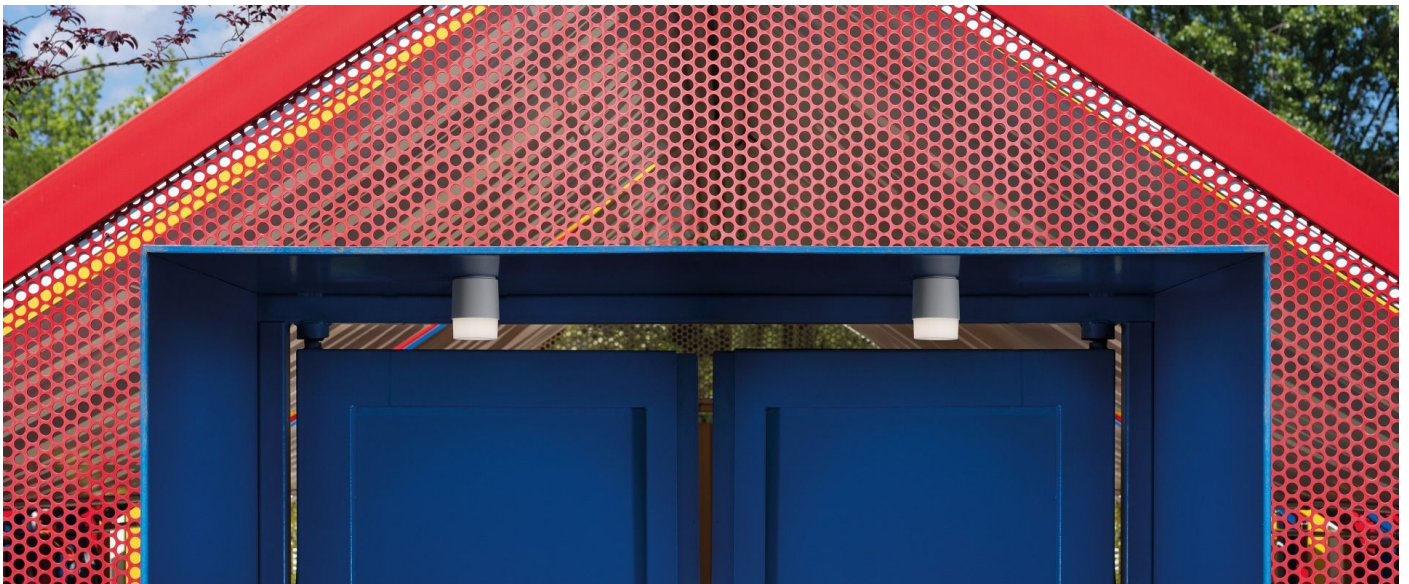


## Installation images:



LL14811B2

## Lighting simulation:

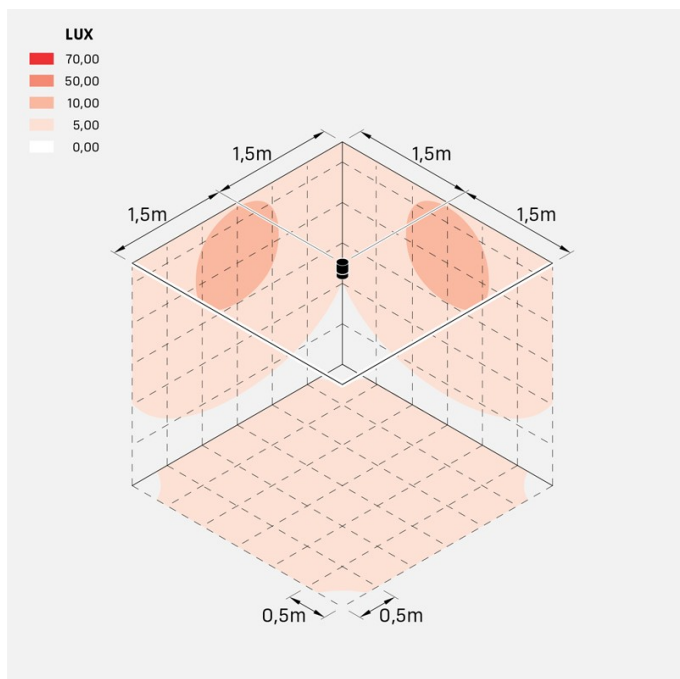

clic\_up\_top

## Photometric curves:

