

Kit Clic Up Post 40 H1000

LL14815D3

Lombardo.



Technical information:

Installation:	Ground
Material:	Polycarbonate
Finish:	Dark Grey RAL 7021
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B50 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	5
Lumen:	600
Real Lumen:	330
Power supply:	✓ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Type of protection:	IP 65
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK
Dimming	Phase cut

GU10 version: light bulb not included. Kit consisting of Clic Post, Forty Pole with top cap and Forty Post fixing base.

Kit Clic Up Post 40 H1000

Lombardo.

LL14815D3



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Kit Clic Up Post 40 H1000

Lombardo.

LL14815D3

Lighting simulation:

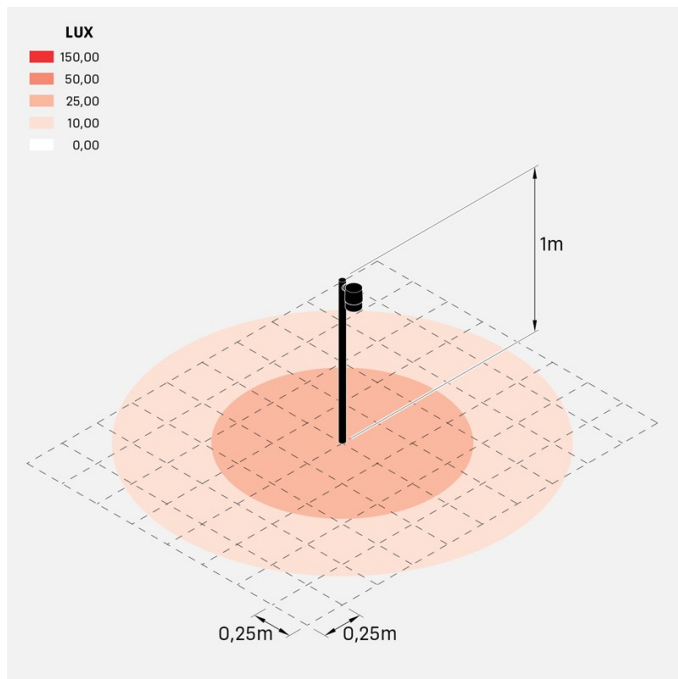

clic_up_kit_post40_H1000

Photometric curves:



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it