


Kit Clic Up Post 40 H1500

Lombardo.

LL14816B2

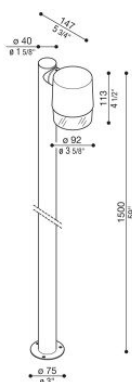

Technical information:


| | |
|------------------------------------|---------------------|
| Installation: | Ground |
| Material: | Polycarbonate |
| Finish: | Black RAL 9005 |
| Diffuser type: | Polycarbonate |
| Lamp type: | LED |
| Energy performance class: | F |
| Colour temperature: | 2700K |
| CRI: | >80 |
| LB Factor: | L80B50 - 50.000h |
| Photobiological risk: | RG0 |
| Power consumption (Watt): | 5 |
| Lumen: | 600 |
| Real Lumen: | 330 |
| Power supply: | ☑ integrated |
| LED: | AC DIRECT |
| Insulation class: | ⊖ CL.I |
| Type of protection: | IP 65 |
| Resistance to breakage: | IK 06 1J xx3 |
| Standards and Marks of Conformity: | CE UK EA |
| Dimming | Phase cut |

GU10 version: light bulb not included. Kit consisting of Clic Post, Forty Pole with top cap and Forty Post fixing base.

Kit Clic Up Post 40 H1500

LL14816B2

Lombardo.

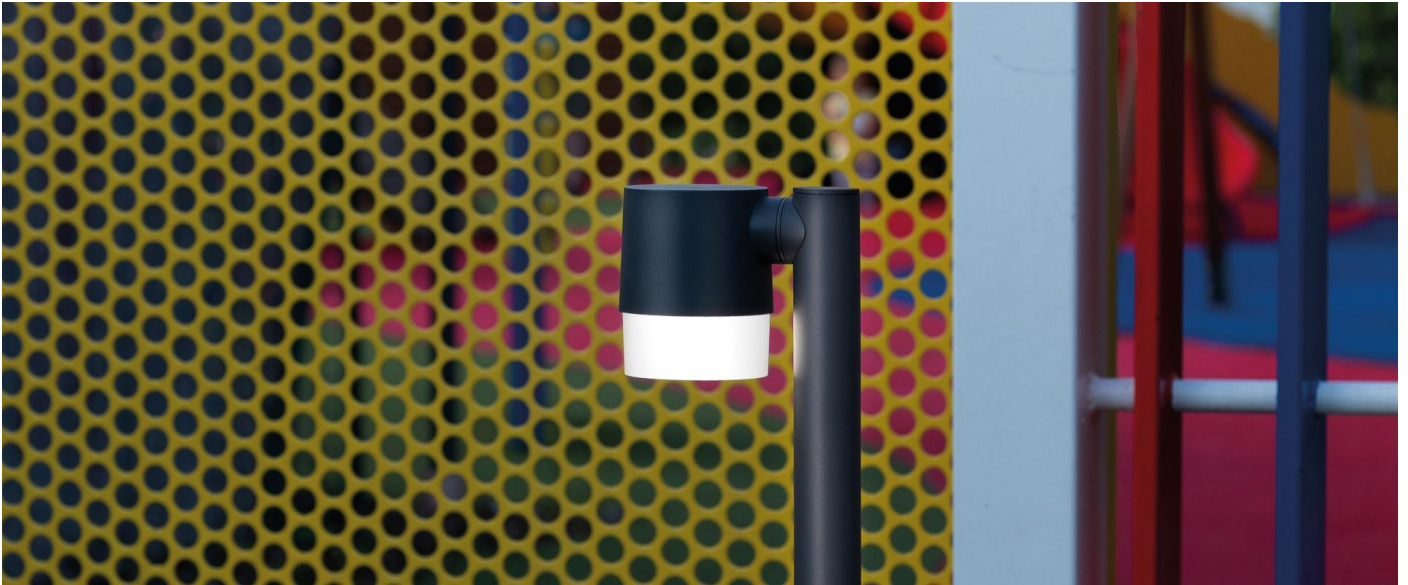


Kit Clic Up Post 40 H1500

Lombardo.

LL14816B2

Lighting simulation:

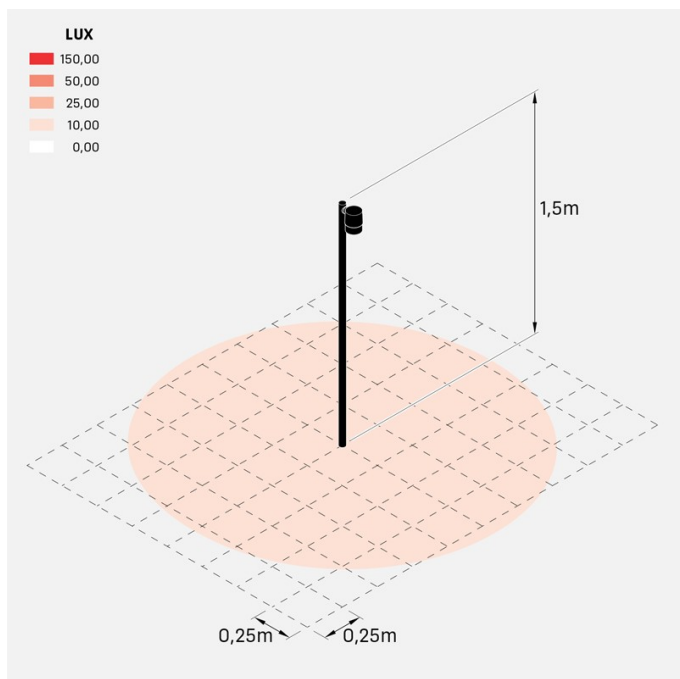

clic_up_kit_post40_H1500

Photometric curves:

