


Kit Clic Up Post 40 H1500

LL14816K3

Lombardo.

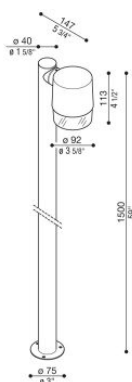

Technical information:


Installation:	Ground
Material:	Polycarbonate
Finish:	Corten
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B50 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	5
Lumen:	600
Real Lumen:	330
Power supply:	✓ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Type of protection:	IP 65
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK
Dimming	Phase cut

GU10 version: light bulb not included. Kit consisting of Clic Post, Forty Pole with top cap and Forty Post fixing base.

Kit Clic Up Post 40 H1500


Lombardo.

LL14816K3

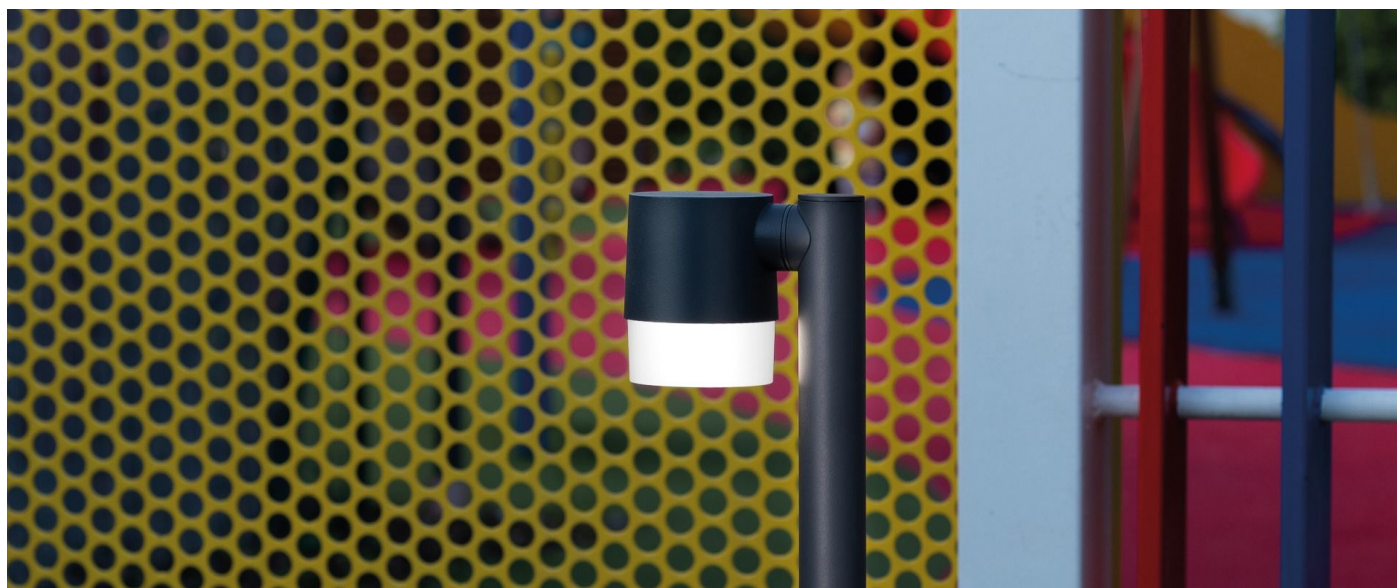

LL14816K3

Lighting simulation:

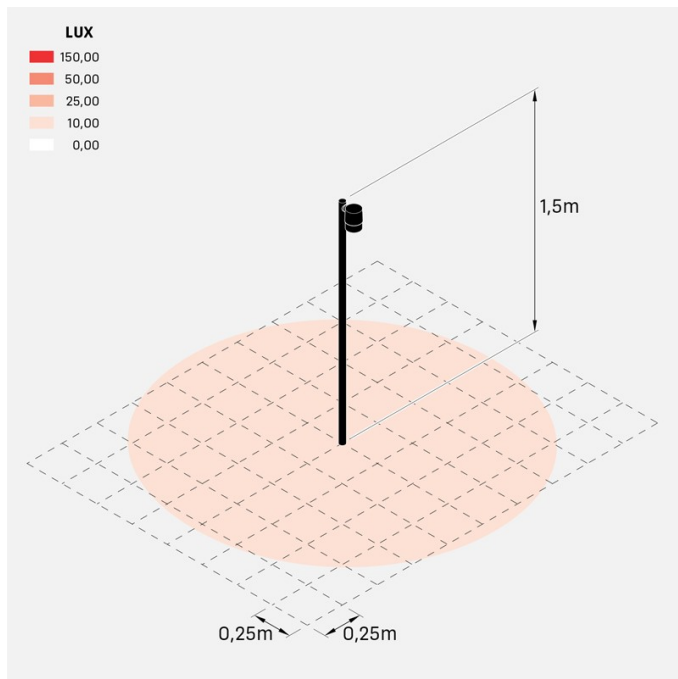

clic_up_kit_post40_H1500

Photometric curves:

