


Technical information:

Installation:	Ground
Material:	Aluminium
Finish:	Dark Grey RAL 7021
Treatment:	Sea Treatment
Diffuser type:	Serigraphed glass
Lamp type:	LED
Energy performance class:	F
Colour temperature:	4000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Step MacAdam:	3
Photobiological risk:	RG0
Power consumption (Watt):	15
Lumen:	1650
Real Lumen:	425
Power supply:	✓ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Power cable:	5 m H05RN-F 3x1
Type of protection:	IP 66
Resistance to breakage:	IK 07 2J xx5
Standards and Marks of Conformity:	CE UK ENEC
Additional features:	☀ 55°C MAX
Dimming	Phase cut


Adjustable height: from 1.20m to 3m approx. It is recommended that the product is at least 50cm underground. Supplied with 5m total H05RN-F 3x1 cable (cable length from Hasta head).




Hasta Garden

LL15102DN

Lombardo.

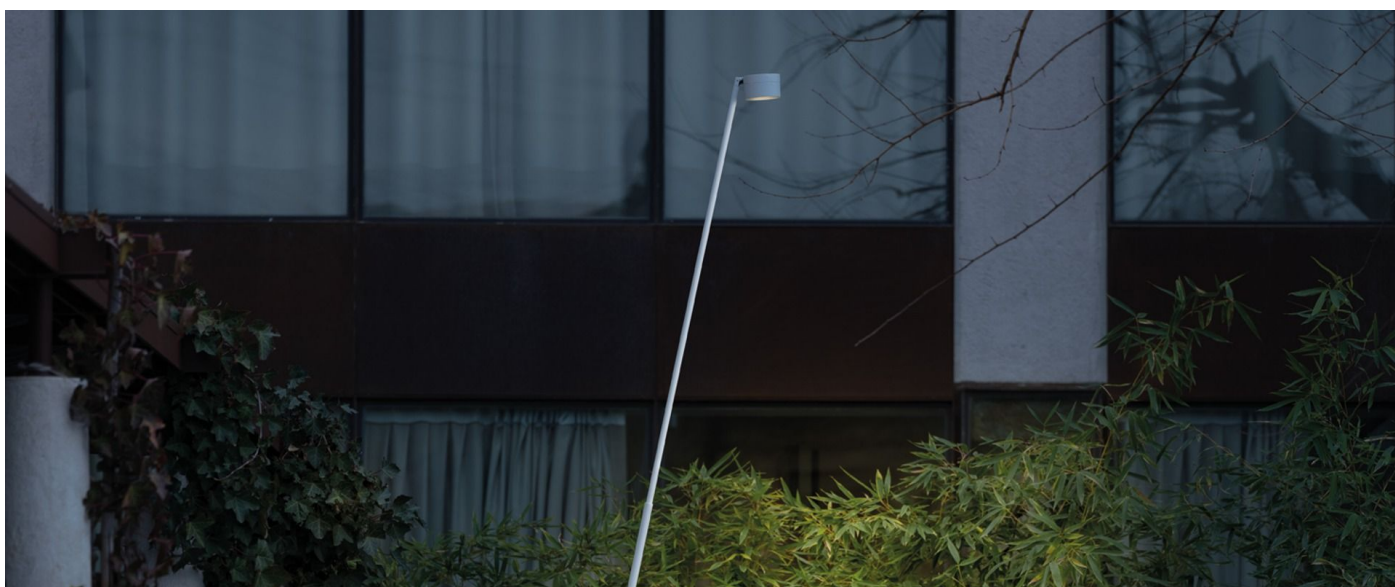

Installation images:




Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

LL15102DN


Lighting simulation:

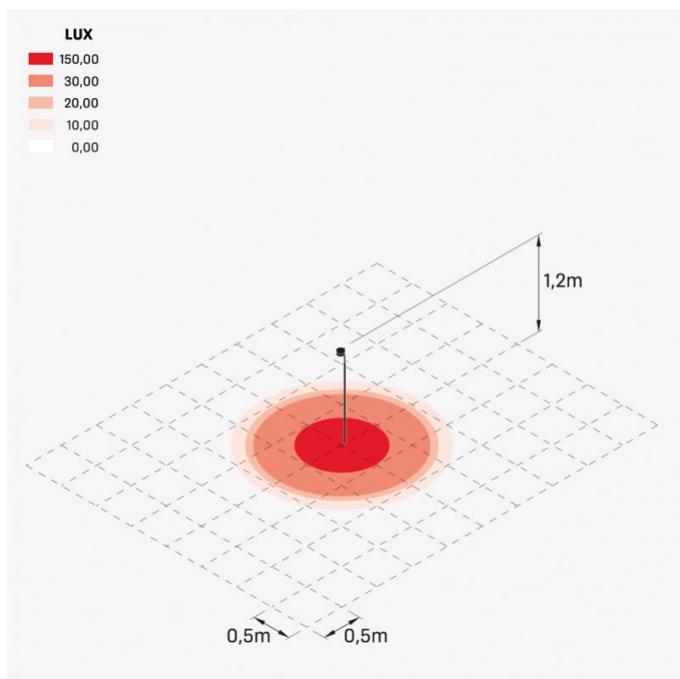

hasta_garden_1_2m

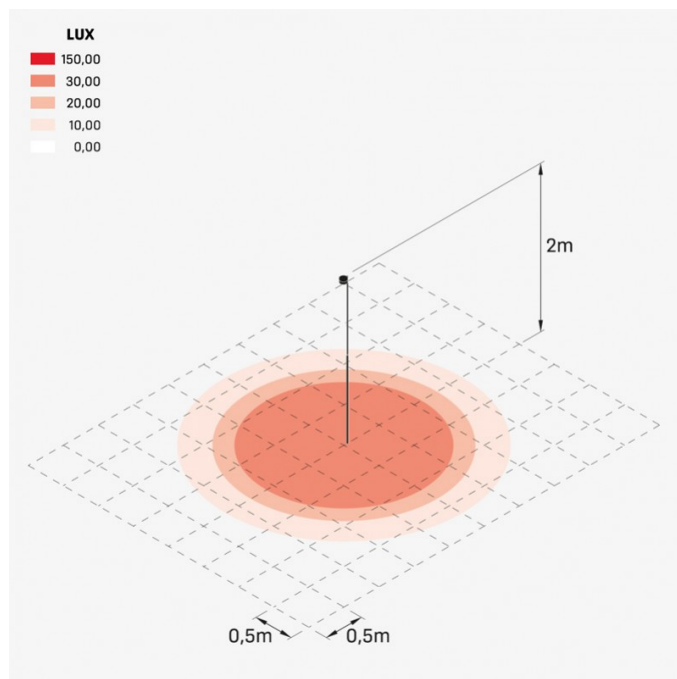

hasta_garden_2m

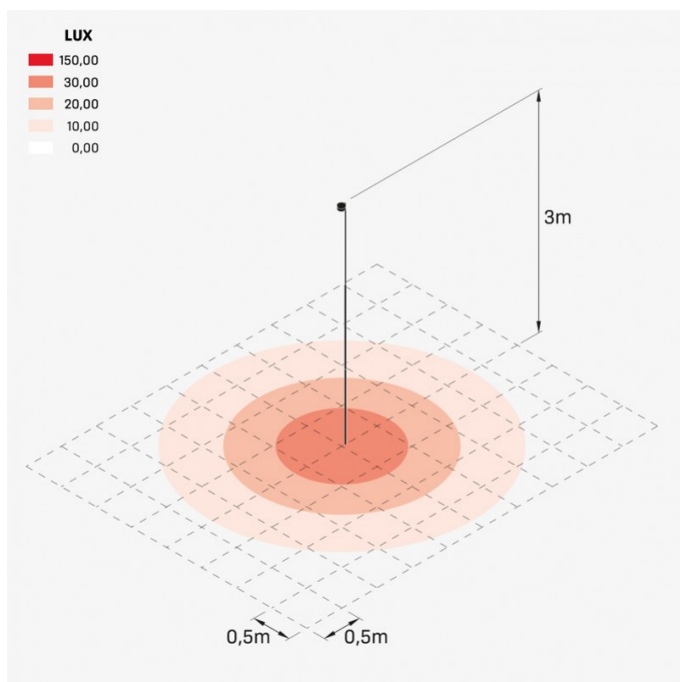

hasta_garden_3m

Photometric curves:

