


### Technical information:

Installation:	Ground
Material:	Aluminium
Finish:	White RAL 9003
Treatment:	Sea Treatment
Diffuser type:	Serigraphed glass
Lamp type:	LED
Energy performance class:	F
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Step MacAdam:	3
Photobiological risk:	RG0
Power consumption (Watt):	15
Lumen:	1650
Real Lumen:	425
Power supply:	☑ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Power cable:	5 m H05RN-F 3x1
Type of protection:	<b>IP 66</b>
Resistance to breakage:	<b>IK 07 2J xx5</b>
Standards and Marks of Conformity:	CE UK ERA
Additional features:	☀ 55°C MAX
Dimming	Phase cut


Adjustable height: from 1.20m to 3m approx. It is recommended that the product is at least 50cm underground. Supplied with 5m total H05RN-F 3x1 cable (cable length from Hasta head).



# Hasta Garden

LL15102W2

Lombardo.

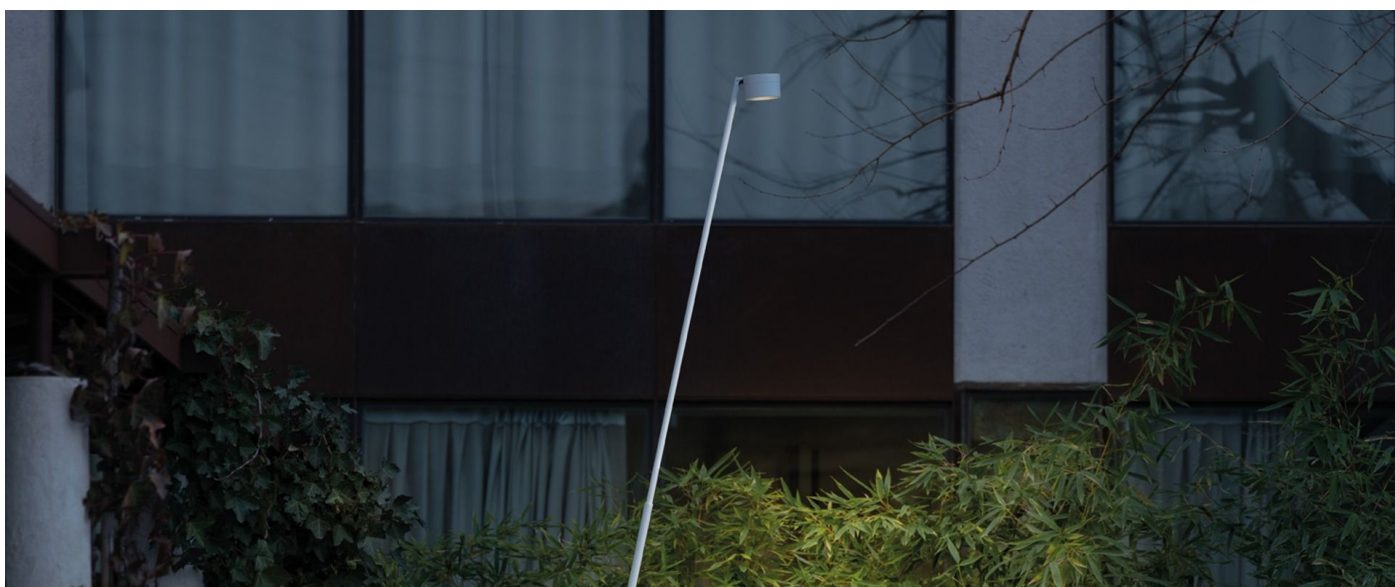


## Installation images:




LL15102W2


## Lighting simulation:

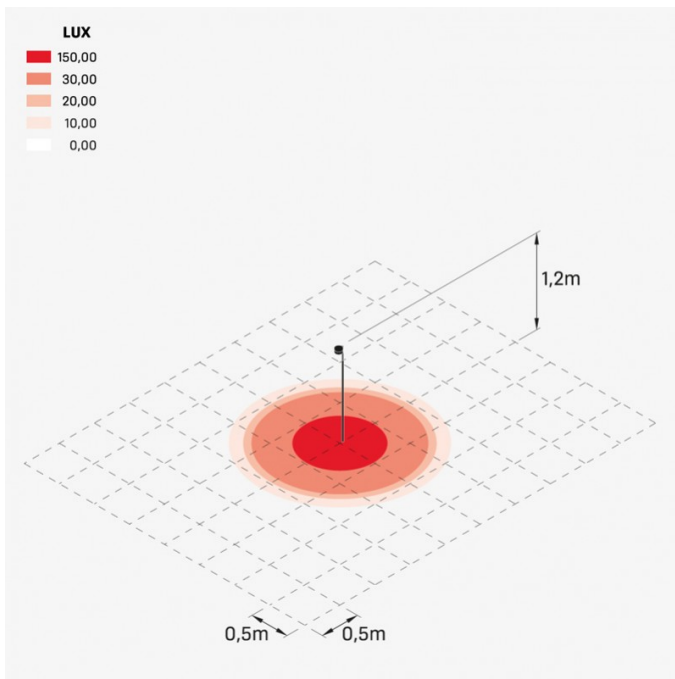

hasta\_garden\_1\_2m

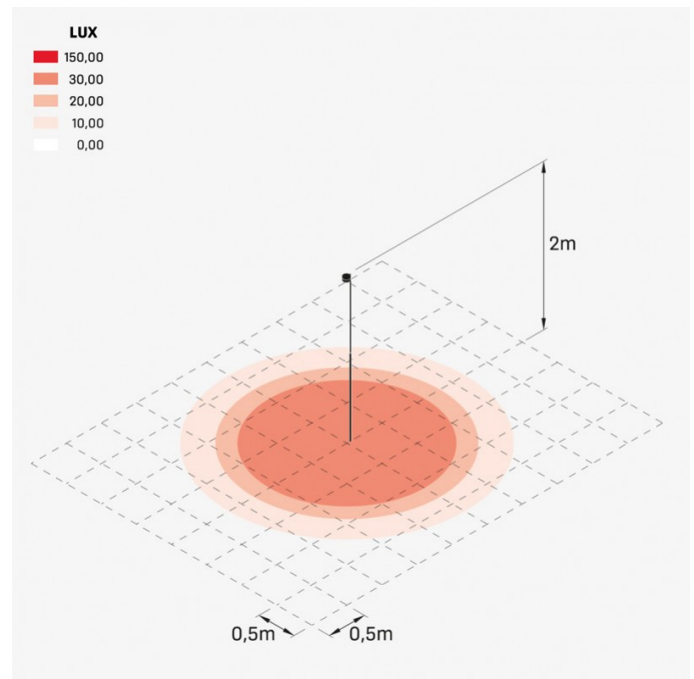

hasta\_garden\_2m

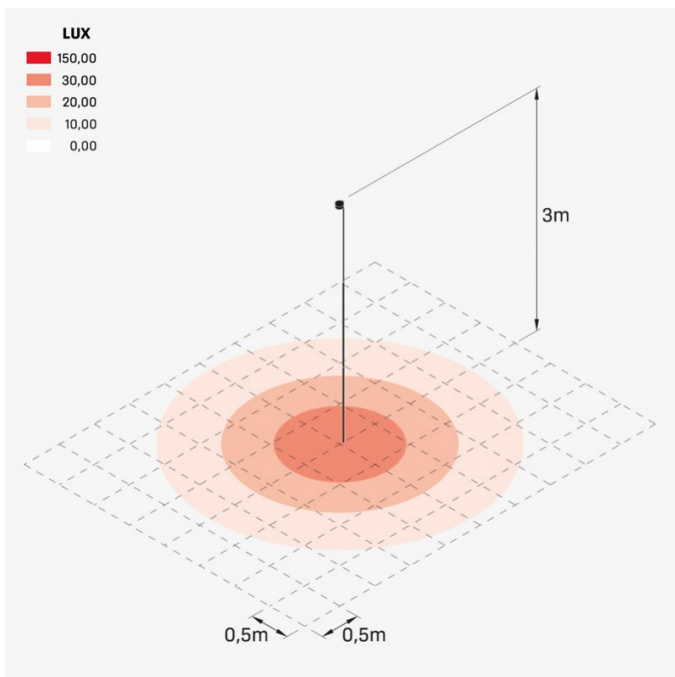

hasta\_garden\_3m

### Photometric curves:

