


Lula UP Bracket 150

LL15304D2


Lombardo.

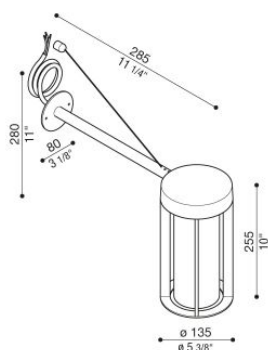

Technical information:

Installation:	Wall
Material:	Aluminium
Finish:	Dark Grey RAL 7021
Treatment:	Sea Treatment
Diffuser type:	Frosted glass
Lamp type:	LED
Energy performance class:	F
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B50 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	12
Lumen:	1330
Real Lumen:	1100
Power supply:	✓ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Power cable:	1 m H05RN-F 3x1
Type of protection:	IP 65
Resistance to breakage:	IK 03 0,35J xx2
Standards and Marks of Conformity:	CE UK CA
Dimming	Phase cut

Glass diffuser.



Lula UP Bracket 150

LL15304D2

Lombardo.



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it

Lula UP Bracket 150

LL15304D2

Lombardo.

Photometric curves:

