

LP SLIM ROUND SUSPENDED

LP Slim Round Suspended - 5741099537

The slim housing encircles a high-efficient acrylic diffuser emitting diffused primarily downward directed light. The slim body has a slight curvature and an inner curve which reduces contrast. The product family comes in a range of sizes and mounting options for a wide range of applications. Surface mounted and suspended versions have an indirect light component.



**Set location -
KEA**



LP Slim Round Suspended

Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Mounting

Suspension: Cord 2x0.75 mm², 5m. Driver integrated in canopy.

Finish

White or black, powder coated or clear lacquered, pickled aluminium.

Materials

Reflector: Die cast aluminium. Diffuser: Acrylic, opal. Installation lock: Aluminium.

Sizes and weights

Width x Height x Length (mm) | 248 x 147 x 248 Max 2.7 kg | 438 x 155 x 438 Max 9.7 kg | 679 x 155 x 679 Max 9.7 kg

Class

Ingress protection IP20. Electric shock protection I.

Light source

LED 3000K 13W

Lumen: 1254




Related products




LP Slim Round Semi
Recessed



LP Slim Round Surface
Mounted




LP Slim Round Recessed




LP Slim Round Wall

Light distribution diagrams


Cartesian

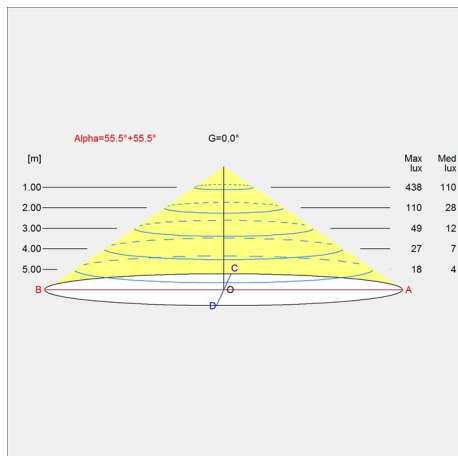

Isolux

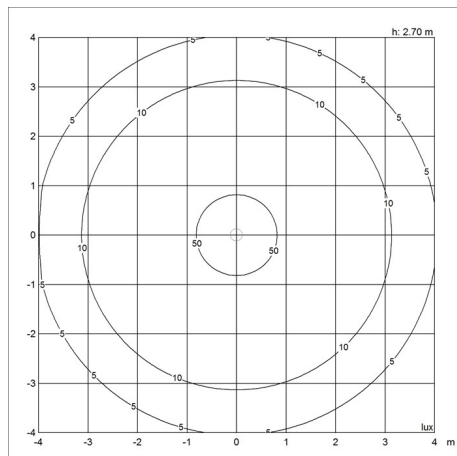

Polar

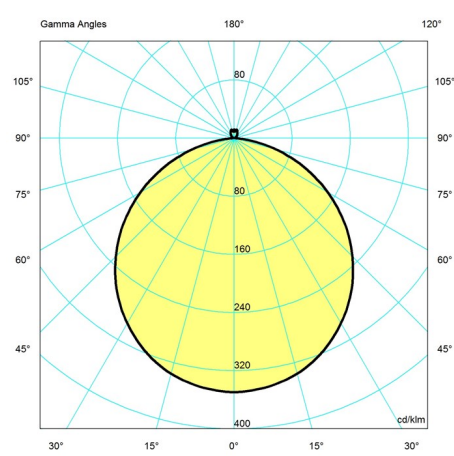

Spare parts & accessories

Product

Slim Round Ø680 diffuser opal
Slim Round Ø250 diffuser opal
Slim Round Ø440 diffuser opal

Variant number

5742584627
5742584737
5742584740

Data specifications

Colour	White
Width	248
Built-in Height	-
Class	I
Standby (W)	-
Inrush Current	-
Kelvin	3000

Length	248
Height	147
IP class	20
Net Weight	2.4
Power Factor (P = 100 % / P = 50 %)	0,77 / 0,49
Light source	LED 3000K 13W
CRI	90

LP Slim Round Suspended

SDCM	3
Watt	13
Light control	Dali
UGR Transversal / Axial	23.4/23.4
Driver life	100000

Lumen	1254
Efficacy	96
Min. Dim Level (%)	-
L80B50 (hours)	>100