

LP SLIM ROUND SUSPENDED

LP Slim Round Suspended - 5741099618

The slim housing encircles a high-efficient acrylic diffuser emitting diffused primarily downward directed light. The slim body has a slight curvature and an inner curve which reduces contrast. The product family comes in a range of sizes and mounting options for a wide range of applications. Surface mounted and suspended versions have an indirect light component.



**Set location -
KEA**



Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Mounting

Suspension: Cord 2x0.75 mm², 5m. Driver integrated in canopy.

Finish

White or black, powder coated or clear lacquered, pickled aluminium.

Materials

Reflector: Die cast aluminium. Diffuser: Acrylic, opal. Installation lock: Aluminium.

Sizes and weights

Width x Height x Length (mm) | 248 x 147 x 248 Max 2.7 kg | 438 x 155 x 438 Max 9.7 kg | 679 x 155 x 679 Max 9.7 kg

Class

Ingress protection IP20. Electric shock protection I.

Light source

LED KELVIN ADJUSTABLE

Lumen: 2499




Related products




LP Slim Round Semi
Recessed



LP Slim Round Surface
Mounted




LP Slim Round Recessed




LP Slim Round Wall

Light distribution diagrams


Cartesian

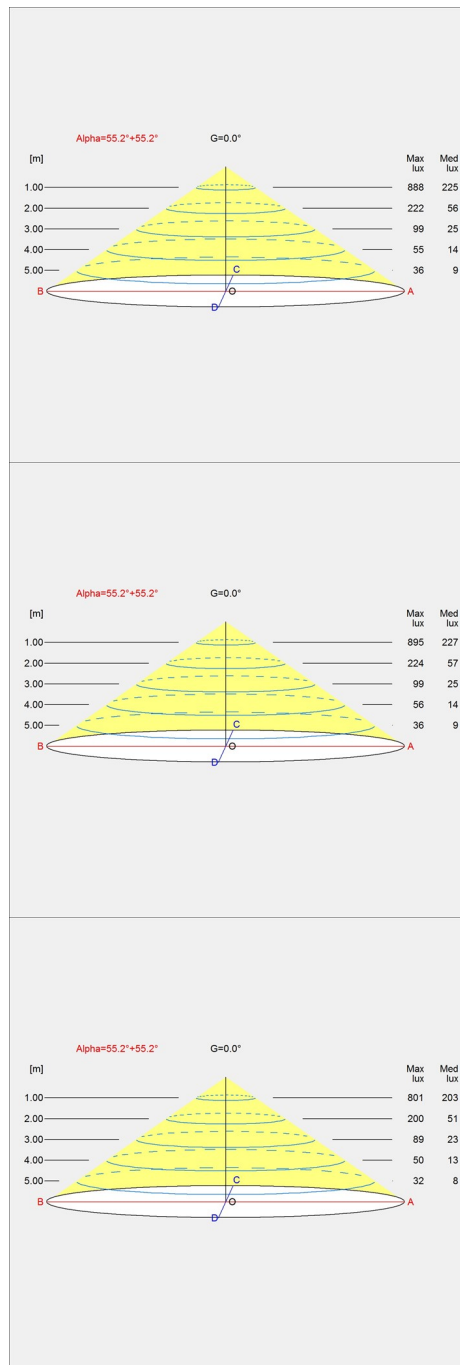


Isolux

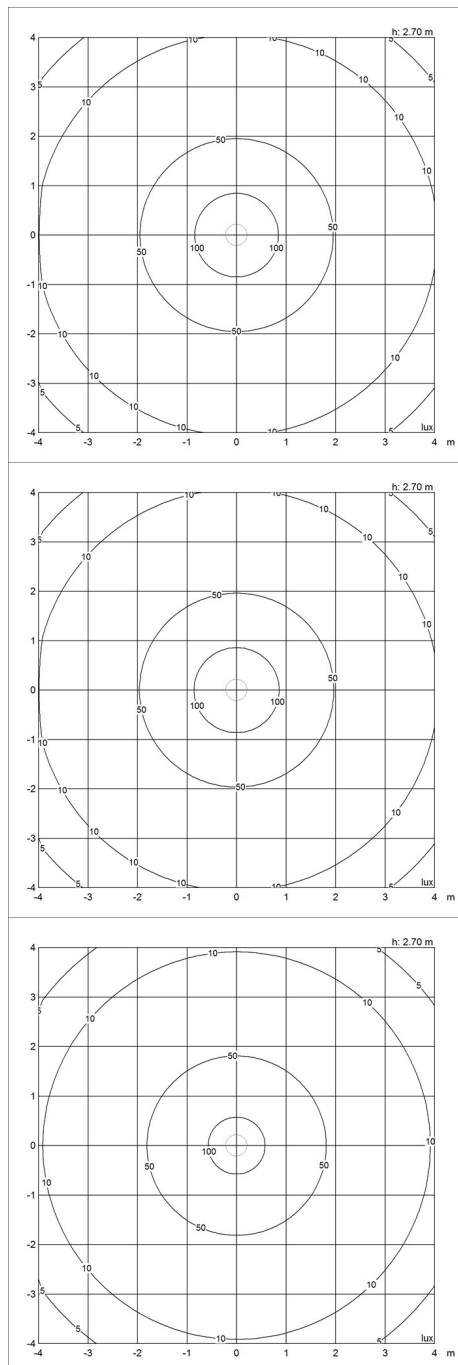


Polar

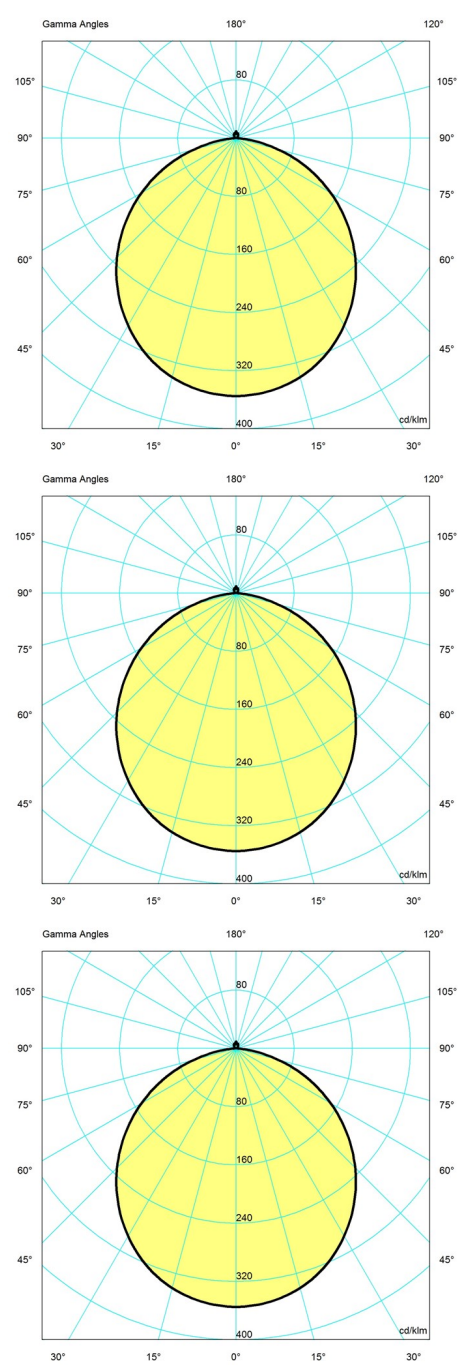


Cartesian

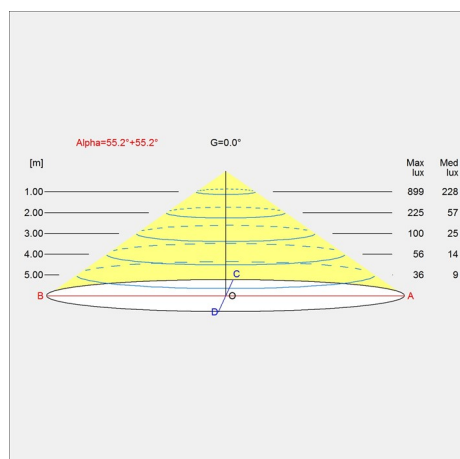

Isolux

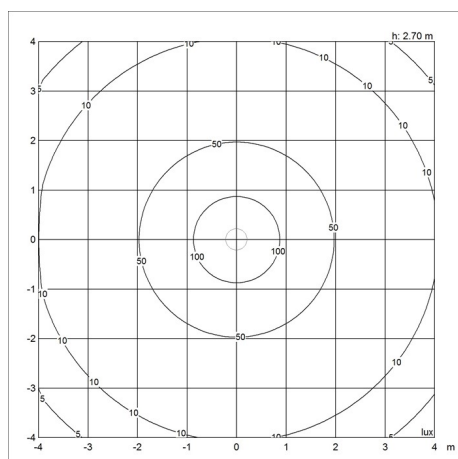

Polar

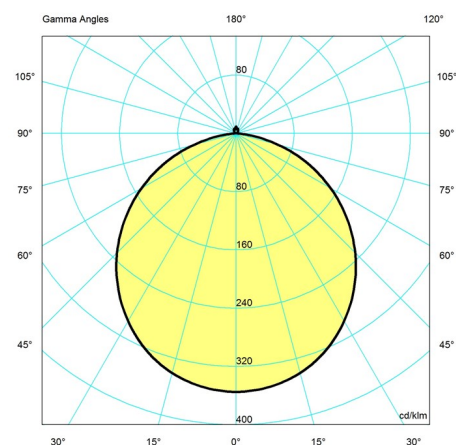

Spare parts & accessories

Product	Variant number
Slim Round Ø680 diffuser opal	5742584627
Slim Round Ø250 diffuser opal	5742584737
Slim Round Ø440 diffuser opal	5742584740

Data specifications

Colour	White	Length	438
Width	438	Height	155
Built-in Height	-	IP class	20
Class	I	Net Weight	4.5
Standby (W)	-	Power Factor (P = 100 % / P = 50 %)	-
Inrush Current	-	Light source	LED KELVIN ADJUSTABLE
Kelvin	KELV	CRI	-
SDCM	-	Lumen	2499
Watt	27	Efficacy	93
Light control	Dali kelvin adjustable	Min. Dim Level (%)	-
UGR Transversal / Axial	21.9/21.9	L80B50 (hours)	>100
Driver life	100000		

