


LP SLIM ROUND SUSPENDED

LP Slim Round Suspended - 5741102495

The slim housing encircles a high-efficient acrylic diffuser emitting diffused primarily downward directed light. The slim body has a slight curvature and an inner curve which reduces contrast. The product family comes in a range of sizes and mounting options for a wide range of applications. Surface mounted and suspended versions have an indirect light component.



**Set location -
KEA**



LP Slim Round Suspended

Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Mounting

Suspension: Cord 2x0.75 mm², 5m. Driver integrated in canopy.

Finish

White or black, powder coated or clear lacquered, pickled aluminium.

Materials

Reflector: Die cast aluminium. Diffuser: Acrylic, opal. Installation lock: Aluminium.

Sizes and weights

Width x Height x Length (mm) | 248 x 147 x 248 Max 2.7 kg | 438 x 155 x 438 Max 9.7 kg | 679 x 155 x 679 Max 9.7 kg

Class

Ingress protection IP20. Electric shock protection I.

Light source

LED 3000K 25W

Lumen: 2404




Related products




LP Slim Round Semi
Recessed



LP Slim Round Surface
Mounted




LP Slim Round Recessed




LP Slim Round Wall

Light distribution diagrams


Cartesian

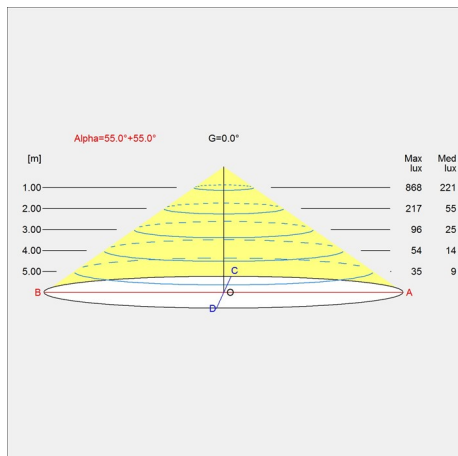

Isolux

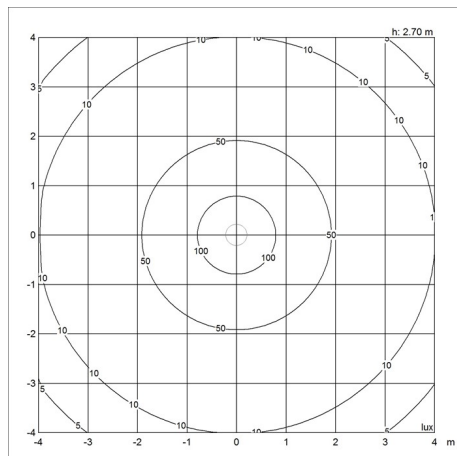

Polar

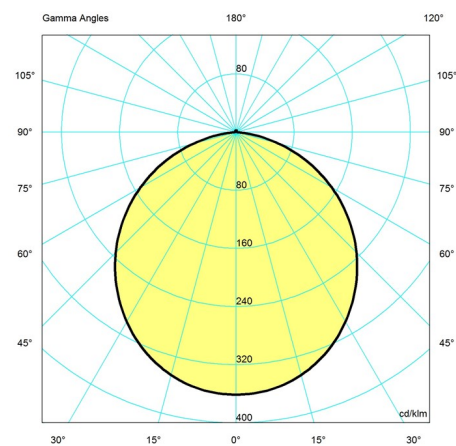

Spare parts & accessories

Product

Slim Round Ø680 diffuser opal
Slim Round Ø250 diffuser opal
Slim Round Ø440 diffuser opal

Variant number

5742584627
5742584737
5742584740

Data specifications

Colour	Dark aluminium raw
Width	438
Built-in Height	-
Class	I
Standby (W)	-
Inrush Current	-
Kelvin	3000

Length	438
Height	155
IP class	20
Net Weight	4.5
Power Factor (P = 100 % / P = 50 %)	0,94 / 0,75
Light source	LED 3000K 25W
CRI	90

LP Slim Round Suspended

SDCM	3
Watt	25
Light control	Dali
UGR Transversal / Axial	21.8/21.8
Driver life	100000

Lumen	2404
Efficacy	96
Min. Dim Level (%)	-
L80B50 (hours)	>100