


# LP SLIM ROUND SUSPENDED

LP Slim Round Suspended - 5741102505

The slim housing encircles a high-efficient acrylic diffuser emitting diffused primarily downward directed light. The slim body has a slight curvature and an inner curve which reduces contrast. The product family comes in a range of sizes and mounting options for a wide range of applications. Surface mounted and suspended versions have an indirect light component.



**Set location -  
KEA**



## LP Slim Round Suspended

## Product info

### Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

### Mounting

Suspension: Cord 2x0.75 mm<sup>2</sup>, 5m. Driver integrated in canopy.

### Finish

White or black, powder coated or clear lacquered, pickled aluminium.

### Materials

Reflector: Die cast aluminium. Diffuser: Acrylic, opal. Installation lock: Aluminium.

### Sizes and weights

Width x Height x Length (mm) | 248 x 147 x 248 Max 2.7 kg | 438 x 155 x 438 Max 9.7 kg | 679 x 155 x 679 Max 9.7 kg

### Class

Ingress protection IP20. Electric shock protection I.

### Light source

LED 3000K 53W  
Lumen: 5861




## Related products




LP Slim Round Semi Recessed



LP Slim Round Surface Mounted




LP Slim Round Recessed




LP Slim Round Wall

# Light distribution diagrams


## Cartesian

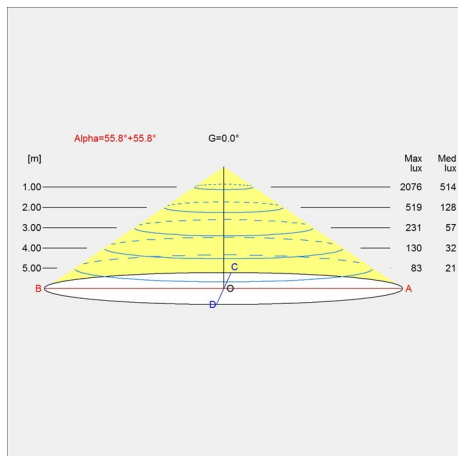

## Isolux

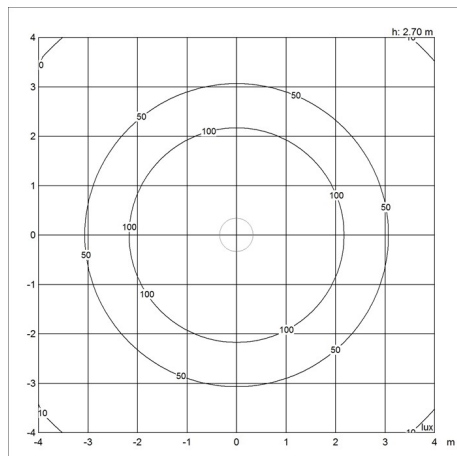

## Polar

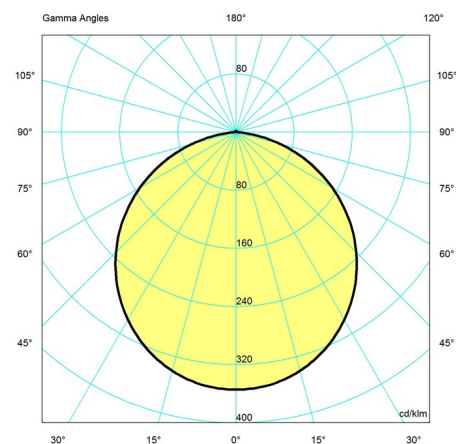

## Spare parts & accessories

### Product

Slim Round Ø680 diffuser opal  
Slim Round Ø250 diffuser opal  
Slim Round Ø440 diffuser opal

### Variant number

5742584627  
5742584737  
5742584740

## Data specifications

Colour	Dark aluminium raw
Width	679
Built-in Height	-
Class	I
Standby (W)	-
Inrush Current	-
Kelvin	3000

Length	679
Height	155
IP class	20
Net Weight	9.7
Power Factor (P = 100 % / P = 50 %)	0,97 / 0,91
Light source	LED 3000K 53W
CRI	90

**LP Slim Round Suspended**

SDCM	3
Watt	53
Light control	Dali
UGR Transversal / Axial	22.0/22.0
Driver life	100000

Lumen	5861
Efficacy	111
Min. Dim Level (%)	-
L80B50 (hours)	>100