

Linfa 80

LT14900M3

Lombardo.



Technical information:

Installation:	Ground
Material:	Fibreglass
Finish:	Brown - Brass
Treatment:	Anodization
Diffuser type:	PMMA
Lamp type:	LED
Energy performance class:	G
Colour temperature:	3000K
CRI:	>80
Photobiological risk:	RG0
Power consumption (Watt):	2
Lumen:	140
Real Lumen:	68
Power supply:	⊗ not included
LED:	24V
Insulation class:	⬡ CL.III
Power cable:	3 m PVC 2x0.25mm
Type of protection:	IP 66
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK CA




Linfa 80

LT14900M3

Lombardo.



Installation images:



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Linfa 80

LT14900M3

Lombardo.

Photometric curves:

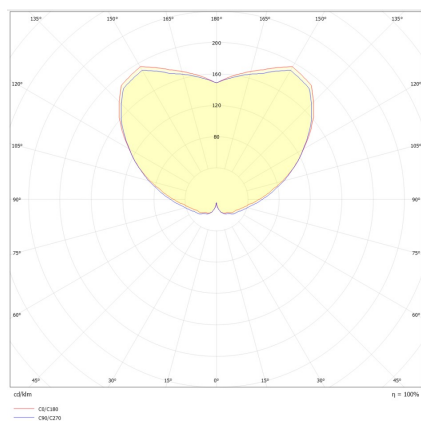

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it