




### Technical information:

|                                    |                     |
|------------------------------------|---------------------|
| Installation:                      | Ground              |
| Material:                          | Fibreglass          |
| Finish:                            | All Black           |
| Treatment:                         | Anodization         |
| Diffuser type:                     | PMMA                |
| Lamp type:                         | LED                 |
| Energy performance class:          | G                   |
| Colour temperature:                | 4000K               |
| CRI:                               | >80                 |
| Photobiological risk:              | RG0                 |
| Power consumption (Watt):          | 2                   |
| Lumen:                             | 140                 |
| Real Lumen:                        | 85                  |
| Power supply:                      | ⊗ not included      |
| LED:                               | 24V                 |
| Insulation class:                  | ⚡ CL.III            |
| Power cable:                       | 3 m PVC 2x0.25mm    |
| Type of protection:                | <b>IP 66</b>        |
| Resistance to breakage:            | <b>IK 06 1J xx3</b> |
| Standards and Marks of Conformity: | CE UK CA            |




# Linfa O 120

LT14911AN

**Lombardo.**



## Installation images:

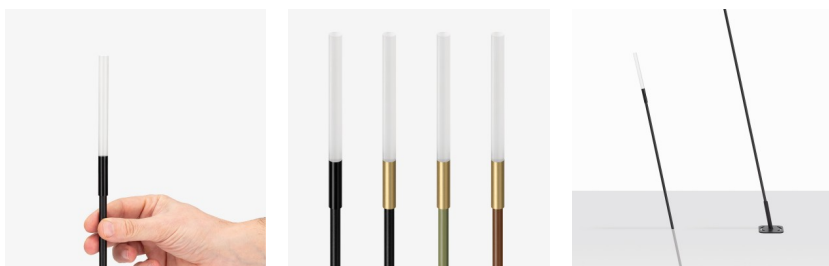

**Lombardo S.r.l.**

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E [info@lombardo.it](mailto:info@lombardo.it)

**lombardo.it**

# Linfa 0 120

## LT14911AN

**Lombardo.**

### Photometric curves:



**Lombardo S.r.l.**

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E [info@lombardo.it](mailto:info@lombardo.it)

**lombardo.it**