


Kit Clic Post 40 H1500

LU14806K

Lombardo.

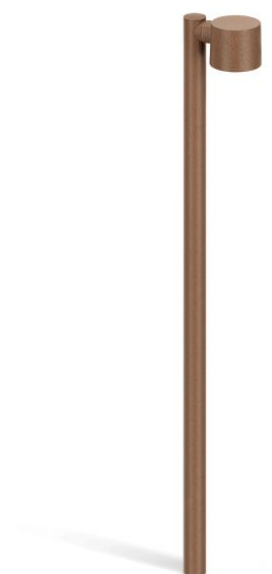

Technical information:

Installation:	Ground
Material:	Polycarbonate
Finish:	Corten
Diffuser type:	Polycarbonate
Lamp type:	Lamp
Photobiological risk:	RG0
Type of bulb socket:	GU10
Lamp max:	1x7
Insulation class:	□ CL.II
Type of protection:	IP 65
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE ^{UK} _{CA}

GU10 version: light bulb not included. Kit consisting of Clic Post, Forty Pole with top cap and Forty Post fixing base.

Kit Clic Post 40 H1500

LU14806K

Lombardo.



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Kit Clic Post 40 H1500

LU14806K

Lombardo.

Lighting simulation:

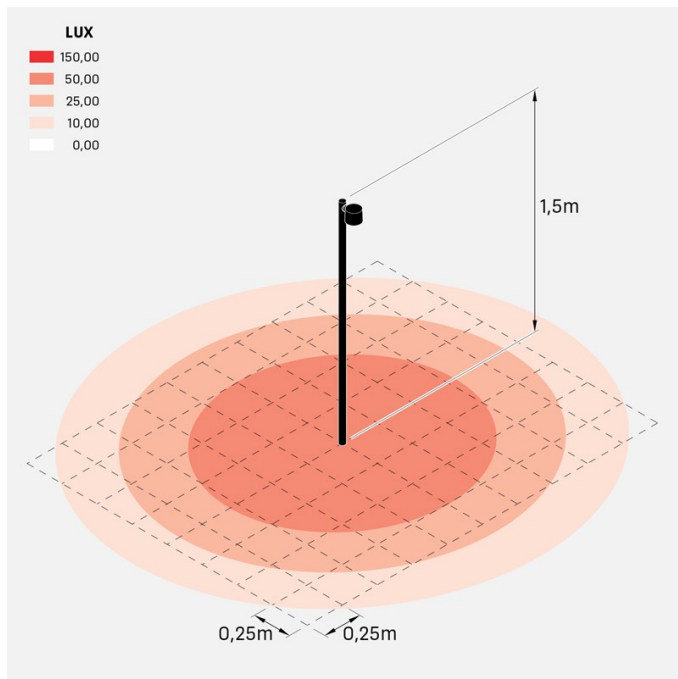

clic_kit_post40_H1500