

NJP FLOOR

NJP Floor - 5744165921

The fixture provides direct glare-free horizontal light while reflecting some of the light through the rear of the head, illuminating the top of the arm. The ergonomic design of the fixture head shapes the light and gives optimal light direction. A simple mechanical system provides great freedom of movement, so the light can always be set in the ideal position in the workspace. The shade is painted white on the inside, reflecting comfortable diffused light.



nendo

In 2002 Oki Sato founded nendo design studio. nendo means 'clay' in Japanese – or more specifically, modelling clay such as plasticine. A unique material that makes it easy to do creative modelling.



Product info

Information

Driver fitted externally on cord. The light has two built-in intensities. The weight includes the base plate. This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician.

Mounting

Cord type: Black or white. Cord length: 1,7m. Switch: On the fixture head. Timer function: 4 hours or 8 hours. LED driver: separate, plugs into power outlet. The light has two built-in intensities.

Finish

White, Black or Light Aluminium Grey, powder coated.

Materials

Base: Steel. Arms and lamp head: Aluminium. Joints: Anodised Aluminium. Stem: Aluminium.

Sizes and weights

Width x Height x Length (mm) | 260 x 1250 x 560 Max 7.2 kg

Class

Ingress protection IP20. Electric shock protection II.


Light source

LED 3000K 10W

Lumen: 550

Information

Driver fitted externally on cord. The light has two built-in intensities. The weight includes the base plate. This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician.

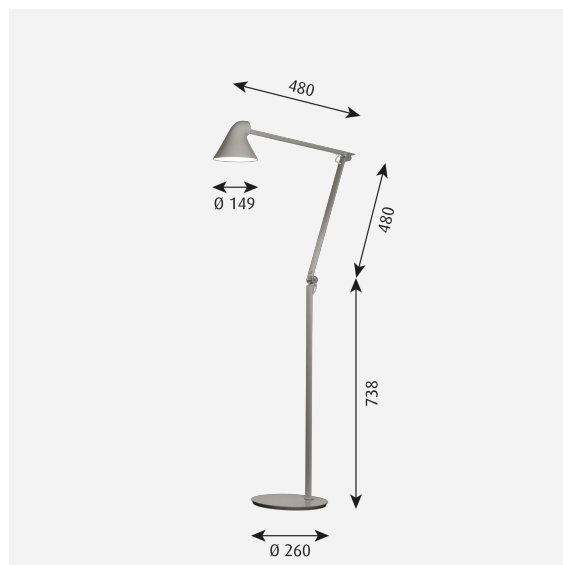

Related products



NJP Table




NJP Wall




NJP Mini

Light distribution diagrams


Cartesian

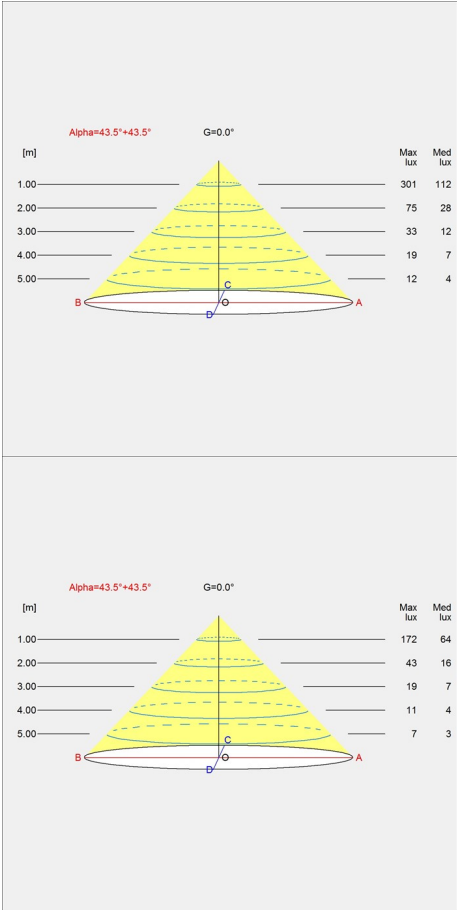

Isolux

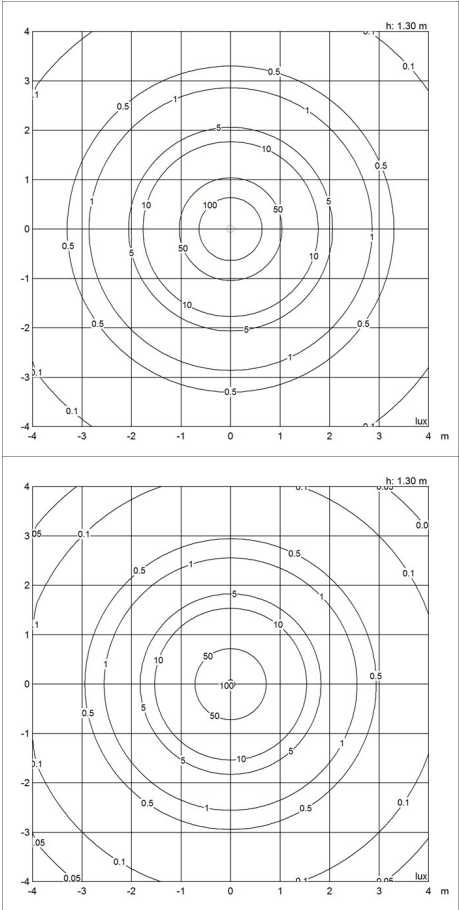

Polar

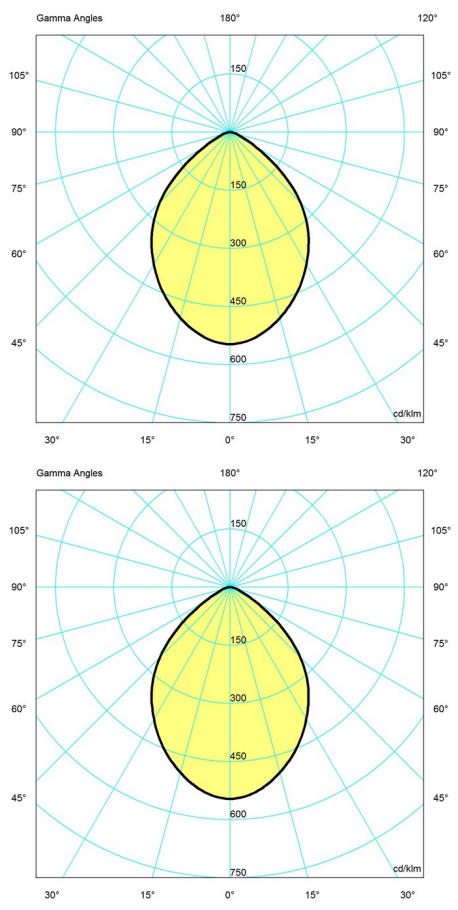

Spare parts & accessories

Product	Variant number
Adaptor 12V black	5744164867
Adaptor 12V white	5744164870
NJP bushing plast	5744165183
NJP FLOOR BASE BLACK	5744165112
NJP Floor base white	5744165125
NJP FLOOR BASE DARK GREY	5744165837
NJP FLOOR BASE LIGHT GREY	5744165840

Data specifications

Colour	Light aluminium grey
Width	260
Built-in Height	-
Class	II
Standby (W)	-
Inrush Current	-
Kelvin	3000
SDCM	3
Watt	10
Light control	-
UGR Transversal / Axial	19.4/19.4
Driver life	-

Length	560
Height	1250
IP class	20
Net Weight	7.2
Power Factor (P = 100 % / P = 50 %)	0.53/0.46
Light source	LED 3000K 10W
CRI	97
Lumen	550
Efficacy	55
Min. Dim Level (%)	50
L80B50 (hours)	>100.000