

# NJP TABLE

NJP Table - 5744164980

The fixture provides direct glare-free horizontal light while reflecting some of the light through the rear of the head, illuminating the top of the arm. The ergonomic design of the fixture head shapes the light and gives optimal light direction. A simple mechanical system provides great freedom of movement, so the light can always be set in the ideal position in the workspace. The shade is painted white on the inside, reflecting comfortable diffused light.



## nendo

In 2002 Oki Sato founded nendo design studio. nendo means 'clay' in Japanese – or more specifically, modelling clay such as plasticine. A unique material that makes it easy to do creative modelling.



**Set location -  
Kanslergade**



**NJP - Biblioteket Kulturværftet**

## Product info

### Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

### Information

Driver fitted externally on cord. The light has two built-in intensities. The weight includes the base plate. This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician.

### Mounting

Cord type: Plastic. Cord length: 2m. Switch: On the fixture head. Timer function: 4 hours/8 hours. Table thickness: Ø10 Pin: 12-50mm. Ø40 Pin: 5-35mm. Clamp: up to 45mm. LED driver: separate, plugs into power outlet. The light has two built-in intensities.

### Finish

White, Black or Light Aluminium Grey, powder coated.

### Materials

Base: Steel. Arms and lamp head: Aluminium. Joints: Anodised aluminium.

### Sizes and weights

Width x Height x Length (mm) | 220 x 480 x 480 Max 5.1 kg

### Class

Ingress protection IP20. Electric shock protection II.

### Light source

LED 3000K 10W

Lumen: 529

### Information

Driver fitted externally on cord. The light has two built-in intensities. The weight includes the base plate. This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician.



## Related products



NJP Wall




NJP Floor




NJP Mini

# Light distribution diagrams


## Cartesian

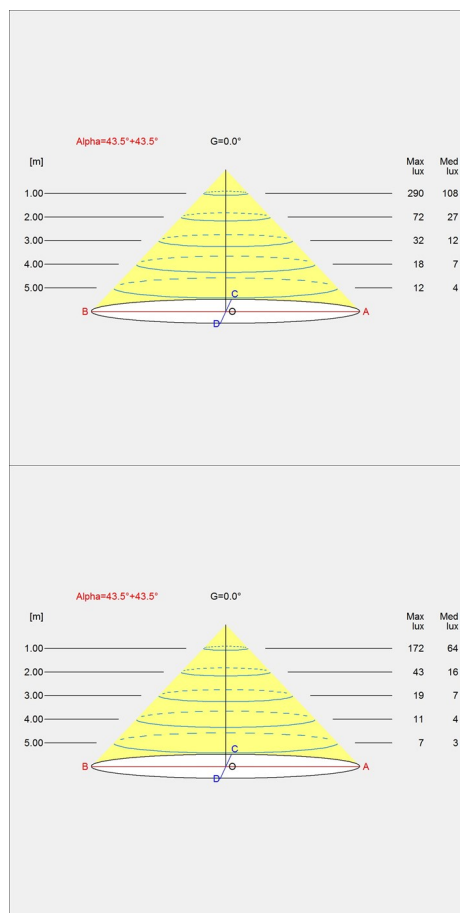

## Isolux

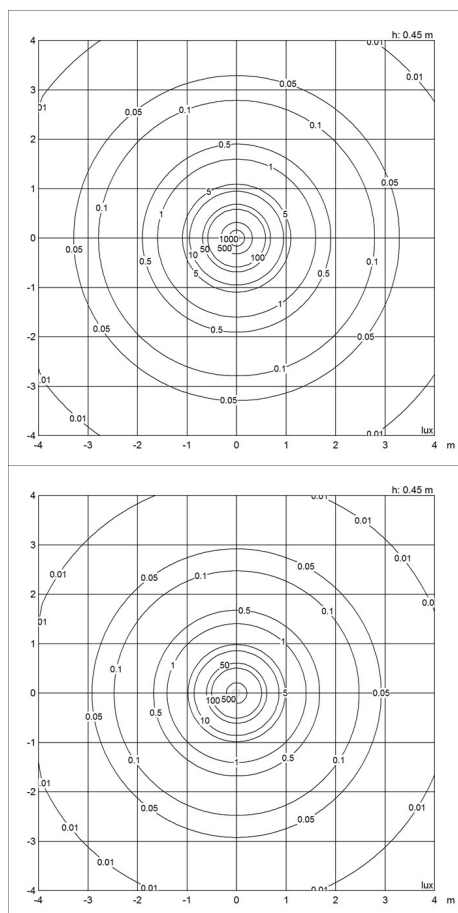

## Polar

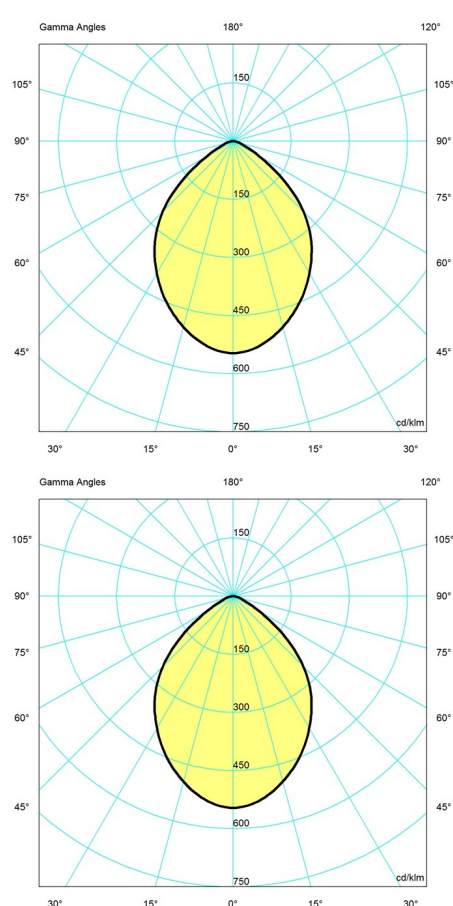

## Spare parts & accessories

| Product                    | Variant number |
|----------------------------|----------------|
| NJP TABLE BASE WHT         | 5744164689     |
| NJP TABLE BASE BLK         | 5744164692     |
| NJP TABLE CLAMP WHT        | 5744164702     |
| NJP TABLE CLAMP BLK        | 5744164715     |
| NJP TABLE PIN Ø10          | 5744164728     |
| Adaptor 12V black          | 5744164867     |
| Adaptor 12V white          | 5744164870     |
| NJP TABLE PIN Ø40          | 5744165170     |
| NJP TABLE BASE DARK GREY   | 5744165798     |
| NJP TABLE BASE LIGHT GREY  | 5744165808     |
| NJP TABLE CLAMP DARK GREY  | 5744165811     |
| NJP TABLE CLAMP LIGHT GREY | 5744165824     |
| NJP bushing plast          | 5744165183     |

## Data specifications

|                         |                   |                                     |                      |
|-------------------------|-------------------|-------------------------------------|----------------------|
| Colour                  | <b>Black</b>      | Length                              | <b>480</b>           |
| Width                   | <b>220</b>        | Height                              | <b>480</b>           |
| Built-in Height         | -                 | IP class                            | <b>20</b>            |
| Class                   | <b>II</b>         | Net Weight                          | <b>1.3</b>           |
| Standby (W)             | -                 | Power Factor (P = 100 % / P = 50 %) | -                    |
| Inrush Current          | -                 | Light source                        | <b>LED 3000K 10W</b> |
| Kelvin                  | <b>3000</b>       | CRI                                 | <b>97</b>            |
| SDCM                    | -                 | Lumen                               | <b>529</b>           |
| Watt                    | <b>10</b>         | Efficacy                            | <b>53</b>            |
| Light control           | -                 | Min. Dim Level (%)                  | <b>50</b>            |
| UGR Transversal / Axial | <b>19.3/19.3</b>  | L80B50 (hours)                      | <b>&gt;100.000</b>   |
| Driver life             | <b>&gt;50.000</b> |                                     |                      |