
NOVATRADE LIGHTING
Outdoor Brass Lighting Fixtures
EST. 2013

REFERENCE
NT-WW-BR

Wall Washer

Wall washer, raw brass.

FINISH Brass, patina over time

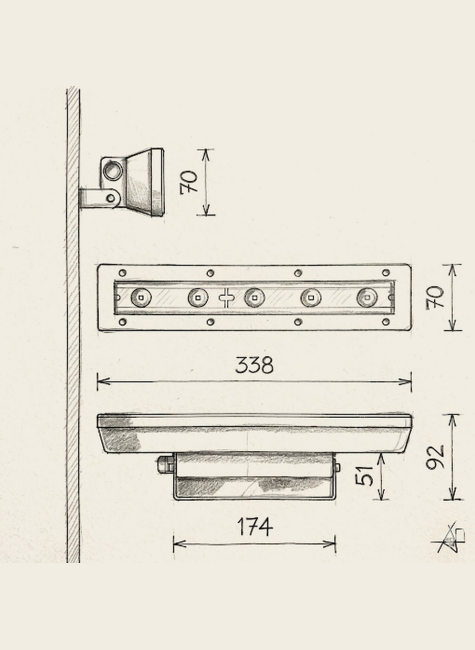



IP65
OUTDOOR, WEATHERPROOF

338 mm
LENGTH

750-1050 lm
5 W OR 7.3 W

1500 g
RAW BRASS

GENERAL

Location	Outdoor
Application	Wall / Ground
Material	Raw brass
Finish	Brass, patina over time
Protection	IP65

DIMENSIONS

Length	338 mm
Width	70 mm
Depth	92 mm
Weight	1500 g

LIGHT SOURCE

Light source	LED CRI 80 HP, 5 W or 7.3 W
Lens	25° / 40° / oval beam 30 x 65°
Reflector	10° / 20°

LUMINOUS FLUX, 2700 K

5 W	750 lm
7.3 W	1050 lm


ELECTRICAL


Voltage	230 V
Driver	CC 350 mA / 500 mA included

Photometry


Light distribution and wall illuminance, 3000 K, 45° lens.

LIGHT DISTRIBUTION

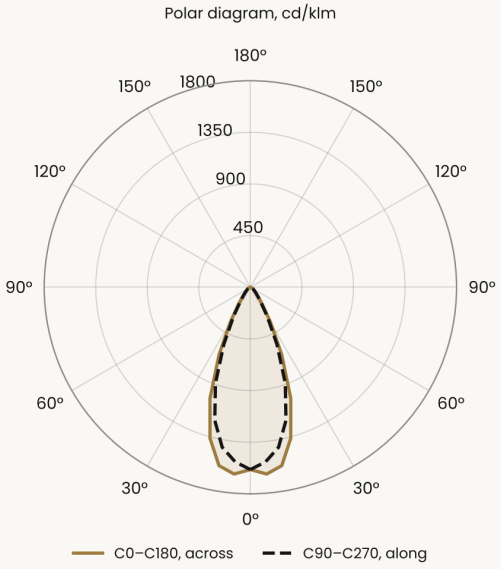

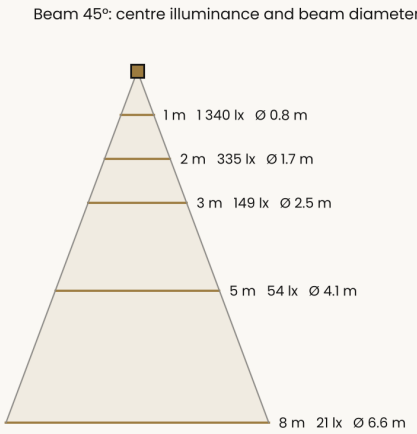

WALL ILLUMINANCE

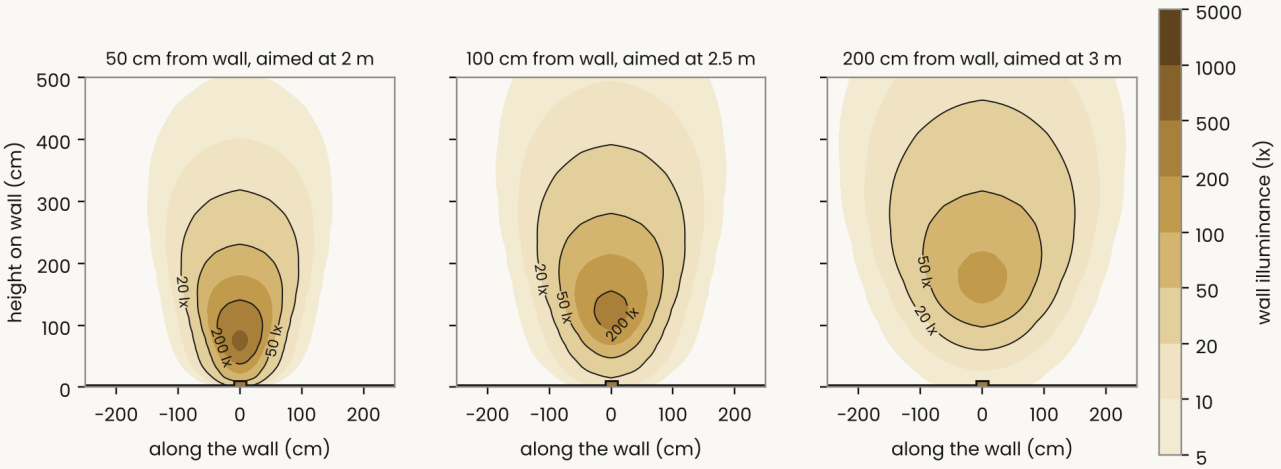

DISTANCE FROM WALL	AIMED AT	MAX. ON WALL	20 LX UP TO	WIDTH AT 50 LX	AREA ≥ 20 LX
50 cm	2 m	590 lx	3.2 m	1.35 m	4.8 m²
1 m	2.5 m	250 lx	3.9 m	1.65 m	7.0 m²
2 m	3 m	120 lx	4.6 m	1.90 m	9.4 m²

PHOTOMETRIC DATA

Luminaire flux	820 lm
Power	8.1 W
Efficacy	101 lm/W
CCT / CRI	3000 K / CRI > 90
Beam angle	45° (field angle 70°)
Max. intensity	1340 cd

NOTES

Wall illuminance computed point by point from the photometric data, luminaire on the ground facing the wall, at nominal flux, with no maintenance factor and no reflections.