


On Wall One

Wall spot, raw brass.

FINISH Brass, patina over time

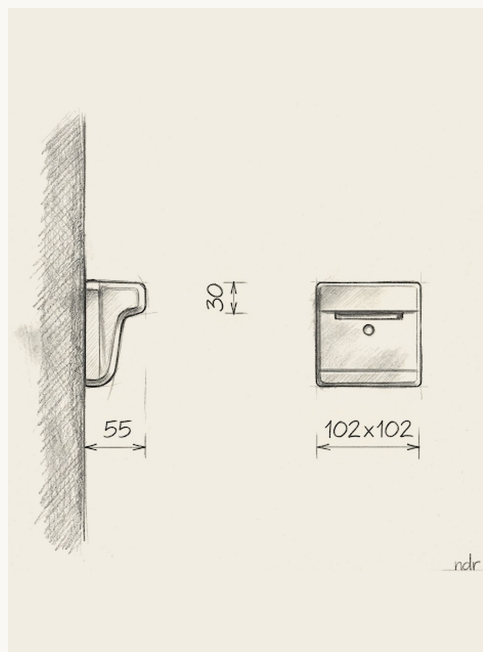

IP54

INDOOR, OUTDOOR

102 mm

SQUARE

150-230 lm

1 W OR 1.5 W

480 g

RAW BRASS

GENERAL

Location	Indoor / Outdoor
Application	Wall
Material	Raw brass
Finish	Brass, patina over time
Protection	IP54

DIMENSIONS

Length	102 mm
Width	102 mm
Depth	55 mm
Weight	480 g

LIGHT SOURCE

Light source	LED CRI 90 HP, 1 W or 1.5 W
--------------	-----------------------------

LUMINOUS FLUX

POWER	2700 K	3000 K	4000 K
1 W	150 lm	155 lm	170 lm
1.5 W	210 lm	215 lm	230 lm
Option	Also available with 2 HP LEDs, up to 420 lm		


ELECTRICAL

Voltage	230 V
Driver	CC 350 mA / 500 mA not included
Alternative	24 V AC/DC supply with DC/CC step-down converter not included


Photometry

Light distribution and floor illuminance, 2700 K.

LIGHT DISTRIBUTION

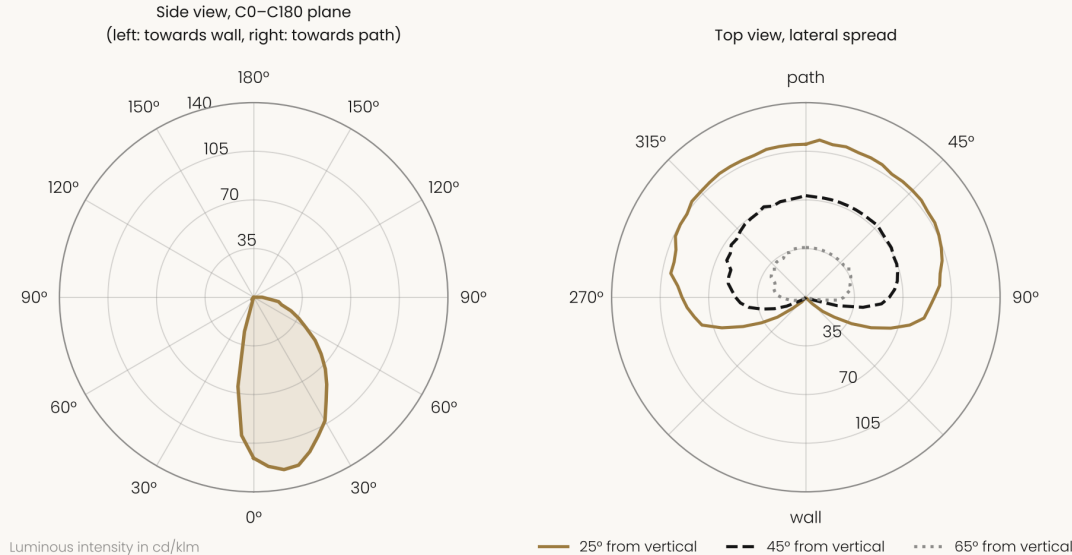

FLOOR ILLUMINANCE

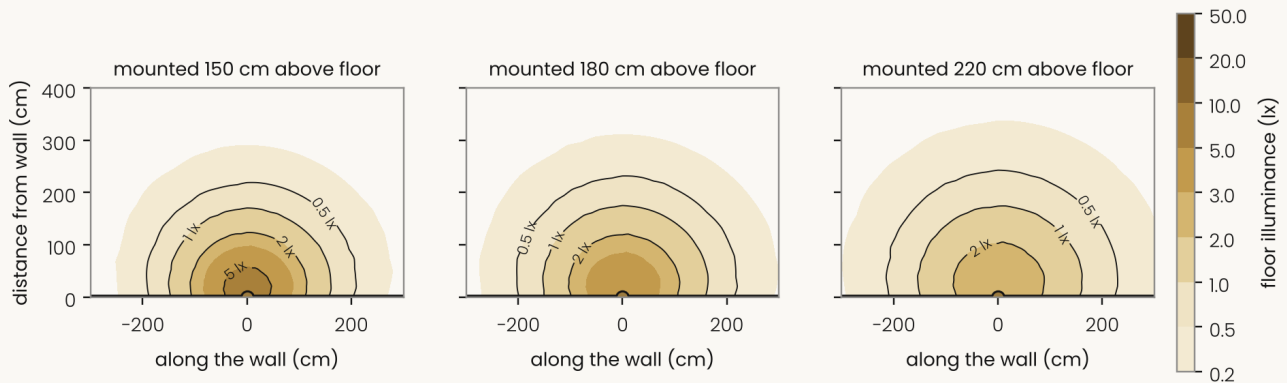

MOUNTING HEIGHT	AT 0.5 M	AT 1 M	AT 2 M	1 LX REACH	AREA ≥ 1 LX
1.5 m	5.4 lx	2.8 lx	0.7 lx	1.7 m	4.3 m²
1.8 m	4.1 lx	2.5 lx	0.7 lx	1.75 m	4.5 m²
2.2 m	2.8 lx	2.0 lx	0.8 lx	1.75 m	4.5 m²

PHOTOMETRIC DATA

Luminaire flux	22 lm
Power	1.6 W, 500 mA
CCT / CRI	2700 K / CRI > 90
Light output	100 % downward
Max. intensity	15 cd at 10°

NOTES

Floor illuminance computed point by point from the photometric data, at nominal flux, with no maintenance factor and no reflections.