


PH ARTICHOKE GLASS

PH Artichoke Glass - 5741092602

The fixture provides 100% glare-free light. The 72 precisely positioned leaves form 12 unique rows of six leaves each. They illuminate the fixture, as well as emit diffused light with a unique pattern. Reflection from the light source is diffused in the sandblasted lower surfaces, and this light is reflected decoratively in the top surfaces, giving the fixture a unique glow. The surface treatment on the glass leaves eliminates direct glare. For the energy saving LED variant the quality of light and atmosphere surrounding the product is kept at the highest level.



Poul Henningsen

The very influential Danish designer, architect, writer, and cultural critic, Poul Henningsen (1894-1967), has had a huge impact on Danish thinking and design. His legacy is an integrated part of Louis Poulsen's endeavor to shape light.



Product info

Information

For LED replacement kits please do contact Louis Poulsen.

Mounting

E27: Cable 3x0,75 mm² & wire. Canopy: Yes. Cable length: 4 m. LED: Cable 2x1 mm² and wire. Canopy or external driver box contains driver. Cable length: 4 m. Maximum distance between external driver box and fixture: 20 m.

Finish

Clear glass, sandblasted.

Materials

Leaves: Clear glass, sandblasted. Top shade: High lustre chrome plated or white, spun brass. Frame: High lustre chrome plated, laser cut brass. Suspension: High lustre chrome plated, spun aluminium.

Sizes and weights

width x Height x Length (mm) | 600 x 580 x 600 Max 20.2 kg | 840 x 720 x 840 Max 29.8 kg | 720 x 650 x 720 Max 32.5 kg | 480 x 570 x 480 Max 10.9 kg

Class

Ingress protection IP20. Electric shock protection I w. ground.

Specification notes


200W E27 is only available in Ø 480. Halolux 230W E27 and LED only available in Ø 600, Ø 720 and Ø 840. The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On www.louispoulsen.com we update a list of recommendable light sources.

Light source


1x100W E27

Information

For LED replacement kits please do contact Louis Poulsen.

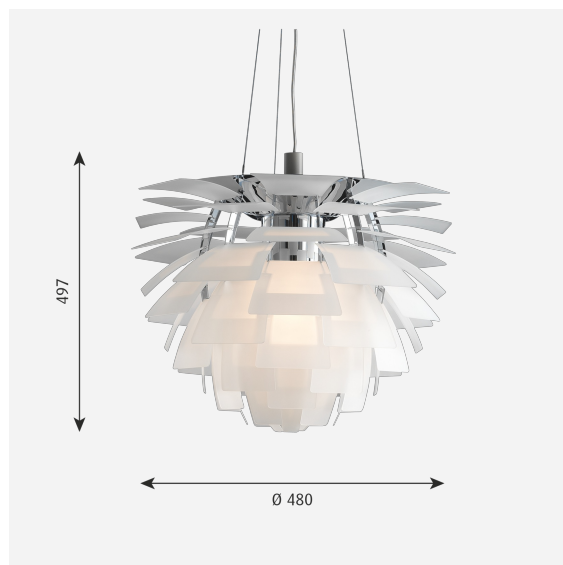


Related products




PH Artichoke




PH 5



PH Artichoke Pale Rose




PH Artichoke Yellow Glass




PH Artichoke Pequin Stripes

Light distribution diagrams


Cartesian

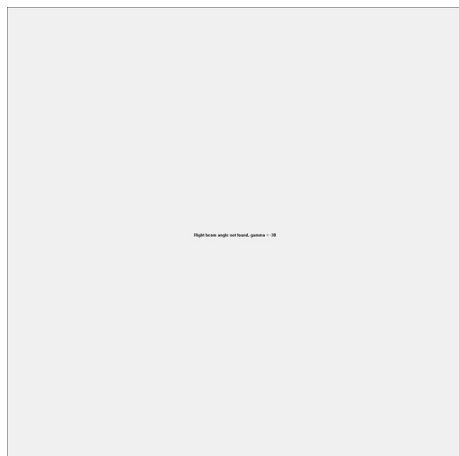

Isolux

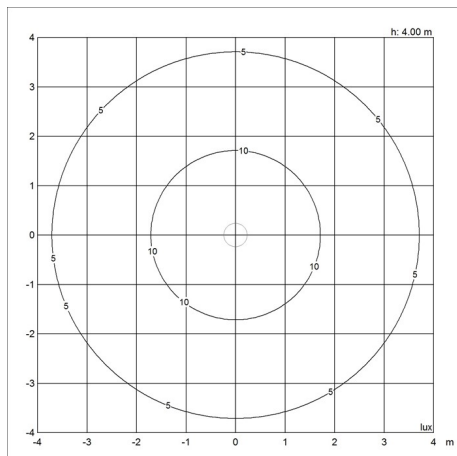

Polar

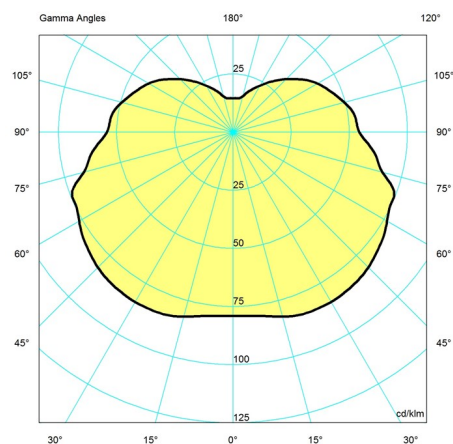

Spare parts & accessories

Product	Variant number
PH Artichoke/Louvre/Lp centrum canopy	5741480272
PH Artichoke Ø480, White canopy	5741086223
PH ART 600 GL SUSP LED-DA 27K90 EX/DRV	5741110063
PH ART 600 GL SUSP LED-DA 27K90 IN/DRV	5741110076
PH ART 600 GL SUSP LED-DA 3K90 EXT/DRV	5741110089
PH ART 600 GL SUSP LED-DA 3K90 INT/DRV	5741110092
PH ART 600 GL SUSP LED-WB 27K IN/DRV	5741110102
PH ART 600 GL SUSP LED-WB 3K90 INT/DRV	5741110115

Data specifications

Colour	Clear glass sandblasted	Length	480
Width	480	Height	570
Built-in Height	-	IP class	20
Class	I	Net Weight	10.9
Standby (W)	-	Power Factor (P = 100 % / P = 50 %)	-

PH Artichoke Glass

Inrush Current	-
Kelvin	-
SDCM	-
Watt	22
Light control	-
UGR Transversal / Axial	15.1/15.1
Driver life	-

Light source	1x100W E27
CRI	-
Lumen	1746
Efficacy	79
Min. Dim Level (%)	-
L80B50 (hours)	-