


PH SNOWBALL

PH Snowball - 5741115233


The fixture emits comfortable glare-free diffused light. Matt painted undersurfaces and glossy top surfaces result in an attractive reflection of the diffused light, creating uniform light distribution around the fixture.

When the light is switched on, the top portion is illuminated while the bottom part remains dark.



Poul Henningsen

The very influential Danish designer, architect, writer, and cultural critic, Poul Henningsen (1894-1967), has had a huge impact on Danish thinking and design. His legacy is an integrated part of Louis Poulsen's endeavor to shape light.

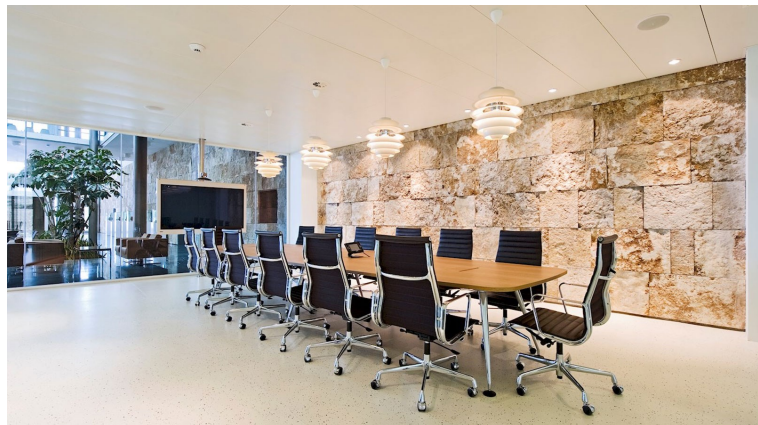

Product info

Mounting

E27: Cable 3 x 0,75 mm². Cable length: 3 m. Canopy: Yes. LED: Cable 2 x 1,5 mm². Cable length: 4 m. Canopy: Yes. LED canopy contains driver.

Finish

Wet painted outside in White, Dusty Blue, Dusty Blue or Soft White, and white painted inner side.
 High lustre chrome plated or polished brass metallised.

Materials

<p>Shades: Spun aluminium.
Frame: Brass metallised, die cast zinc or High lustre chrome plated, die cast aluminium.
Housing: Brass metallised, spun zinc or High lustre chrome plated, spun aluminium.</p>

Sizes and weights


width x Height x Length (mm) | 400 x 390 x 400 Max 4.5 kg

Class

Ingress protection IP20. Electric shock protection I w. ground.


Light source

1x70W E27

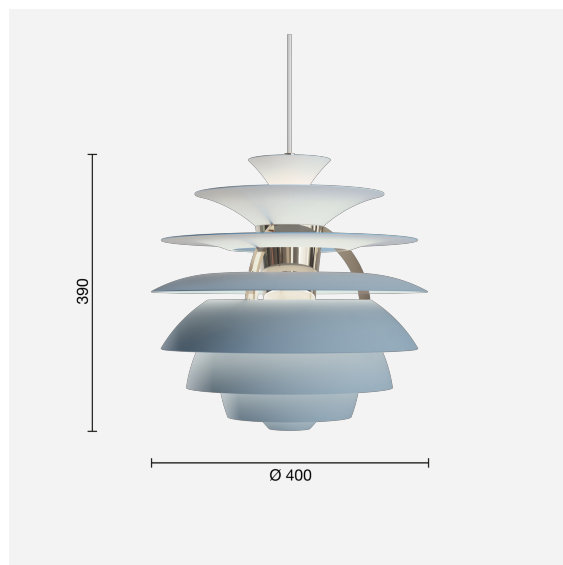


Light distribution diagrams


Cartesian

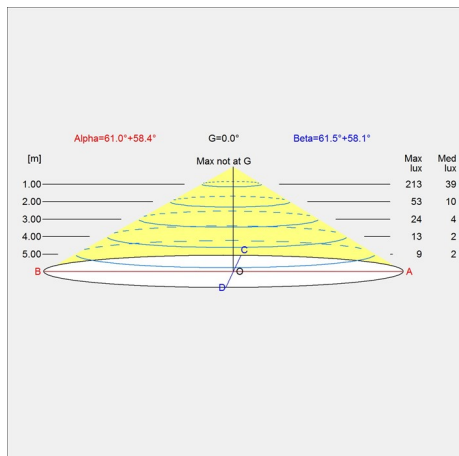

Isolux

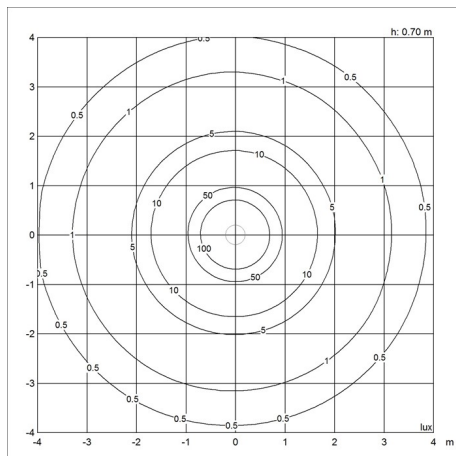

Polar

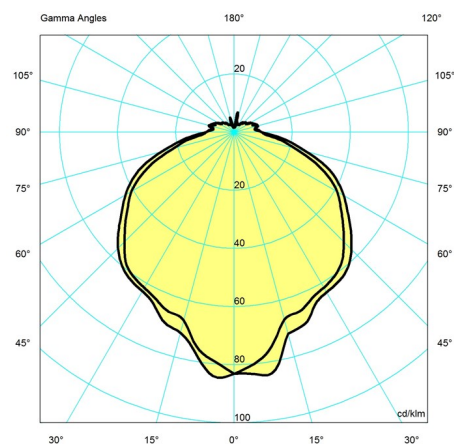

Spare parts & accessories

Product

Canopy White 2-part tophat @
PH Snowball bottom shade

Variant number

5749329034
5741086456

Data specifications

Colour	Dusty blue/high lustre chrome plated
Width	400
Built-in Height	-
Class	I
Standby (W)	-
Inrush Current	-
Kelvin	-
SDCM	-

Length	400
Height	390
IP class	20
Net Weight	1.8
Power Factor (P = 100 % / P = 50 %)	-
Light source	1x70W E27
CRI	-
Lumen	734

PH Snowball

Watt	21
Light control	-
UGR Transversal / Axial	14.2/14.2
Driver life	-

Efficacy	35
Min. Dim Level (%)	-
L80B50 (hours)	-