


PANTHELLA 250 PORTABLE


Panthella 250 Portable - 5744612759

The portable lamp has a translucent white opal shade, which provides a diffused ambient light, while directing some of the glare-free light downward onto the trumpet shaped base, that is designed to reflect some of the light upwards.



Verner Panton

Verner Panton (1926-1998) is famous for his inspirational and colorful personality. A unique person with a special sense for color, shape, light function and space. Over the course of his career, Panton introduced a series of modern lamps with personalities unlike any of his Scandinavian contemporaries.

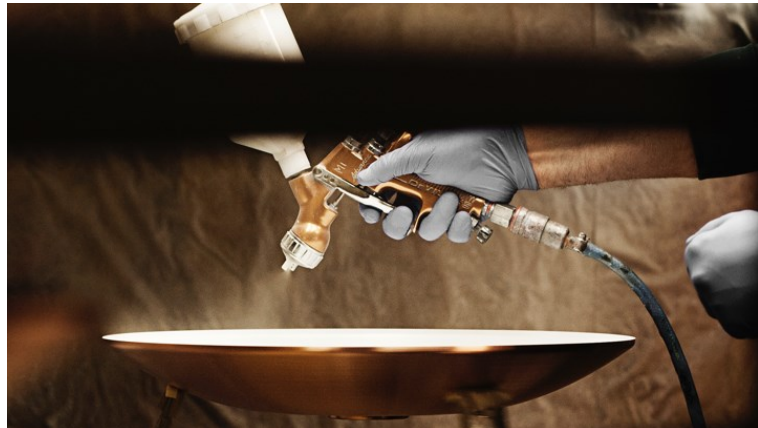

Product info

Information

Please note that Panthella 250 Portable comes with a USB cable but without adapter. Compatible with standard USB adapters (Min 1.5A).

Mounting

USB-C cable length: 1.5 m. to be used with standard USB-C adapter (min. 1.5A), white indicator on base when charging. Light control: Switch on base. Battery: 1 x lithium battery. Approximately battery lifetime: 100 % 5 hours. 33 % 18 hours. 10% 45 hours. Step dim, short press: 0%/10%/33%/100%. Power off: Long press. Battery replaceable by certified electrician.

Finish

White opal acrylic shade with white stand.

Materials

Shade: Injection molded acrylic. Base and Housing: Die cast aluminum. Diffuser: Injection molded opal PMMA.

Sizes and weights

Width x Height x Length (mm) | 250 x 335 x 250 Max 0.9 kg

Class

IP44. Electric shock protection III.

Light source

LED 2700K 6W


Lumen: 456

Information


Please note that Panthella 250 Portable comes with a USB cable but without adapter. Compatible with standard USB adapters (Min 1.5A).




Related products




Panthella 250 Table Lamp



Panthella 320 Table Lamp



Panthella 160 Portable



Panthella 160 Portable Metal



Panthella 400 Table Lamp



Panthella Floor

Light distribution diagrams

Cartesian | Solux | Polar

Spare parts & accessories

Product	Variant number
Panthella 250 Rep. Kit LED	5744613224
Panthella 250 Rep. Kit Print	5744613237
Panthella 250 Rep. Kit Battery	5744613240

Data specifications

Colour	White opal acryl	Length	250
Width	250	Height	335
Built-in Height	-	IP class	-
Class	-	Net Weight	0.9
Standby (W)	-	Power Factor (P = 100 % / P = 50 %)	-
Inrush Current	-	Light source	LED 2700K 6W
Kelvin	2700	CRI	90
SDCM	-	Lumen	456
Watt	6.0	Efficacy	76
Light control	-	Min. Dim Level (%)	-
UGR Transversal / Axial	11.9/11.9	L80B50 (hours)	>100.000
Driver life	>50.000		