




w182 Pastille c2

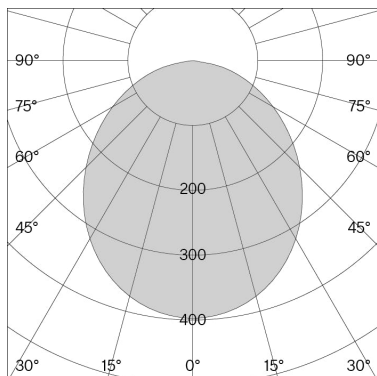

w182 Pastille c2

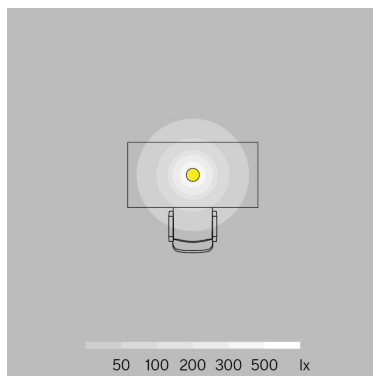

w182 Pastille b2

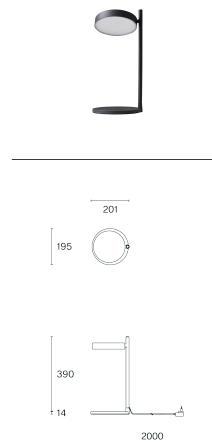

Technical information

Physical

Material	Lamp body: biopolyamide Table base/clamp: biopolyamide & steel Pin/bracket: biopolyamide Floor stand: steel
-----------------	---

Optics	Reflector: ABS Diffuser: polycarbonate
---------------	--

IP rating	20
------------------	----

Protection class	III
-------------------------	-----

LED

Light source	COB LED (included)
---------------------	--------------------

Life time expectancy	L80 / 50,000 h
-----------------------------	----------------

CRI Colour Rendering Index	96
-----------------------------------	----

Standard deviation of colour matching	3-step MacAdam
--	----------------





Replaceable by a professional

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wästberg Lighting AB apply.

Article-specific information

Version	b2
Mounting	Base
LED Colour temperature (CCT) / Luminous flux	2700 K / 457 lm
Voltage / System power	100–240 V / 7.3 W
Efficacy	63 lm / W
Light control	Dimmable
Net weight	1.8 kg
Packaging dimensions	L51.7 × W22.5 × H6.4 cm (0.007 m³)
Gross weight	3.3 kg

Colour

Soft white (NCS 1002Y50R)		182B20250 / 7330492008103
Graphite black (RAL 9011)		182B29011 / 7330492008110
Olive green (RAL 6003)		182B26003 / 7330492008097
Oxide red (RAL 3009)		182B23009 / 7330492008080

Accessories

Adapter suitable for Vitra AdHoc

Adapter suitable for Vitra Tyde

b2


Base	2700 K / 457 lm
	100–240 V / 7.3 W
	63 lm / W
	Dimmable
	1.8 kg
	L51.7 × W22.5 × H6.4 cm (0.007 m³)
	3.3 kg

Art. No. / EAN code


182B20250 / 7330492008103
182B29011 / 7330492008110
182B26003 / 7330492008097
182B23009 / 7330492008080

Art. No. / EAN code

w182 Pastille c1

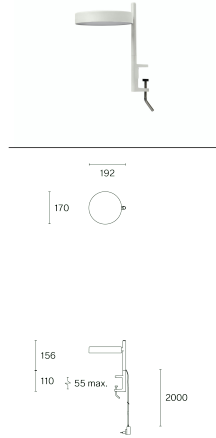



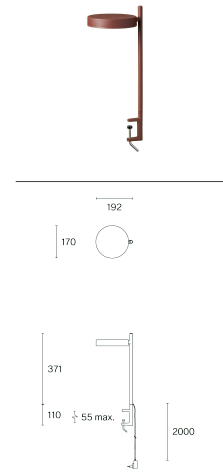

w182 Pastille c2




Article-specific information

Version	c1	c2
Mounting	Clamp	Clamp
LED Colour temperature (CCT) / Luminous flux	2700 K / 457 lm	2700 K / 457 lm
Voltage / System power	100–240 V / 7.3 W	100–240 V / 7.3 W
Efficacy	63 lm / W	63 lm / W
Light control	Dimmable	Dimmable
Net weight	0.8 kg	0.8 kg
Packaging dimensions	L51.7 × W22.5 × H6.4 cm (0.007 m ³)	L51.7 × W22.5 × H6.4 cm (0.007 m ³)
Gross weight	2.3 kg	2.3 kg


Colour	Art. No. / EAN code	Art. No. / EAN code
Soft white (NCS 1002Y50R) 	182C10250 / 7330492008226	182C20250 / 7330492008264
Graphite black (RAL 9011) 	182P29011 / 7330492008394	182C19011 / 7330492008233
Olive green (RAL 6003) 	182C16003 / 7330492008219	182C26003 / 7330492008257
Oxide red (RAL 3009) 	182C13009 / 7330492008202	182C23009 / 7330492008240

Accessories	Art. No. / EAN code	Art. No. / EAN code
Adapter suitable for Vitra AdHoc		
Adapter suitable for Vitra Tyde		

w182 Pastille p2

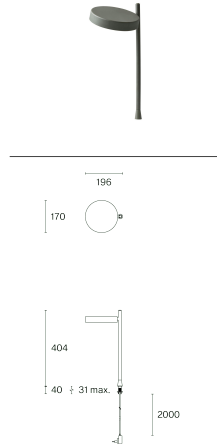


w182 Pastille f2

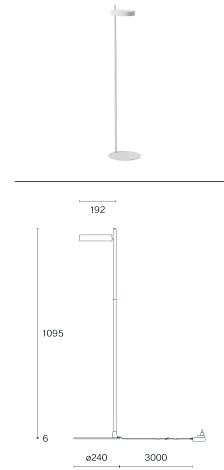


Article-specific information

Version	p2	f2
Mounting	Pin – Integrated (hole ø 20 mm)	Floor base
LED Colour temperature (CCT) / Luminous flux	2700 K / 457 lm	2700 K / 457 lm
Voltage / System power	100–240 V / 7.3 W	100–240 V / 7.3 W
Efficacy	63 lm / W	63 lm / W
Light control	Dimmable	Dimmable
Net weight	0.7 kg	3.4 kg
Packaging dimensions	L51.7 × W22.5 × H6.4 cm (0.007 m ³)	L75.0 × W32.5 × H5.0 cm (0.01 m ³)
Gross weight	2.2 kg	4.8 kg
Colour	Art. No. / EAN code	Art. No. / EAN code
Soft white (NCS 1002Y50R)	182P20250 / 7330492008387	182F20250 / 7330492008349
Graphite black (RAL 9011)	182P29011 / 7330492008394	182F29011 / 7330492008356
Olive green (RAL 6003)	182P26003 / 7330492008370	182F26003 / 7330492008332
Oxide red (RAL 3009)	182P26003 / 7330492008370	182F23009 / 7330492008325
Accessories	Art. No. / EAN code	Art. No. / EAN code
Adapter suitable for Vitra AdHoc		182-PVI01 / 7330492002460
Adapter suitable for Vitra Tyde		182-PVI03 / 7330492002477

w182 Pastille br1



w182 Pastille br2



Article-specific information

Version	br1	br2
Mounting	Wall bracket	Wall bracket
LED Colour temperature (CCT) / Luminous flux	2700 K / 457 lm	2700 K / 457 lm
Voltage / System power	100–240 V / 7.3 W	100–240 V / 7.3 W
Efficacy	63 lm / W	63 lm / W
Light control	Dimmable	Dimmable
Net weight	0.8 kg	0.8 kg
Packaging dimensions	L51.7 × W22.5 × H6.4 cm (0.007 m ³)	L51.7 × W22.5 × H6.4 cm (0.007 m ³)
Gross weight	2.3 kg	2.3 kg
Colour	Art. No. / EAN code	Art. No. / EAN code
Soft white (NCS 1002Y50R) 	182BR10250 / 7330492008141	182BR20250 / 7330492008189
Graphite black (RAL 9011) 	182BR19011 / 7330492008158	182BR29011 / 7330492008196
Olive green (RAL 6003) 	182BR16003 / 7330492008134	182BR26003 / 7330492008172
Oxide red (RAL 3009) 	182BR13009 / 7330492008127	182BR23009 / 7330492008165
Accessories	Art. No. / EAN code	Art. No. / EAN code
Adapter suitable for Vitra AdHoc		
Adapter suitable for Vitra Tyde		