



w201 Extra small pendant s1 traffic white

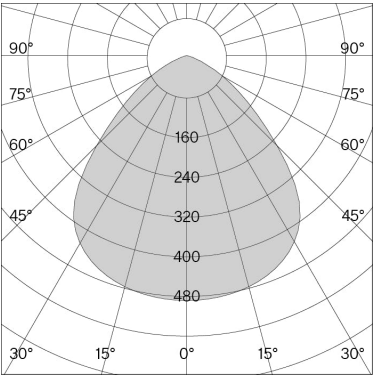


w201 Extra small pendant

w201 Extra small pendant s2 traffic white

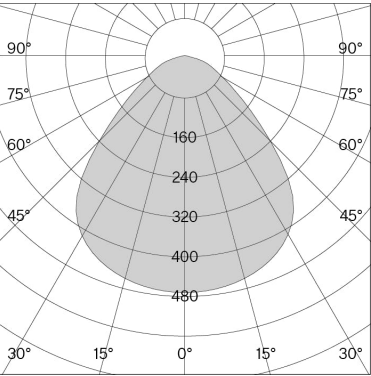

w201 Extra small pendant s1



Technical information

Physical	
Material	Shade: solid aluminium Canopy: polycarbonate
Optics	Reflector & diffuser prism: polycarbonate
IP rating	20
Protection class	II
LED	
Light source	COB LED (included)
Life time expectancy	L80 / 50,000 h
CRI Colour Rendering Index	97
Standard deviation of colour matching	3-step MacAdam
Replaceable by a professional	


The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wästberg Lighting AB apply.

Article-specific information


Version	
Mounting	
LED Colour temperature (CCT) / Luminous flux	
Voltage / System power	
Efficacy	
Light control	
Net weight	
Packaging dimensions	
Gross weight	
Phase-cut dim	
Traffic white (RAL 9016)	
Jet black (RAL 9005)	
Raw	
DALI dim-Push dim	
Traffic white (RAL 9016)	
Jet black (RAL 9005)	
Raw	

s1	
Ceiling suspended	
2700 K / 424 lm	
220–240 V / 7.8 W	
54 lm / W	
Phase-cut dim / DALI dim-Push dim	
0.4 kg	
L16 × W14 × H15 cm (0.003 m³)	
0.6 kg	
Art. No. / EAN code	
201S129016 / 7330492008608	
201S129005 / 7330492008615	
201S120002 / 7330492001180	
Art. No. / EAN code	
201S1290162 / 7330492000152	
201S1290052 / 7330492000169	
201S1200022 / 7330492001197	

w201 Extra small pendant s2

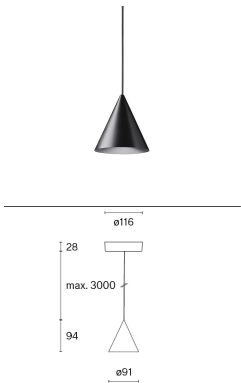

w201 Extra small pendant s3

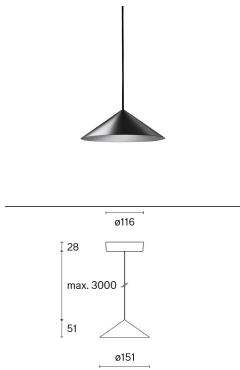

Article-specific information

Version
Mounting
LED Colour temperature (CCT) / Luminous flux
Voltage / System power
Efficacy
Light control
Net weight
Packaging dimensions
Gross weight

s2
Ceiling suspended
2700 K / 446 lm
220–240 V / 7.8 W
57 lm / W
Phase-cut dim / DALI dim-Push dim
0.6 kg
L14 × W14 × H17 cm (0.003 m³)
1.0 kg

s3
Ceiling suspended
2700 K / 446 lm
220–240 V / 7.8 W
57 lm / W
Phase-cut dim / DALI dim-Push dim
0.8 kg
L20 × W20 × H13 cm (0.005 m³)
1.2 kg

Phase-cut dim
Traffic white (RAL 9016)
Jet black (RAL 9005)
Raw

Art. No. / EAN code
201S229016 / 7330492008608
201S229005 / 7330492008615
201S220002 / 7330492001203

Art. No. / EAN code
201S329016 / 7330492008660
201S329005 / 7330492008677
201S320002 / 7330492001227

DALI dim-Push dim
Traffic white (RAL 9016)
Jet black (RAL 9005)
Raw

Art. No. / EAN code
201S2290162 / 7330492000176
201S2290052 / 7330492000183
201S2200022 / 7330492001210

Art. No. / EAN code
201S3290162 / 7330492000190
201S3290052 / 7330492000206
201S3200022 / 7330492001234