




w221 Medium pendant s1 traffic white

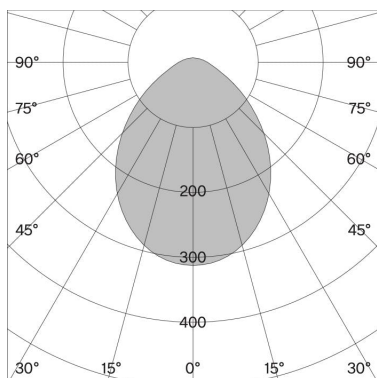

w221 Medium pendant s2 traffic white

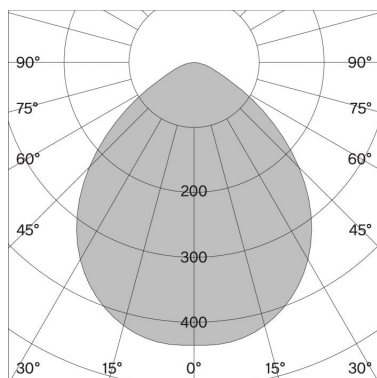

w221 Medium pendant s1



## Technical information

### Physical

<b>Material</b>	Shade: aluminium Canopy: polycarbonate
-----------------	--

<b>Optics</b>	Diffuser: acrylic
---------------	-------------------

<b>IP rating</b>	20
------------------	----

<b>Protection class</b>	I
-------------------------	---

### LED

<b>Light source</b>	LED (included)
---------------------	----------------

<b>Lifetime expectancy</b>	L80 / 50.000 h
----------------------------	----------------

<b>CRI Colour rendering index</b>	≥ 90
-----------------------------------	------

<b>Standard deviation of colour matching</b>	3-step MacAdam
--	----------------

### Replaceable by a professional

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wästberg Lighting AB apply.

## Article-specific information

### Version

### Mounting

### LED Colour temperature (CCT) / Luminous flux

### Efficacy

### Voltage / System power

### Light control

### Net weight

### Packaging dimensions

### Gross weight

### Phase-cut dim

### Traffic white (RAL 9016)

### Jet black (RAL 9005)

### Raw brushed

### DALI dim-Push dim

### Traffic white (RAL 9016)

### Jet black (RAL 9005)

### Raw brushed

### Accessories

### 1-phase track adapter white

### 1-phase track adapter black

### 3-phase track adapter white

### 3-phase track adapter black

### 3-phase track DALI adapter white

### 3-phase track DALI adapter black

### s1

### Ceiling suspended

### 2700 K / 614 lm

### 54 lm / W

### 220–240 V / 11 W

### Phase-cut dim / DALI dim-Push dim

### 1.6 kg

### L28.4 x W28.4 x H67.2 cm (0.05 m³)

### 3.0 kg

### Art. No. / EAN code

**221S102271** / 7330492000244

**221S105271** / 7330492000251

**221S120271** / 7330492001241

### Art. No. / EAN code

**221S102272** / 7330492000305

**221S105272** / 7330492000312

**221S120272** / 7330492001258

### Art. No. / EAN code

**ACC00102** / 7330492001920

**ACC00105** / 7330492001937


**ACC00202** / 7330492001944

**ACC00205** / 7330492001951


**ADAPT1-001** / 7330492001982

**ADAPT1-002** / 7330492001999

## w221 Medium pendant s2

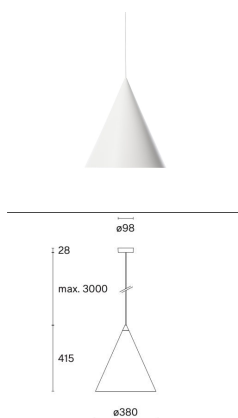

## w221 Medium pendant s3

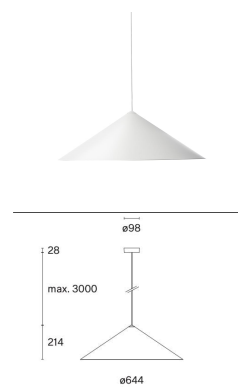

## Article-specific information

Version	s2	s3
<b>Mounting</b>	Ceiling suspended	Ceiling suspended
<b>LED Colour temperature (CCT) / Luminous flux</b>	2700 K / 922 lm	2700 K / 1008 lm
<b>Efficacy</b>	83 lm / W	91 lm / W
<b>Voltage / System power</b>	220–240 V / 11 W	220–240 V / 11 W
<b>Light control</b>	Phase-cut dim / DALI dim-Push dim	Phase-cut dim / DALI dim-Push dim
<b>Net weight</b>	2.1 kg	2.8 kg
<b>Packaging dimensions</b>	L44.1 x W44.1 x H48.2 cm (0.09 m <sup>3</sup> )	L72.7 x W71.3 x H27.2 cm (0.14 m <sup>3</sup> )
<b>Gross weight</b>	4.3 kg	7.4 kg
<b>Phase-cut dim</b>	<b>Art. No. / EAN code</b>	<b>Art. No. / EAN code</b>
Traffic white (RAL 9016) <input type="radio"/>	<b>221S202271</b> / 7330492000268	<b>221S302271</b> / 7330492000282
Jet black (RAL 9005) <input checked="" type="radio"/>	<b>221S205271</b> / 7330492000275	<b>221S305271</b> / 7330492000299
Raw brushed <input type="radio"/>	<b>221S220271</b> / 7330492001265	<b>221S320271</b> / 7330492001289
<b>DALI dim-Push dim</b>	<b>Art. No. / EAN code</b>	<b>Art. No. / EAN code</b>
Traffic white (RAL 9016) <input type="radio"/>	<b>221S202272</b> / 7330492000329	<b>221S302272</b> / 7330492000343
Jet black (RAL 9005) <input checked="" type="radio"/>	<b>221S205272</b> / 7330492000336	<b>221S305272</b> / 7330492000350
Raw brushed <input type="radio"/>	<b>221S220272</b> / 7330492001272	<b>221S320272</b> / 7330492001296
<b>Accessories</b>	<b>Art. No. / EAN code</b>	<b>Art. No. / EAN code</b>
1-phase track adapter white <input type="radio"/>	<b>ACC00102</b> / 7330492001920	<b>ACC00102</b> / 7330492001920
1-phase track adapter black <input checked="" type="radio"/>	<b>ACC00105</b> / 7330492001937	<b>ACC00105</b> / 7330492001937
3-phase track adapter white <input type="radio"/>	<b>ACC00202</b> / 7330492001944	<b>ACC00202</b> / 7330492001944
3-phase track adapter black <input checked="" type="radio"/>	<b>ACC00205</b> / 7330492001951	<b>ACC00205</b> / 7330492001951
3-phase track DALI adapter white <input type="radio"/>	<b>ADAPT1-001</b> / 7330492001982	<b>ADAPT1-001</b> / 7330492001982
3-phase track DALI adapter black <input checked="" type="radio"/>	<b>ADAPT1-002</b> / 7330492001999	<b>ADAPT1-002</b> / 7330492001999