

Tekiò Vertical

Anthony Dickens. 2017

Pendant lamps



SANTA & COLE



P1



A

P2



B

P3



C

P4



D



In its multiple sizes, Tekiò Vertical illuminates every space with intimacy. It gathers, inspires and enlightens. It sculpturally resolves spaces of varying heights by bathing them in uniform light. On its own or in repetition, its luminous intensity can range from a whisper to an exclamation.

General description:

Washi Japanese paper shade.

Metal structure.

Structure length:

(A) 67 cm / 26.4"

(B) 120 cm / 47.2"

(C) 173 cm / 68.1"

(D) 226 cm / 89"

White grey metallic circular ceiling plate with power supply incorporated.

Electric cable length: 5 m / 196.8"

Approximate weight (unpacked):

(A) Tekiò Vertical P1: 3 Kg / 6.6 lb

(B) Tekiò Vertical P2: 4,5 Kg / 9.9 lb

(C) Tekiò Vertical P3: 6 Kg / 13.2 lb

(D) Tekiò Vertical P4: 7,5 Kg / 16.5 lb

Tekiò Vertical

Anthony Dickens. 2017
Pendant lamps

Technical information:

Light source included (dimmable)

(A) LED module

Rated input wattage: 43 W (European version) / 34 W (American version)
Luminous flux: 1.251 lm (European version) / 964 lm (American version)

(B) LED module

Rated input wattage: 73 W (European version) / 56 W (American version)
Luminous flux: 2.190 lm (European version) / 1.687 lm (American version)

(C) LED module

Rated input wattage: 100 W (European version) / 73 W (American version)
Luminous flux: 3.128 lm (European version) / 2.315 lm (American version)

(D) LED module

Rated input wattage: 120 W (European version) / 87 W (American version)
Luminous flux: 4.067 lm (European version) / 3.051 lm (American version)

(A, B, C, D)

Operating voltage: 24VDC
CCT: 2.200K - 2.700K
CRI: 90
Lifetime: 40.000 h

Built-in LED

European version: suitable for dimming 1-10V / DALI. Not included external dimmer switch 1-10V / DALI.

American version: suitable for dimming 0-10V. Not included external dimmer switch 0-10V.


Dim to Warm control 2200K- 2700K.

Suitable only for indoor use.

Always use this light source.

Input voltage: 100 ~ 277 Vac.

(50 Hz / 60 Hz). According to destination.

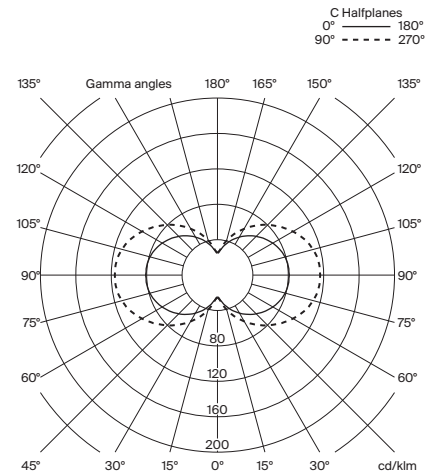

Regulations:

European version
UNE-EN 60598
UNE-EN 55015
UNE-EN 60529

American version
Dry location only
UL-1598
UL-8750
E-336377

Maintenance:


Clean with a smooth cloth. Do not use ammonia, solvents or abrasive cleaning products.

Others:


The lamp is delivered in different packages.

The assembly instructions are delivered with the product.

Models: Tekiò Vertical (European version):

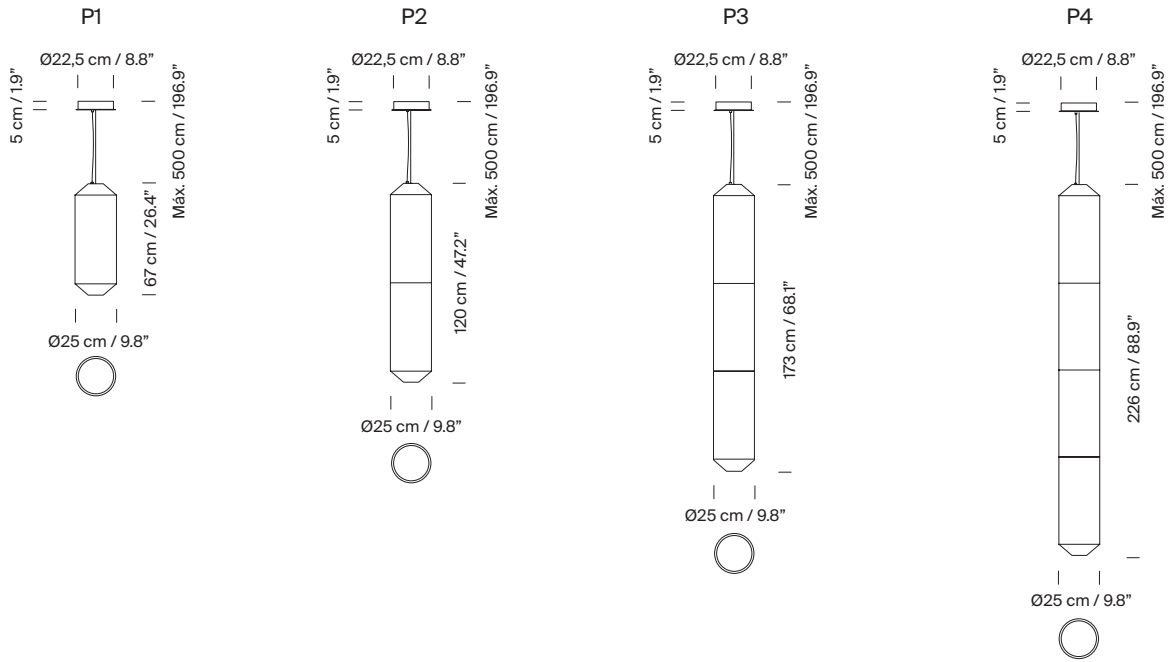

Modelos: Tekiò Vertical (American version):

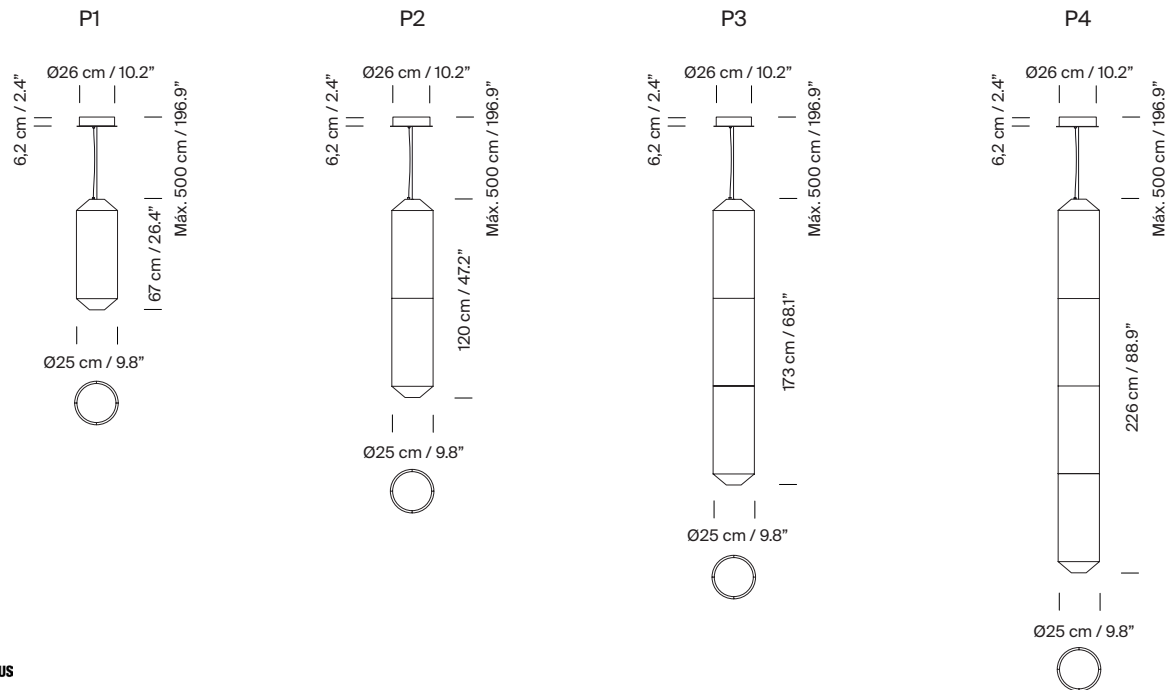

Collection:
Pendant lamps



Tekiò Vertical



Tekiò Horizontal



Tekiò Circular