

Semi Pendant - Metal Ø30, EU


Designed by Bonderup & Thorup - 1968



ITEM NUMBER	Semi Pendant - Metal Ø30 (Shade: Polished Brass)	10015228
	Semi Pendant - Metal Ø30 (Shade: Chrome)	10015229
	Semi Pendant - Metal Ø30 (Shade: Copper)	10015227


DESCRIPTION	<p>The Semi Pendant is a unique pendant lamp, based on two quarter-circles put together, back-to-back. It's distinctive arch-shaped, enamelled metal shade creates a diffused, cone-shaped light, ideal over a dining table or kitchen work surface. With its lightness of form, unique timeless design and range of colours and sizes, the Semi Pendant is extremely versatile and well suited to both private and public spaces.</p>
	<p>The Semi Pendant was designed in 1968 as a product of the creative partnership between Claus Bonderup and Torsten Thorup. Reacting against the soft organic forms, the so-called cosy era, that was dominating Denmark at the time, Bonderup and Thorup wanted to create a lamp that incorporated sharp, clean lines and a geometric shape. Their design was submitted for a competition at the Royal Danish Academy of Fine Arts, School of Architecture and won first prize. In the 1980s the pendant achieved great success and became, at that time, the best-selling Danish design and gained worldwide recognition and iconic status.</p>

Materials & Finishes

SHADE FINISH	Polished brass, Chrome, Copper
	
CANOPY FINISH	Polished brass, Chrome, Copper (Color same as shade)
CORD SHAPE	Round
CORD COLOR	Black textile
MATERIALS	Metal

---

Dimensions

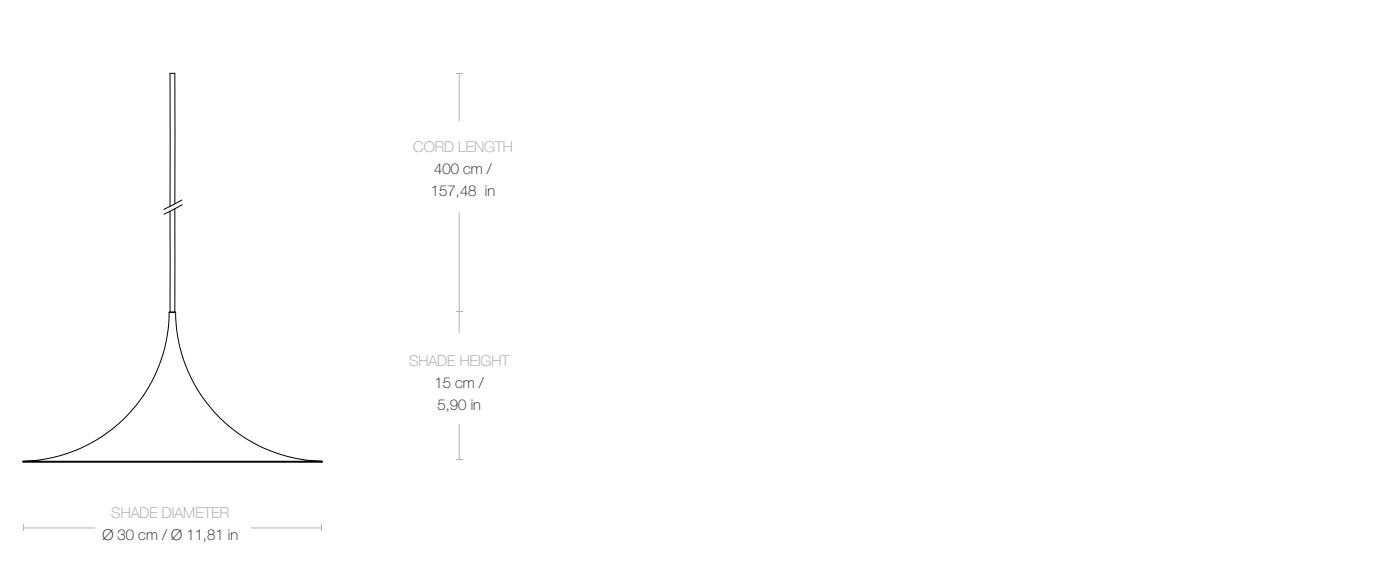

LAMP DIAMETER	Ø 30 cm
LAMP HEIGHT	15 cm
SHADE DIAMETER	Ø 30 cm
SHADE HEIGHT	15 cm
CANOPY DIAMETER	Ø 11,5 cm
CANOPY HEIGHT	6 cm
CORD LENGTH	400 cm

---

Weight

TOTAL WEIGHT	1 kg
--------------	------

Number of parcels	1
PACKAGING LENGTH	33 cm
PACKAGING WIDTH	33 cm
PACKAGING HEIGHT	21 cm
PACKAGING WEIGHT	0,8 kg
GROSS WEIGHT	1,8 kg


---

### Electrical Specifications

BULB SOCKET	E14
RECOMMENDED BULB	4W-6W LED, 470 lm
VOLTAGE	240V
BULB INCLUDED	No

---

### Test & Certifications

CERTIFICATION	  
ISOLATION CLASS	II
IP CLASSIFICATION	20