





± Ø100mm

Image shown above 14.1 with round canopy

Series 14

Mounting Ceiling mounted

Glass Colours Clear, grey, amber

Lamp 1W LED, 2700K, 100Im
10W Xenon, 2600K, 81Im

Coaxial Length 3000mm standard / up to 30500mm maximum

Adustable length: 14.1 - 14.9

Non-adjustable length: 14.11 - 14.50

Canopy Finishes 14.1 - 14.7: white, black or brushed nickel canopy

14.1mi/mo: white polyurethane canopy

14.9 - 14.50: white canopy

Materials Cast glass, blown borosilicate glass, braided metal coaxial

cable, electrical components, steel canopy

Power Supply Integral

Remote mounted for 14.1m/mo/mi

Bocci recommends remote mounting power supplies for ease

of long-term maintenance.

Environment Indoor, dry location. IP30

Note Every single Bocci product is handmade. Each one is variously

blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are

individual, irregular expressions of our research.

Registration ® 14 Series product design protected as U.S. Reg. No.

7,129,209

Certifications



Weight (kg)



Round

14.1	2
14.3	5.5
14.5	9.5
14.7	14
14.11	30
14.14	37
14.20	51
14.26	61.5
14.36	83.5



Square

14.11	30
14.16	40.5
14.26	63.5
14.36	105
14.50	109.6




Rectangle


14.9	25.9
14.11	30
14.14	36.5
14.16	41.4
14.20	63
14.26	74
14.36	83.5



ADJUSTABLE LENGTH

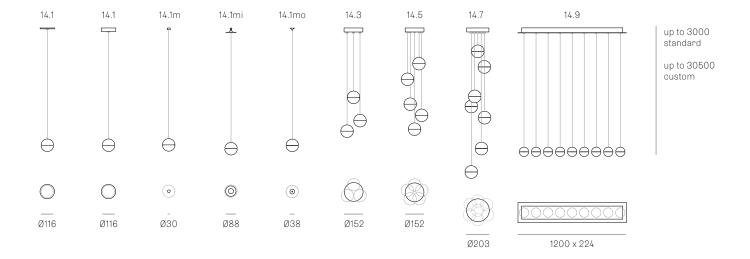

NON-ADJUSTABLE LENGTH

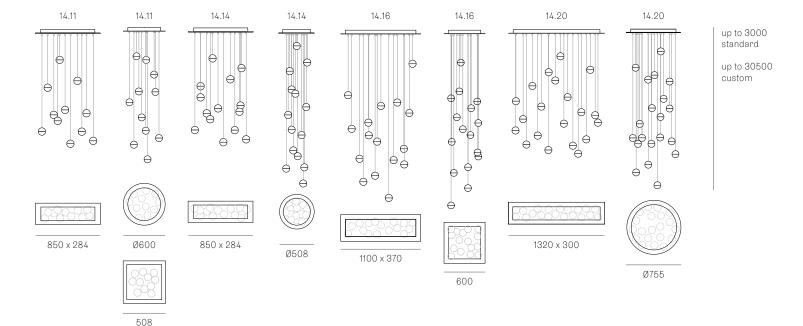


Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire guage in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.



NON-ADJUSTABLE LENGTH

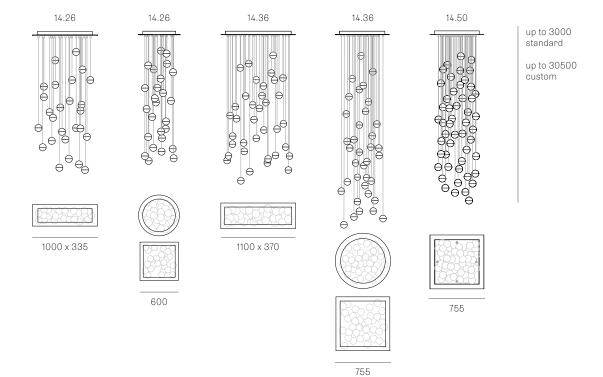

All dimensions are in millimeters (mm) unless otherwise specified.