



Gong ø600

Francesc Vilaró

Surface-mounted ceiling light Gong ø600 LED 32.4W 4000K DALI-2 Black Teixit GRIS 2088lm

Technical features

Luminaire total power: 32.4W

Real lumens: 2088

Real lm/W: 64

Correlated Colour Temperature (CCT): 4000K

UGR: <=22

Structure material: Steel

Structure finish: Black, Teixit GRIS

Diffuser material: Methacrylate

Diffuser finish: MICROPRISMA, Matt


Voltage / frequency: 110-277V ~ 50/60Hz

Dimming protocol: DALI-2

Power Factor: 0.97

Useful life: 50,000h L80B20

Warranty: 5 years



Luminotechnic features

CRI: 92

MacAdam steps: 5

Photobiological risk: RG1

UGR		Lampholder	Quantity	Light source power (W)
S=0.250				
Ceiling / cavity	0.7	LED	1	31.2W
Walls	0.5			
Working Plane	0.2			
Room dimensions	X=4H, Y=8H			
UGR crosswise	19.4			
UGR lengthwise	19.4			


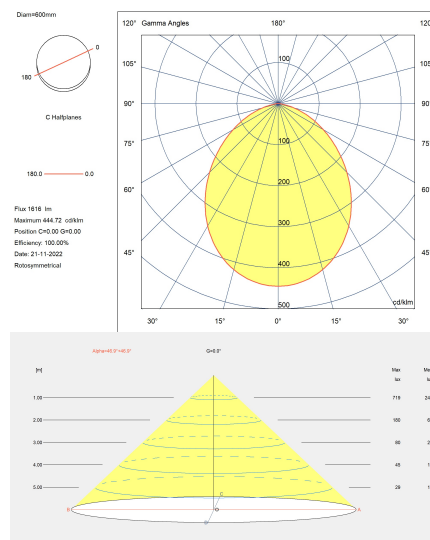


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

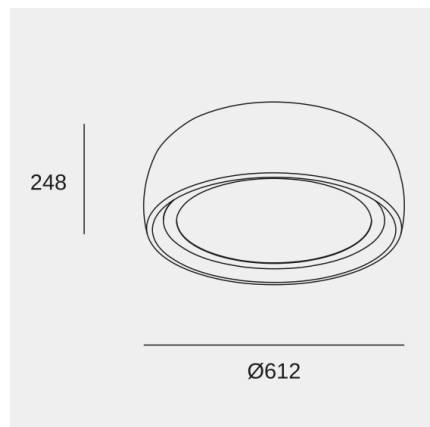

Gong ø600

Francesc Vilaró

Surface-mounted ceiling light Gong ø600 LED 32.4W 4000K DALI-2 Black Teixit GRIS 2088lm

Logistics



x 1

Net weight (kg): 6.52

Packaged weight (kg): 10.44

Packaging: 645mm x 645mm x
345mm

Light application



Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.