




PROJECT

TYPE


NOTES

QUANTITY

DATE

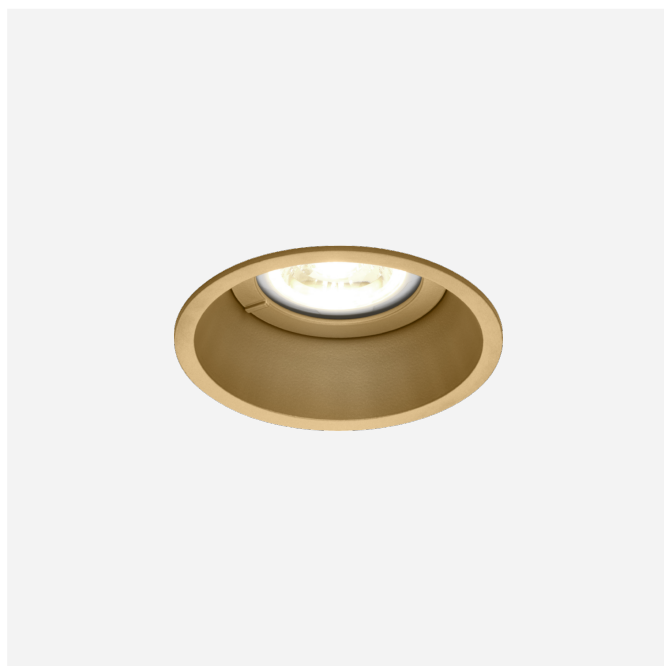

Round ceiling recessed downlight made from die-cast aluminium; surface Champagne; wet painted, smooth semi glossy; No matching RAL; installation without tools using blade springs; suitable for ceiling thickness of min. 10 mm; recessed depth 115 mm; lamp socket GU10; lamp type PAR16; max. 12W; 100 - 240 V; degree of protection IP20; Class 2; lamp not included;



ø84

108

LUMINAIRE

Ceiling
Recessed
Champagne
No matching RAL
IP20
Interior

LAMP

lamp PAR16
socket GU10
max. per socket 12.0 W
CRI ≥ 90

Optical

UGR ≤ 16

Electrical

100 - 240 V
Class II
Standard

Physical

diameter 84 mm
height 108 mm
0.12 kg
blade springs

Cutout



diameter 76-79 mm
min. ceiling thickness 10 mm
recessed depth 115 mm

MEASURED LAMPS

PAR16 LAMP 2700K CRI90
450 lm

PAR16 LAMP 3000K CRI90
470 lm

LIGHT DISTRIBUTION



**ELECTRICAL ACCESSORIES****LED LAMPS**

Type	Colour	Voltage	Item number
	Black Texture		W901228B3
	Black Texture		W901228B5

LAMPS**PAR16 LED Lamp**

Type	Colour	Voltage	Ø·H (MM)	Item number
2700K >90 CRI GU10	White		50-60	901228W3
3000K >90 CRI GU10	White		50-60	901228W5
2700K >80 CRI GU10	Silver		50-55	905227S2
3000K >80 CRI GU10	Silver		50-55	905227S4