




PROJECT

TYPE


NOTES

QUANTITY

DATE

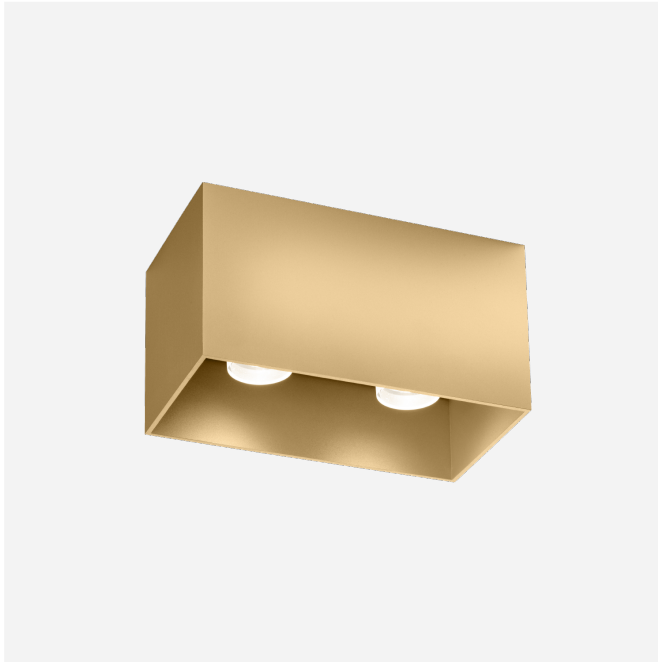

Rectangular ceiling surface mounted downlight made from die-cast aluminium; surface Champagne Brushed; No matching RAL; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90 ; 220 - 240 V; degree of protection IP20; Class I; UGR ≤ 13 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above $65^\circ \leq 3000 \text{ cd/m}^2$; optional double inner reflector and single inner cover available; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



LUMINAIRE

Ceiling
Surface
Champagne Brushed
No matching RAL
IP20
Interior
1230 lm

LED Module

3000 K
CRI ≥ 90
L70 / 50000h
 ≤ 3 SDCM (initial MacAdam)
1520 lm
94 lm/W^a

Optical

Medium (standard)
beam angle 21°
UGR ≤ 13
CIE flux code: 93 99 100 100
100
 $\geq 65^\circ < 3000 \text{ cd/m}^2$

Electrical


phase-cut dim
220 - 240 V
system 16.1 W
Class I
Standard

Physical

length 188 mm
width 100 mm
height 100 mm
1.08 kg

^a Without electrical and optical losses

LIGHT DISTRIBUTION



[186258M5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of $\pm 10\%$, those for the electrical connected load are initially subject to a tolerance of $\pm 10\%$, and those for the colour temperature are initially subject to a tolerance of $\pm 150 \text{ K}$. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0	0	0	0	0
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

OPTICAL ACCESSORIES

Double Inner Reflector

Type	Colour	Voltage	L·W·H (MM)	Item number
BOX 2.0 max. 10W	Black		181-93-50	911251B1
BOX 2.0 max. 10W	Gold		181-93-50	911251G1
BOX 2.0 max. 10W	Champagne		181-93-50	911251M1
BOX 2.0 max. 10W	White		181-93-50	911251W1

Single Inner Cover

Type	Colour	Voltage	L·W·H (MM)	Item number
BOX max. 10W	Black		62-62-49	911011B1
BOX max. 10W	Gold		62-62-49	911011G1
BOX max. 10W	Champagne		62-62-49	911011M1
BOX max. 10W	White		62-62-49	911011W1