




**PROJECT**

**TYPE**


**NOTES**

**QUANTITY**

**DATE**

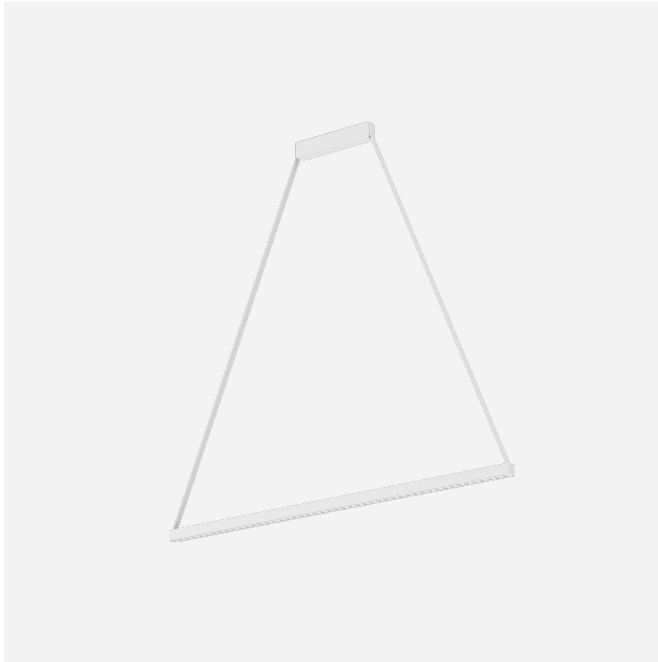

Suspended luminaire made from aluminium; inclusive cable suspension max. 2500 mm; surface White Matt; powder coated; matt texture; No matching RAL; PCB 3-step binning; phase-cut dim; light colour 3000 K; CRI  $\geq 90$ ; 220 - 240 V; beam angle 67°; degree of protection IP20; Class 1; inclusive 2 ceiling brackets; driver included;



**LUMINAIRE**

Ceiling  
Suspended  
White Matt  
No matching RAL  
IP20  
Interior  
1750 lm

**LED Module**

3000 K  
CRI  $\geq 90$   
 $\leq 3$  SDCM (initial MacAdam)

**Optical**

Wide  
beam angle 67°

**Electrical**

phase-cut dim  
220 - 240 V  
system 18.0 W  
Class I  
Standard

**Physical**

length 1004 mm  
width 25 mm  
height 25 mm  
0.75 kg  
cable length max. 2500 mm